

## LSCN Series

Vandal resistant linear dual-mode battery unit



### Housing

- White high impact thermoplastic housing
- Frosted lens

### Mounting

- Standard surface ceiling and wall mount
- Optional accessory: semi-recessed ceiling mount

### LED information

- Easily adjustable LED strips for multiple beam angles
- Color temperature: 4000K
- 1200-1300 lumen output in emergency

### Electronics

- Dual-mode; normal lighting (field selectable) and emergency lighting
- Self-test and self-diagnostic
- Lithium-ion phosphate battery offering 120 minutes of emergency lighting
- Battery over/under charge protection
- Universal voltage 120V through 277Vac-60Hz

### Approvals

- Rated for 41°F to 113°F (5°C to 45°C)
- Suitable for wet locations
- Meets IP65 rating
- Meets IK10 rating requirements<sup>1</sup>
- ROHS compliant
- UL924 approved

### Warranty (subject to proper installation and maintenance)

Unit has a three-year warranty


Detailed warranty terms located online at: [www.lightalarms.com](http://www.lightalarms.com)

<sup>1</sup>IK ratings refer to impact tests. IK10= Protected against 20 joules of impact (equivalent to 11lbs. of mass dropped from 16" high)




### Spacing

Mounting type	Spacing at 9ft mounting	Lumens
Ceiling mount	62'	1300
Wall mount	53'	1200

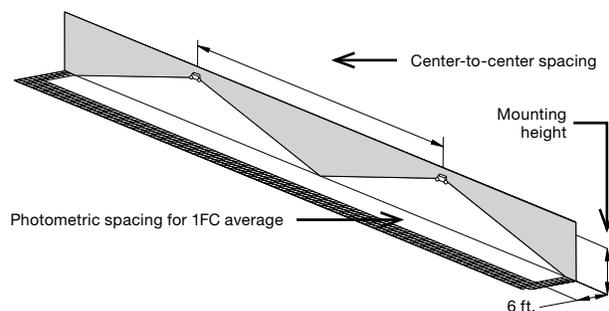

**Dimensions** (Dimensions are approximate and subject to change)

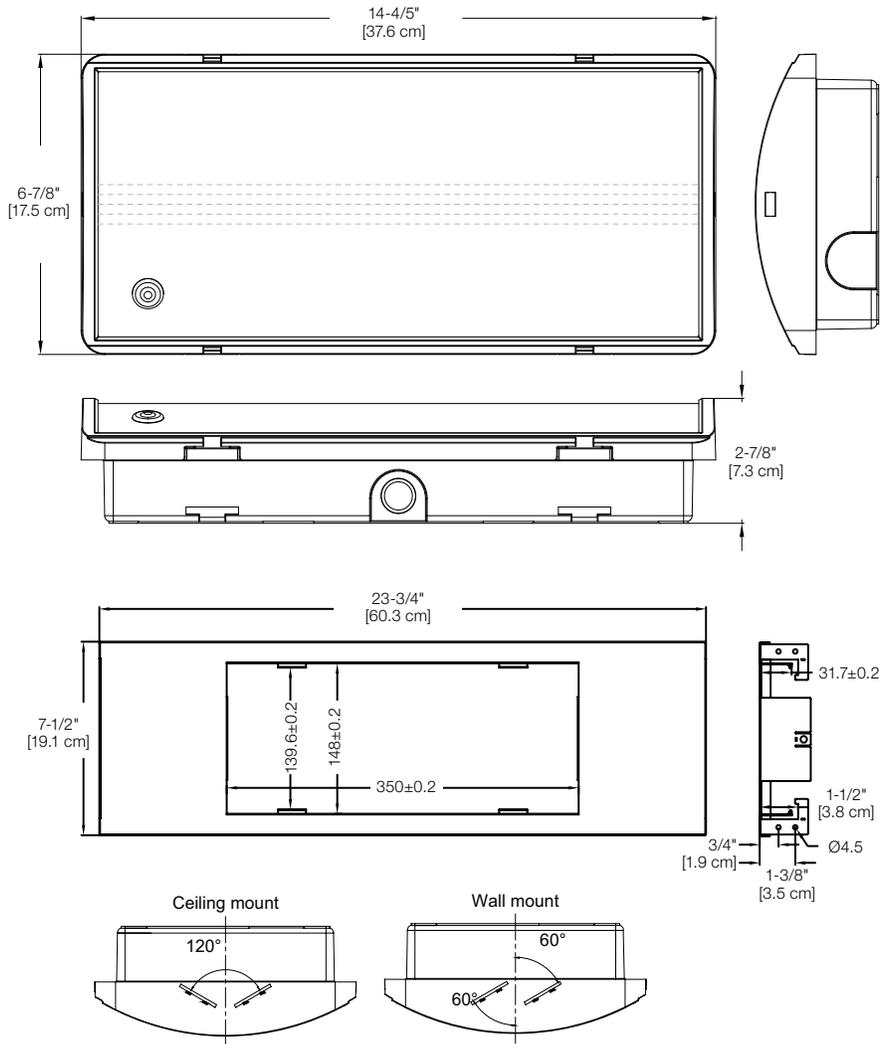

**Power consumption**

Status	Voltage	Wattage	Battery
Normal lighting	120-277 volt	16 watts	LifeP0 9.6 volt 3200mAh
Emergency lighting		14 watts	

**Accessories** (order as a separate item)

Description	Product code
Semi recessed mounting bracket	KIT-SR-LA

**Ordering format**

**Series**

**LSCN**= Linear battery unit

**EM**= Dual-mode: normal lighting and/or emergency lighting

**Example: LSCN-EM**