

4 Conductor Jumper Cable

Date: _____
Type: _____
Firm Name: _____
Project: _____

For use with Graze MX/QLX/EC
luminaires, End-to-End, Black, UL/
cUL

JUMPER CABLE

For use with Graze MX/QLX/EC Powercore luminaires



Specifications

Due to continuous improvements and innovations, specifications may change without notice.


Physical

Dimensions	315 mm (12.4 in) (Length)
Weight	0.28 kg (0.62 lb)
Connections	Self-locking, male-female connectors
Cable	4 conductor, Annealed flexible stranded or solid copper, Class 5 to EN 60228 (or H05VV-F)
Outer Cable Insulation	EM2 60° C, not halogen free
Inner Wire Insulation	EPR (Ethylene Propylene Rubber)
Wire Gauge	12 AWG
Voltage	100 to 277 VAC
Temperature Range	-40 to 50 °C (-40 to 122 °F) Operating

Certification and Safety

Environment	Dry/Damp/Wet Location, IP66
Certification	UL/cUL

Dimensions

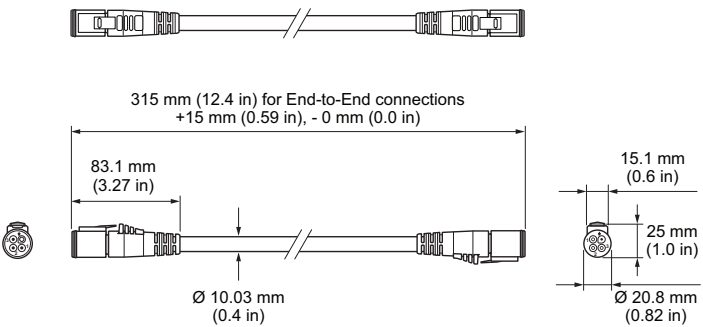

Part Numbers

Jumper Cable

4 Conductor Jumper Cable
For use with Graze MX/QLX/EC luminaires, End-to-End, Black, UL/cUL
Allows end-to-end connection of units
ZCS459 CONNECTOR BK UL

Use Item Number when ordering in North America.

Item Number	Item 12NC
108-000057-00	910503703139

© 2024 Signify Holding. All rights reserved. Specifications are subject to change without notice.
No representation or warranty as to the accuracy or completeness of the information included
herein is given and any liability for any action in reliance thereon is disclaimed.

11/15/2024

