
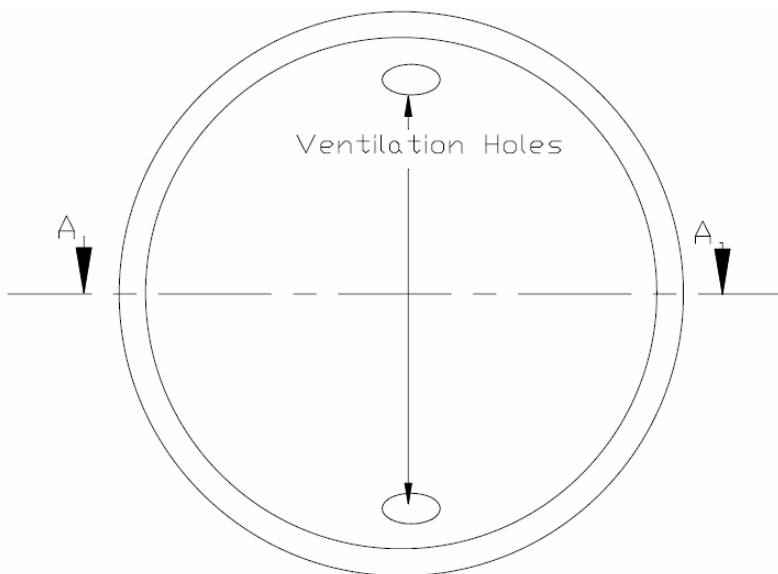


MODEL FF109-300

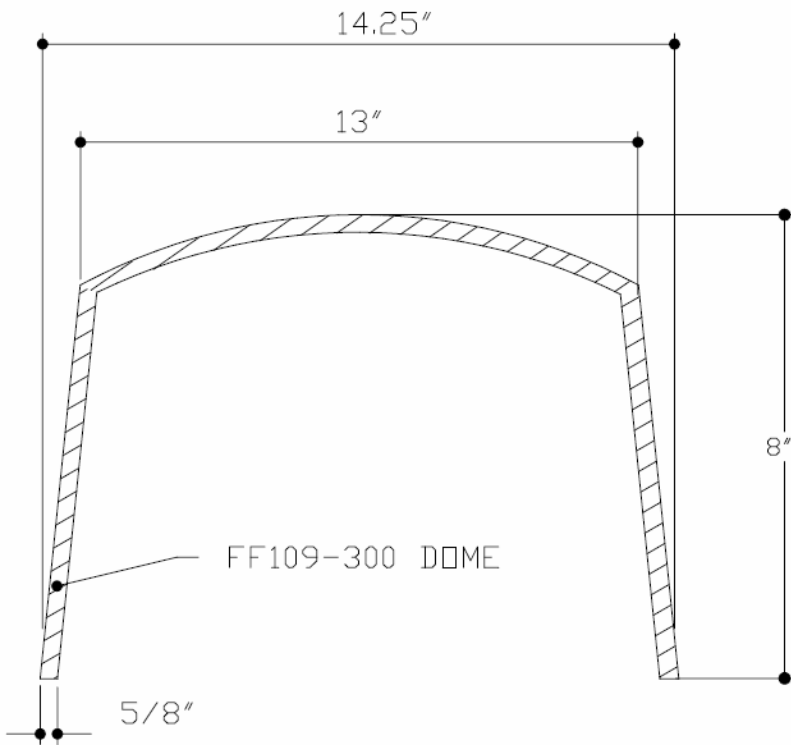

Model Number	Inside Height	Inside Diameter
FF109-300	7 3/8"	13"

Performance Data

For Use:

- UL Classified to maintain the fire rating (1 hour) for the following fire-rated floor/ceiling assemblies:

L500 Series



General Information

Benefits:

- 60 minute protection
- Fits most popular IC rated fixtures
- Can be used in L500 floor/ceiling assemblies
- Lightweight (approx. 1.5 lbs)
- Easy Installation—can be fitted in seconds—no screws, drilling or additional sealant required
- Flexible material enables cover to be fitted around obstacles or retro-fitted
- Enhances the acoustic protection of the ceiling
- Reduces heat loss through the fixture
- Significant energy cost savings
- Maintenance free

Manufactured By

Tenmat Inc

23 Copper Drive
Newport, DE 19804
Phone: (302) 633-6600
Fax: (302) 633-6838
Email: info@tenmatusa.com
www.TenmatUSA.com