

MICRO

Microline 14x14 Wall Wash Flex



FEATURES

- Discreet 9/16" x 9/16" form factor.
- Max 230 lumens per foot delivered.
- Full range of mounting and finish options available.
- Homogenous light distribution.

HOUSING

- Available in black, white, polished brass, gold, and brushed chrome finishes.

MOUNTING

- Surface mount with U-clips or L mounting brackets.
- Capable of being mounted directly to magnetic surfaces.

ELECTRICAL/CONTROLS

- 6W per foot.
- 24V constant voltage remote driver required.
- Maximum 16' run per 96W driver. See wiring guide.

LISTING

- cULus Listed to UL2108

LED INFO

- SMD LED: 90, 95 CRI: SDCM = 3-step MacAdam Ellipse, Lumen Maintenance: $L_{70} > 50,000$ hrs

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	MICRO	microline
TYPE	MF3-WW	microline flex 14x14 wall wash
LED	SW	standard white
SIZE	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16	1 link, 2-1/2", 55lm delivered 2 link, 5-1/2", 110lm delivered 3 link, 8-1/2", 165lm delivered 4 link, 11-7/16", 220lm delivered 5 link, 14-3/8", 275lm delivered 6 link, 17-5/16", 330lm delivered 7 link, 20-1/4", 385lm delivered 8 link, 23-1/4", 440lm delivered 9 link, 26-3/16", 495lm delivered 10 link, 29-1/8", 550lm delivered 11 link, 32", 605lm delivered 12 link, 35", 660lm delivered 13 link, 38", 715lm delivered 14 link, 41", 770lm delivered 15 link, 44", 825lm delivered 16 link, 46-7/8", 880lm delivered
CCT	18K 22K 24K 27K 30K 35K 40K	1800K 2200K 2400K 2700K 3000K 3500K 4000K (0.75) (0.80) (0.88) (0.95) (1.00) (1.03) (1.06)
CRI	90 95	90 CRI+ 95 CRI+
LENS OPTIONS	UD	ultra diffused
FINISH	BK WH BS GD AL	black white polished brass gold brushed chrome
VOLTAGE	24	24V
ACCESSORIES	See page 2 for details.	

Follow the steps to specify your fixture, example:

MICRO - MF3 - WW - SW - 6 - 30K - 95 - UD - BK - 24

NOTES


1. Available in 18K/22K/24K.

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

POWER TABLE

MICRO	DELIVERED LUMENS	LED POWER
NO. LINKS	LUMENS (3000K)	W (95CRI+)
1 LINK	55	2
2 LINK	110	3
3 LINK	165	3.6
4 LINK	220	5
5 LINK	275	6
6 LINK	330	8
7 LINK	385	9
8 LINK	440	10
9 LINK	495	11
10 LINK	550	12
11 LINK	605	14
12 LINK	660	15
13 LINK	715	16
14 LINK	770	17
15 LINK	825	18
16 LINK	880	20

PRODUCT DIMENSIONS

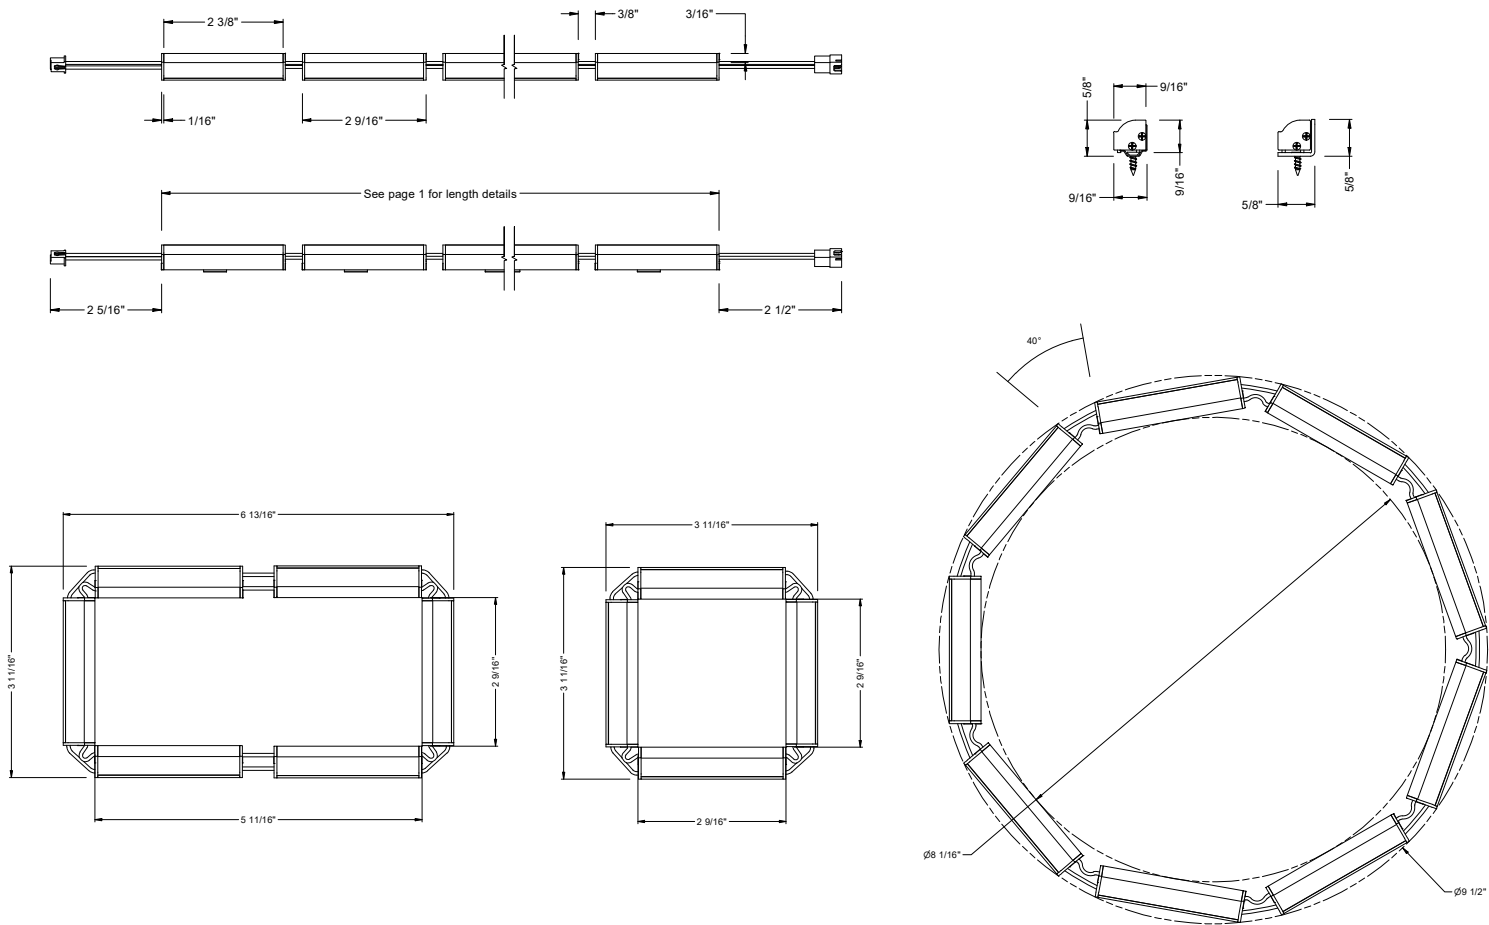

ACCESSORIES

MICRO-EXT-HARNESS ¹	40" extension harness, microline to driver
MICRO-DRIVER-HARNESS	12" wire leads with female plug, included with driver
MICRO-LBRKT ^{2,3}	mounting L-bracket
MICRO-UCLIP ^{2,3}	mounting U-clip
MICRO-SCREW ^{2,3}	screw for U-clip and brackets

NOTES
1. Do not use more than five (5) harness extensions on a single run.
2. Mounting accessories are only for additional or spare circumstances.
3. All Microline include adequate quantity of mounting components.
4. Must order one per link.

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

REMOTE DRIVER - 24VDC DRIVER

SERIES	P70501-MICRO	LED driver with box and harness
VOLTAGE	24	24V
DIMMING	DIM10	0-10V dimming to 1%
ELECTRICAL OPTIONS	96	96W

ORDERING CODE



Follow the steps to specify your fixture, example:
P70501 - MICRO - 24 - DIM10 - 96

DESCRIPTION

- 0-10V dimmable smooth flicker free dimming down to 1%
- Integrated junction box with multiple 7/8" knockouts
- UL2043 plenum rated


ELECTRICAL/CONTROLS

- 120-277Vac, 50/60Hz input
- 24Vdc, 96W output
- 0-10V compatible
- Operating temperature: -13°F to 104°F
- Class II rated
- Short circuit protection
- Overload protection
- Over-voltage protection
- Thermal protection
- IP 66 rated

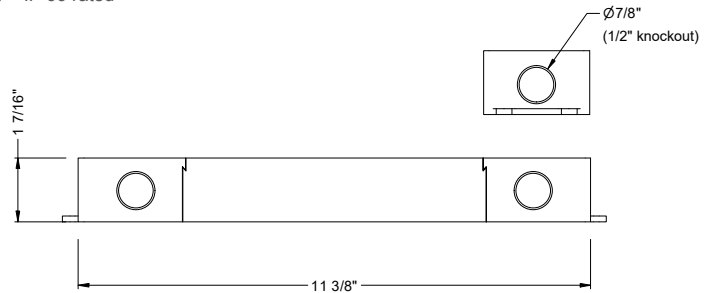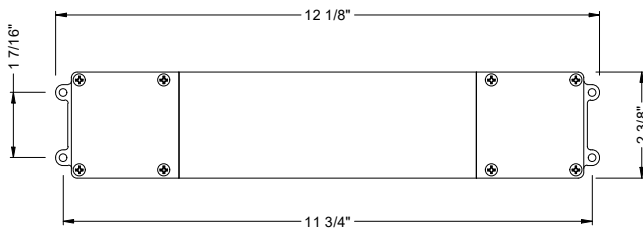

WIRING GUIDES

SERIES




NOTE: 0W - 70W systems wired in series OK.
Drawing not to scale.

REMOTE FIXTURE DISTANCE	
AWG VALUE	DISTANCE (FT)
20 AWG (USING MICRO-EXT-HARNESS)1	16.4
16 AWG (BY OTHERS)	30
14 AWG (BY OTHERS)	50
12 AWG (BY OTHERS)	70

1. Five (5) harness extension maximum used to achieve distance.

PARALLEL

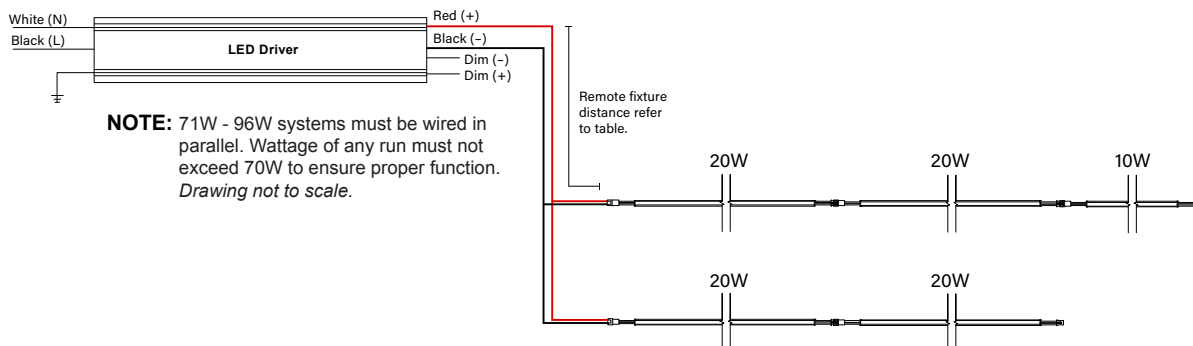

NOTE: 71W - 96W systems must be wired in parallel. Wattage of any run must not exceed 70W to ensure proper function.
Drawing not to scale.