

JOB NAME

CONTACT


ORDERING CODE



LM-79

BINA

Bina Pendant Square

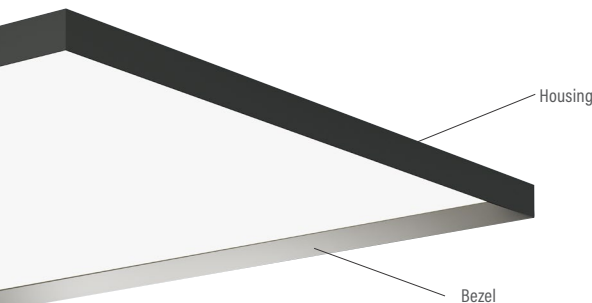**DESCRIPTION**

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

ELECTRICAL/CONTROLS

- 120-277V driver, 50/60Hz input
- 0-10V Dimming to 1%

LISTING

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

LED INFO

- **LED:** Luminus MP Series
- **SDCM:** 3-step MacAdam Ellipse
- **CCT:** 2700K, 3000K or 3500K
- **CRI:** >80
- **Lumen Maintenance:** $L_{70} > 50,000$ hrs

ORDERING CODE

SERIES	BINA-P	bina pendant
TYPE	SQ	square
CCT	27K 30K 35K	2700K 3000K 3500K
SIZE	16 24 32 40	16" x 16" 24" x 24" 32" x 32" 40" x 40"
CURRENT	325 500 675 850 1050	325mA 500mA 675mA 850mA 1050mA
LIGHT OUTPUT	D DI	direct only direct/indirect
HOUSING COLOR	BK WH MC	black white matte chrome
BEZEL COLOR	BK WH MC	black white matte chrome
CANOPY COLOR	BK WH MC	black white matte chrome


ORDERING CODE

Follow the steps to specify your fixture, example:


BINA-P-SQ-27K-32-500-D-WH-BK-BK

DIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16"	830lm / 10W	1290lm / 16W	1705lm / 21W	2110lm / 25W	2575lm / 32W
24"	1210lm / 14W	1880lm / 21W	2490lm / 28W	3080lm / 35W	3750lm / 41W
32"	1750lm / 21W	2715lm / 32W	3590lm / 42W	4450lm / 52W	5410lm / 63W
40"	2420lm / 25W	3750lm / 42W	4960lm / 54W	6145lm / 67W	7470lm / 82W

INDIRECT (3000K)					
SIZE	325MA	500MA	675MA	850MA	1050MA
16" / 24"	525lm / 6W	790lm / 8W	1050lm / 10W	1300lm / 12W	1575lm / 15W
32" / 40"	860lm / 9W	1330lm / 14W	1800lm / 18W	2270lm / 23W	2900lm / 28W

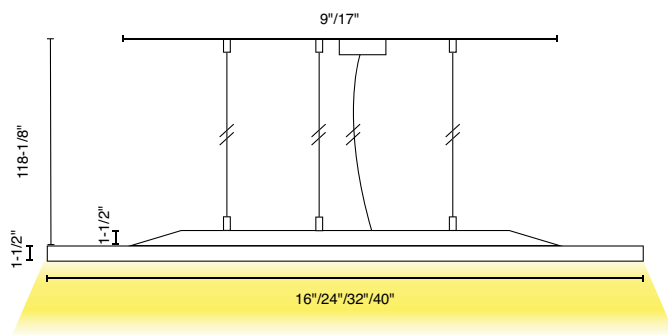

Direct

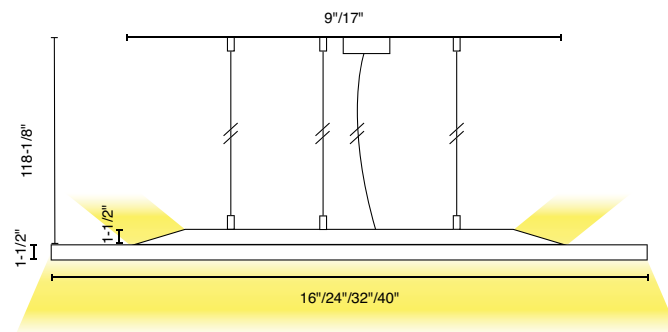

Direct/Indirect