

# bruck

## CLASSIC

### Canopy, Track SW WD E26



900 ivory



901 black



906 canary yellow



905 aluminum

\*top row shown with LLED



902 gypsy red



903 larkspur blue



Custom Finish



shown with  
Wire Guard Accessory

\*bottom row shown with LE26

#### DESCRIPTION

- Bruck's Classic spun aluminum shade crosses several design boundaries allowing for a nostalgic or even a modern look. Different light source options, mounting options and colors allow for a unique design. Classic's inspiration was the beautiful paint finishes of classic cars. The gorgeous automotive grade finish brings you back to a Chevy® showroom in 1957.

#### MOUNTING

- The pendant can be mounted from Bruck's field adjustable canopy and accepts medium base lamping options. The standard overall cable length of 10' can be field-cut or specified when ordering. See the decorative Junction Box Cover for open ceiling applications.
- Optional track mounting: Global Trac Systems, GEO track, ECO track / HALO® Power Trac track, and Zonyx track.

#### LISTING

LLED:

- CSAus listed to UL1598 and UL1574 (Suitable for damp locations)
- cCSA listed to CSA 22.2 #250.0 and #250.570

LE26:

- ULus listed to UL1598 (Suitable for dry locations)
- cUL listed to CSA 22.2 #250.0
- ETLus listed to UL1574 (Suitable for dry locations)
- cETL listed to CSA 22.2 #250.570

#### PROJECT INFORMATION

|               |  |      |  |
|---------------|--|------|--|
| JOB NAME      |  | TYPE |  |
| ORDERING CODE |  |      |  |

#### ORDERING CODE

|                     |                                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LIGHT SOURCE        | LLED<br>LE26                                                                                            | LED, 1000 lm<br>E26 socket                                                                                                                                                                                                                                                                                                                                                                                                      |
| CCT <sup>1</sup>    | 30K<br>35K<br>3018                                                                                      | 3000K standard white LED<br>3500K standard white LED<br>3000K warm dim LED, to 1800K                                                                                                                                                                                                                                                                                                                                            |
| CRI <sup>1</sup>    | 90 <sup>2</sup><br>95 <sup>3</sup>                                                                      | 90 CRI, static white<br>95 CRI, warm dim                                                                                                                                                                                                                                                                                                                                                                                        |
| SHADE COLOR         | 900<br>901<br>902<br>903<br>905<br>906<br>CLASSIC<br>RAL-XXXX                                           | ivory<br>black<br>gypsy red<br>larkspur blue<br>aluminum<br>canary yellow<br>custom finish, complete code with RAL number                                                                                                                                                                                                                                                                                                       |
| FINISH              | MC<br>BK                                                                                                | matte chrome<br>black                                                                                                                                                                                                                                                                                                                                                                                                           |
| MOUNTING<br>OPTIONS | PBK<br>PMC<br>PWH<br>ECOHBK<br>ECOHMC<br>ECOHWB<br>ECOJBK<br>ECOJWB<br>GEOBK<br>GEOHC<br>GEOHW<br>ZONMC | canopy, black with black cable<br>canopy, matte chrome with black cable<br>canopy, white with white cable<br>ECO/HALO black with black cable<br>ECO/HALO matte chrome with black cable<br>ECO/HALO white with white cable<br>JUNO black with black cable<br>JUNO white with white cable<br>GEO black with black cable<br>GEO matte chrome with black cable<br>GEO white with white cable<br>Zonyx matte chrome with black cable |
| ACCESSORIES         | 900503MC                                                                                                | wire guard, matte chrome<br>Order Accessories separately.                                                                                                                                                                                                                                                                                                                                                                       |

#### ORDERING CODE

Follow the steps to specify your fixture, example:  
LLED - 30K - 90 - 900 - BK - ECOHBK


#### NOTES

1. CCT and CRI options for LLED only.
2. 90 CRI for static white only.
3. 95 CRI for warm dimming only.

#### CCT AT LIGHT LEVEL (%LF) FOR WARM DIM LED

| %LF  | CCT  |
|------|------|
| 100% | 3000 |
| 50%  | 2800 |
| 25%  | 2300 |
| 10%  | 1900 |
| 5%   | 1800 |

## MOUNTING OPTIONS

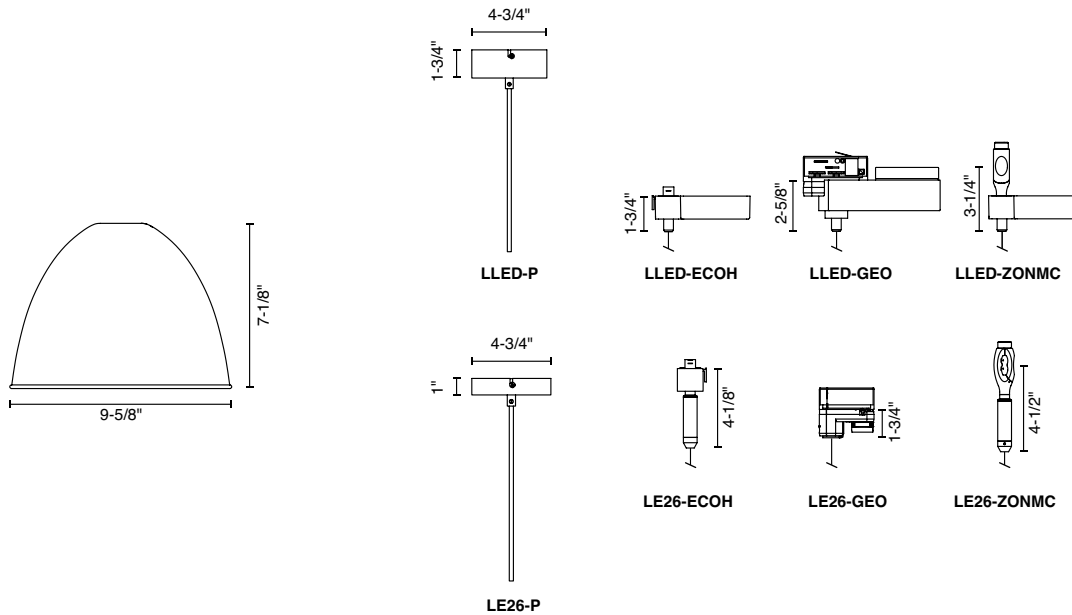

## LIGHT SOURCE

| Light Source           | LLED - Static White LED                                                                                                                                                                                       | LLED - Warm Dim LED                                                                                                                                                                                           | LE26 - E26 Socket                                                                                                                                                                                                |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Performance</b>     |                                                                                                                                                                                                               |                                                                                                                                                                                                               |                                                                                                                                                                                                                  |
| LED                    | Cree CMT 1420                                                                                                                                                                                                 | Luminus CDM-9                                                                                                                                                                                                 | Lamp dependent                                                                                                                                                                                                   |
| Lumens                 | 1150lm                                                                                                                                                                                                        | 850lm                                                                                                                                                                                                         |                                                                                                                                                                                                                  |
| CCT                    | 3000K or 3500K                                                                                                                                                                                                | 3000K to 1800K                                                                                                                                                                                                |                                                                                                                                                                                                                  |
| SDCM                   | 2-Step MacAdam Ellipse                                                                                                                                                                                        | 3-Step MacAdam Ellipse                                                                                                                                                                                        |                                                                                                                                                                                                                  |
| CRI                    | >90                                                                                                                                                                                                           | >95                                                                                                                                                                                                           |                                                                                                                                                                                                                  |
| Lumen Maintenance      | L <sub>90</sub> > 41,500 hours                                                                                                                                                                                | L <sub>70</sub> > 54,000 hours                                                                                                                                                                                |                                                                                                                                                                                                                  |
| <b>Technical Specs</b> |                                                                                                                                                                                                               |                                                                                                                                                                                                               |                                                                                                                                                                                                                  |
| Socket Listing         | <ul style="list-style-type: none"> <li>• Integrated LED module</li> <li>• ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)</li> <li>• cETL Listed to CSA C22.2 #250.0 and #9.0</li> </ul> | <ul style="list-style-type: none"> <li>• Integrated LED module</li> <li>• ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)</li> <li>• cETL Listed to CSA C22.2 #250.0 and #9.0</li> </ul> | <ul style="list-style-type: none"> <li>• Medium E26 base socket</li> <li>• ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only)</li> <li>• cETL Listed to CSA C22.2 #250.0 and #9.0</li> </ul>   |
| <b>Mounting</b>        |                                                                                                                                                                                                               |                                                                                                                                                                                                               |                                                                                                                                                                                                                  |
| Canopy                 | <ul style="list-style-type: none"> <li>• 120-277Vac, 50/60Hz input</li> <li>• 14.3W, 14.9VA</li> <li>• Tri-mode dimming (Triac, ELV and 0-10V)</li> <li>• Mount to 3-1/2" - 4" round J-Box</li> </ul>         | <ul style="list-style-type: none"> <li>• 120-277Vac, 50/60Hz input</li> <li>• 15.6W, 16.1VA</li> <li>• Tri-mode dimming (Triac, ELV and 0-10V)</li> <li>• Mount to 3-1/2" - 4" round J-Box</li> </ul>         | <ul style="list-style-type: none"> <li>• 120Vac input</li> <li>• 100W, 100VA (max 100W lamp)</li> <li>• Dimmable (with compatible lamp)</li> <li>• Mount to 3-1/2" - 4" round J-Box</li> </ul>                   |
| Line Voltage Track     | <ul style="list-style-type: none"> <li>• 120Vac, 50/60Hz input</li> <li>• 14.3W, 14.9VA</li> <li>• Triac and ELV phase dimming</li> <li>• Connects to line voltage adapter (ECO, GEO, Zonyx)</li> </ul>       | <ul style="list-style-type: none"> <li>• 120Vac, 50/60Hz input</li> <li>• 15.6W, 16.1VA</li> <li>• Triac and ELV phase dimming</li> <li>• Connects to line voltage adapter (ECO, GEO, Zonyx)</li> </ul>       | <ul style="list-style-type: none"> <li>• 120Vac input</li> <li>• 100W, 100VA (max 100W lamp)</li> <li>• Dimmable (with compatible lamp)</li> <li>• Connects to line voltage adapter (ECO, GEO, Zonyx)</li> </ul> |
| <b>Warranty</b>        |                                                                                                                                                                                                               |                                                                                                                                                                                                               |                                                                                                                                                                                                                  |
|                        | • 5 year limited fixture warranty                                                                                                                                                                             | • 5 year limited fixture warranty                                                                                                                                                                             | • 1 year limited fixture warranty                                                                                                                                                                                |


| PROJECT INFORMATION |  |      |  |
|---------------------|--|------|--|
| JOB NAME            |  | TYPE |  |
| ORDERING CODE       |  |      |  |

## VINTAGE LED LAMPS FOR E26 BASE SOCKETS

- Amber Glass Lamp with Thread LED
- Integrated Driver-Free System
- Suitable for Damp Locations
- Smooth Dimming System\*
- 25,000 Hours Warranty
- 95% Energy Savings

\*Compatible with most electronic low voltage (ELV) dimmers



|                                | LED Globe Lamp                                                                                                                                                               |                       | LED Edison Lamp                                                                                                                                                                      | LED Tubular Lamp                                                                                                                                                                     |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ordering Code                  | LMP-G4030022K1                                                                                                                                                               | LMP-G2518022K1        | LMP-ED2118022K1                                                                                                                                                                      | LMP-TB1030022K1                                                                                                                                                                      |
| Type                           | G40                                                                                                                                                                          | G25                   | ST21                                                                                                                                                                                 | T10                                                                                                                                                                                  |
| Base                           | E26                                                                                                                                                                          | E26                   | E26                                                                                                                                                                                  | E26                                                                                                                                                                                  |
| Delivered Lumens               | 350lm                                                                                                                                                                        | 350lm                 | 200lm                                                                                                                                                                                | 350lm                                                                                                                                                                                |
| Wattage                        | 3.5W (60W equivalent)                                                                                                                                                        | 3.5W (60W equivalent) | 2.0W (40W equivalent)                                                                                                                                                                | 3.5W (60W equivalent)                                                                                                                                                                |
| Maximum Overall Length (MOL)   | 7.0"                                                                                                                                                                         | 4.5"                  | 5.4"                                                                                                                                                                                 | 7.56"                                                                                                                                                                                |
| Maximum Overall Diameter (MOD) | 5.0"                                                                                                                                                                         | 3.15"                 | 2.45"                                                                                                                                                                                | 1.25"                                                                                                                                                                                |
| CCT                            | 2200K                                                                                                                                                                        | 2200K                 | 2200K                                                                                                                                                                                | 2200K                                                                                                                                                                                |
|                                | <br> 5" |                       | <br> 2-5/8" | <br> 1-1/8" |