

FSL-GYP

FOSSIL Trimless Steplight

Cove, Undercabinet & Millwork Lighting

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Body Construction

Constructed from plaster, this trimless fixture features an embedded light fixture and smooth reflective opening that provides clean and glare-free lighting.

Power Consumption

This fixture operates on 24V DC. (See page 2 for driver options)

Light Output

This accent light available in 2700 K, 3000 K and 3500 K color temperatures, providing up to 70 lumens.

Dimming

The LED lamp supports 100~1% dimmable functionality when used with dimmable driver.

LED Characteristics

Powered by a 2 watt LED chip that maintains uniform intensity with 70% lumens at 35,000 hours average life; with a minimum CRI of 90.

Beam Spread

The fixture lens provides a 70 degree beam spread.

Linking

Each fixture provided with 22 AWG 2-SPL wire for hardwiring to other fixtures and driver. Use wire type and gauge suitable for application to connect the fixtures.

QuickShip Made-To-Order


Made-To-Order products ship within seven business days of an order being released.

SPECIFICATION	
Beam Angle	70°
CCT	2700 K / 3000 K / 3500 K
CRI (Typical)	90+
Dimming	Yes
Dimming Tech	As per power supply
Efficacy (Lm/W)	31.5
Environment	Indoor, Damp
Input Voltage	24V DC
Projected Life	35,000 hrs
Lumen	Up to 70
Power Supply Type	Constant Voltage
Warranty	1-Year
Wattage	2W



Description

With minimalism at its core, FOSSIL is an interior step light collection that seamlessly meshes with its surroundings. Available in four unique shapes, FOSSIL is a pre-formed plaster fixture that easily-installs into a building's frame for a flawless trimless look, without the need to cut holes and reducing costs associated with intensive labor.

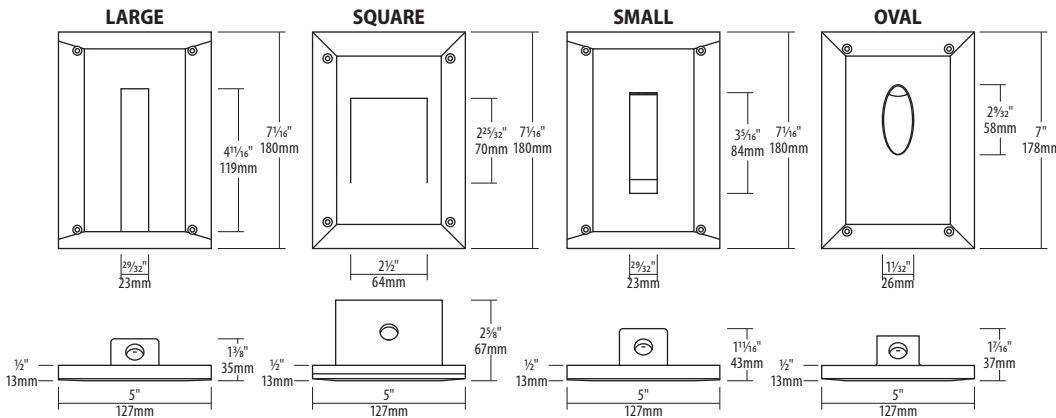

Ordering Guide

Opening Style	Color Temp.
FSL-GYP - - 2W	
L : Large	27K : 2700 K
O : OVAL	30K : 3000 K
Q : Square	35K : 3500 K
S : Small	



Highlighted option denotes QuickShip.

Notes: Accessories should be ordered separately. For additional options please consult your Liteline representative.

QuickShip option is available on orders of 100 pieces or less. QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Compatible Drivers

OnCloud

OnCloud Driver Kit

**OC-HWB-60WFSL-1C**

100-240VAC, 60W, 1-Channel 24VDC
OnCloud driver kit, powers and controls wireless dimming and on/off capability through WiZ app, Room Controller and smart speakers.

OnCloud Adapter

**LC-DVR-CV96W1FSL-1C**

24V, 1-Channel OnCloud adapter, controls dimming and on/off capability through WiZ app, Room Controller and smart speakers.

Power feed required

**LED-HWB-DC21-6-PF**

DC 2.1 to bare leads power feed.
Maximum 10' to first fixture.


* Power feed required for all drivers with DC 2.1 jack.

Non Dimming Class II

Hardwire Drivers

**LED-HWB-24V-24W**

LED 24V, 24W Hard wire Box LED Driver with DC 2.1 jack.

**LED-HWB-24V-36W**

LED 24V, 36W Hard wire Box LED Driver with DC 2.1 jack.

LED-HWB-24V-60W

LED 24V, 60W Hard wire Box LED Driver with DC 2.1 jack.

LED-HWB-24V-100W

LED 24V, 96W Hard wire Box LED Driver with DC 2.1 jack.

Power feed required

**LED-HWB-DC21-6-PF**

DC 2.1 to bare leads power feed.
Maximum 15' to first fixture.

* Power feed required for all drivers with DC 2.1 jack.

Accessories

**LED-SP-4**

Optional harness for up to 4 runs, 24V.

Dimming Class II

Electronic Hardwire Drivers – DC 2.1 – Powered by Lutron®

**LED-HWB-DC21-6-PF**

40W LED dimmable hardwire driver with DC 2.1 jack. 2-wire, 24V, powered by Lutron® Hi-lume® 1% 2-wire 120V LED driver.

**LED-HWB-DC21-6-PF**

40W LED dimmable hardwire driver with DC 2.1 jack. 3-wire, 24V, powered by Lutron® Hi-lume® 1% Ecosystem/3-wire LED driver.

Power feed required

**LED-HWB-DC21-6-PF**

DC 2.1 to bare leads power feed.
Maximum 10' to first fixture.

* Power feed required for all drivers with DC 2.1 jack.

Electronic Hardwire Drivers – Hardwire

**HWB-DIM-CDC-24V-30W**

30W dimmable electronic hardwire driver, 24V.

**HWB-DIM-CDC-24V-60W**

60W dimmable electronic hardwire driver, 24V.

**HWB-DIM-CDC-24V-96W**

96W dimmable electronic hardwire driver, 24V.

**HWB-DIM-C1-24V-100W**

100W 0-10V dimmable class 2 power supply, 24V.

Accessories

**LED-SP-4**

Optional harness for up to 4 runs, 24V.