



Low Voltage: Path Lights (L Shape)

Solid Brass – Architectural Models



Detail Specifications:

- Finish: Oil Rubbed Bronze or Matte Black
- Housing: Corrosion Resistant Solid Brass
- Lamp Type:
 - G4 Bulbs 12V (not included)
 - 35W Halogen Max
 - LED bulbs available
- IP Rating: Wet Location IP65
- Lens: Clear glass

Applications:

- Landscape
- Walkways & Pathways
- Security Lighting
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial

Product Information:

- Heat resistant glass lens
- Water tight silicone ring for waterproofing
- Stem Options: 22" Height
- Packaging: Retail color box
- Master Box Quantity: 10pcs.

Driver Options:

- Compatible with 12V Low Voltage Drivers

Mounting & Installations:

- Wire: 6' (72") SPT-1W 18 gauge wire lead
- Spike: 8.3" Non-metallic spike included
 - Optional brass spike available
- Sold brass pipe with 1/2" knuckle stem

Warranty:

- Lifetime Anti-Corrosion Warranty

Fixtures

| |
|--|
| PL-L-22-BR-ORB-12V Oil Rubbed Bronze |
| PL-L-22-BR-MBL-12V Matte Black |

1 Bulb Options


| |
|----------------------------------|
| LED-G4WP-1.5W-SW 2700K |
| LED-G4WP-1.5W-WW 3000K |
| LED-G4WP-1.5W-CW 4000K |
| LED-G4WP-2.5W-SW 2700K |
| LED-G4WP-2.5W-WW 3000K |
| LED-G4WP-2.5W-CW 4000K |
| LED-G4WP-3.5W-SW 2700K |
| LED-G4WP-3.5W-WW 3000K |
| LED-G4WP-3.5W-CW 4000K |

Optional Accessories


| Brass Stake | Surface Mount | Tree Mount | Stake Cover | Path Light Cover |
|--|---|--|---|-----------------------------------|
| STK-HD-1/2-BR Neutral Finish | SM-1/2-BR-ORB Brass Oil Rubbed Bronze | SM3-1/2-BR-ORB Brass Oil Rubbed Bronze | STKC-1/2-BR-ORB Brass Oil Rubbed Bronze | PL-AT-1/2-ALM-BZ Bronze |
| | SM-1/2-BR-MBL Brass Matte Black | SM3-1/2-BR-MBL Brass Matte Black | STKC-1/2-BR-MBL Brass Matte Black | PL-AT-1/2-ALM-BL Black |
| | SM-1/2-ALM-BZ Aluminum Bronze | | | |
| | SM-1/2-ALM-BL Aluminum Black | | | |

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

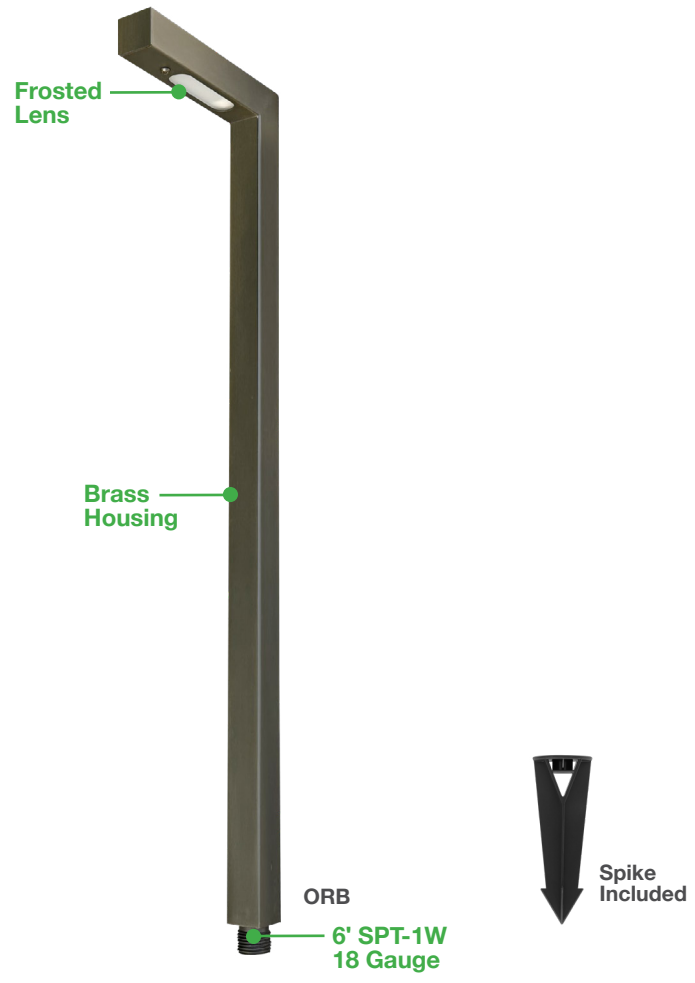

DIMENSIONS

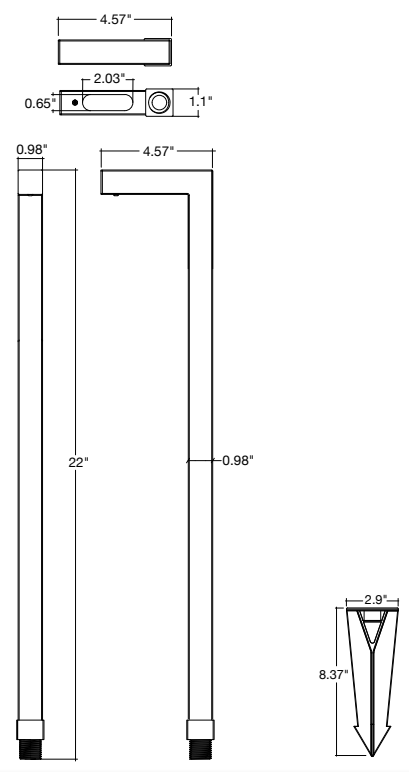



LED-G4WP-1.5W-SW
LED-G4WP-1.5W-WW
LED-G4WP-1.5W-CW



LED-G4WP-2.5W-SW
LED-G4WP-2.5W-WW
LED-G4WP-2.5W-CW



LED-G4WP-3.5W-SW
LED-G4WP-3.5W-WW
LED-G4WP-3.5W-CW



STK-HD-1/2-BR



SM-1/2-BR-ORB



SM-1/2-BR-MBL



SM-1/2-ALM-BZ




SM-1/2-ALM-BL



SM3-1/2-BR-ORB



SM3-1/2-BR-MBL



STKC-1/2-BR-ORB



STKC-1/2-BR-MBL



PL-AT-1/2-ALM-BZ



PL-AT-1/2-ALM-BL

| Model | Voltage | Color |
|------------------------|---------|-------------------|
| PL-L-22-BR-ORB-12V BRZ | 12V | Oil Rubbed Bronze |
| PL-L-22-BR-ORB-12V MBL | 12V | Matte Black |

BULBS

| Model | Voltage | Watts | Lumens | Color |
|------------------|-----------|-------|--------|-------|
| LED-G4WP-1.5W-SW | 12V AC/DC | 1.5w | 110 | 2700k |
| LED-G4WP-1.5W-WW | 12V AC/DC | 1.5w | 110 | 3000k |
| LED-G4WP-1.5W-CW | 12V AC/DC | 1.5w | 110 | 4000k |
| LED-G4WP-2.5W-SW | 12V AC/DC | 2.5w | 210 | 2700k |
| LED-G4WP-2.5W-WW | 12V AC/DC | 2.5w | 210 | 3000k |
| LED-G4WP-2.5W-CW | 12V AC/DC | 2.5w | 210 | 4000k |
| LED-G4WP-3.5W-SW | 12V AC/DC | 3.5w | 280 | 2700k |
| LED-G4WP-3.5W-WW | 12V AC/DC | 3.5w | 280 | 3000k |
| LED-G4WP-3.5W-CW | 12V AC/DC | 3.5w | 280 | 4000k |

STAKE

| Model | Voltage |
|---------------|----------------------------|
| STK-HD-1/2-BR | Brass Stake 10" Heavy Duty |

SURFACE MOUNT

| Model | Description |
|---------------|--|
| SM-1/2-BR-ORB | Brass Stake 10" Heavy Duty (Oil Rubber Bronze) |
| SM-1/2-BR-MBL | Brass 1/2" Surface Mount (Matte Black) |
| SM-1/2-ALM-BZ | Aluminum 1/2" Surface Mount (Bronze) |
| SM-1/2-ALM-BL | Aluminum 1/2" Surface Mount (Black) |

TREE MOUNT

| Model | Description |
|----------------|--|
| SM3-1/2-BR-ORB | Brass Stake 10" Heavy Duty (Oil Rubber Bronze) |
| SM3-1/2-BR-MBL | Brass 1/2" Surface Mount (Matte Black) |

STAKE COVER

| Model | Description |
|-----------------|--------------------------------------|
| STKC-1/2-BR-ORB | Brass Stake Cover(Oil Rubbed Bronze) |
| STKC-1/2-BR-MBL | Brass Stake Cover(Matte Black) |

PATH LIGHT COVER

| Model | Description |
|------------------|---------------------------|
| PL-AT-1/2-ALM-BZ | Path Light Cover (Bronze) |
| PL-AT-1/2-ALM-BL | Path Light Cover (Black) |