

# 4 Conductor Leader Cable, Cable Strain Relief Kit, & Terminator

Date: \_\_\_\_\_  
Type: \_\_\_\_\_  
Firm Name: \_\_\_\_\_  
Project: \_\_\_\_\_

For use with iW/ColorGraze Powercore, ReachElite or all Reach family luminaires, 100 to 277 VAC, 15.2 m (50 ft), UL

## LEADER CABLE

For use with iW/ColorGraze, Graze Elite, ReachElite, or Reach luminaires.

Includes Leader Cable, Cable Strain Relief Kit, & Terminator.



## Specifications

Due to continuous improvements and innovations, specifications may change without notice.


### Physical

|                        |                                                                 |
|------------------------|-----------------------------------------------------------------|
| Dimensions             | 15240 mm (600 in) Length                                        |
| Weight                 | 4.7 kg (10.4 lb)                                                |
| Connections            | Self-locking, female connector to flying leads                  |
| Cable                  | 4 conductor, Annealed flexible stranded copper, UL 62, C22.2-49 |
| Outer Cable Insulation | CPE 105° C                                                      |
| Inner Wire Insulation  | EPDM                                                            |
| Wire Gauge             | 14 AWG                                                          |
| Voltage                | 100 to 277 VAC                                                  |
| Temperature Range      | -40 to 50 °C (-40 to 122 °F) Operating                          |

### Certification and Safety

|               |                             |
|---------------|-----------------------------|
| Environment   | Dry/Damp/Wet Location, IP66 |
| Certification | UL                          |

### Dimensions

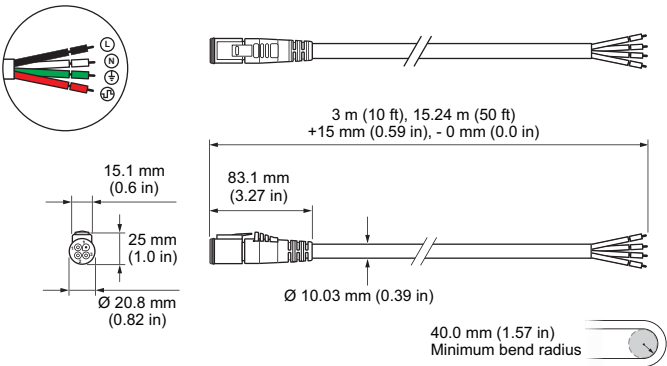

### Part Numbers

#### Leader Cable

4 Conductor Leader Cable, Cable Strain Relief Kit, & Terminator  
For use with iW/ColorGraze Powercore, ReachElite or all Reach family luminaires, 100 to 277 VAC, 15.2 m (50 ft), UL  
ZCS459 C15250P BK UL

Use Item Number when ordering in North America.

| Item Number   | Item 12NC    |
|---------------|--------------|
| 108-000055-00 | 910503703137 |