



Features

- 3 drive current options available – 700mA, 1050mA, 1200mA, with UL Class 2 output
- 0-10V dimming
- Compact housing


Benefits

- Flexibility of design via multiple drive currents and low voltage
- Helps to maximize energy savings and allows application specific light levels
- Enables design of low profile and compact fixtures

Dimensions

	in.	mm
Case Length	5.47	138.9
Case Width	1.81	46.0
Case Height	1.11	28.2
Mounting Length	5.67	144.0
Mounting Width	1.08	27.4
Overall Length	5.93	148.25

Wire Diagram

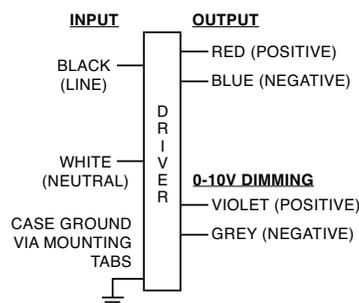

Dimming	Dimming Range	Minimum Output Current (A)	Other Comments
0-10V Analog Class 2 Wiring	10% ~ 100%	0.105	Dimming source current: 150 μ A

Product Data

Input and output use lead-wires.

Lead-wires are 18AWG 105C/600V solid copper per UL1452.

Lead Length outside enclosure: 270 mm (\pm 30mm) on all wires.

Input Voltage (Vac)	Output Power (W)	Output Voltage Range (V)	Output Current (A)	Efficiency@ Max Load and 70°C Case	Max Case Temp. (°C)	Input Current (Arms)	Max. Input Power (W)	Inrush Current (Apk/ 50%- μ s)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection Common/ Diff (KV)	Weight (Lbs/ kgs)	Envir. Protection Rating
120	44	14 - 42	1.05	85	80°C	0.46	56	25 / 100	<8%	>0.95	4/4	1.0/ 0.45	UL damp and dry
277				88		0.21		65 / 100	<12%				



Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Ordering Information	
Order code	XI040C105V042CNJ1
Full product code	XI040C105V042CNJ1M (Mid-Pack, 12pcs/Box)
Full product name	XITANIUM 40W 1.05A 0-10V INT-J
Input Information	
Line Voltage	120-277Vac_rms
Line Current	0.46A @ 120V, 0.21A @ 277V
Line Frequency	50/60Hz
Min. Mains voltage operational	108 V [min]
Max. Mains voltage operational	305V [max]
THD (total)	Refer to graph
Power Factor (PF)	Refer to graph
Inrush Current	Per NEMA 410
Lightning Surge Protection	Refer to table below
Output Information	
Output voltage range	14V to 42Vdc
Maximum open circuit voltage	44V
Output Current Ripple (ripple = peak to average / average)	10% max @ max lout Low frequency (≤ 120 Hz) content <5%
Protections	Short Circuit and Open Circuit Protection for LED + and LED-
Ambient Temp Range	-40°C to +55°C
Max Case Temperature (Tcase)	80°C
Features	
Interfaces	0-10V Dimming
AOC (Adjustable Output Current)	N/A
MTP (Module Temperature Protection)	N/A
0-10V Dimming Specifications	150 μ A source current from driver, See dim curve for detail.
Environment & Approbation	
Environmental Protection Rating	UL damp and dry
Agency Approbations	UL8750, UL1310, UL935, CSA-C22.2 No. 250.13-12, CSA C22.2 No. 223
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Isolation	Refer to table
Audible noise	<24dB Class A

Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve:

Dimming source current from the driver: 150µA (@ 0<Vdim<8V)

LED Current Tolerance at 1050mA ≤ 5% over temperature and component variations and ≤ 10% at any dim level.


Minimum Dim Level: 10% of Iout (minimum 105mA)

Maximum output voltage on the dimming wires: 13V

Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Advance	Sunrise - SRI200ZTUNV

For compatibility with other dimmers please contact the dimmer manufacturer.

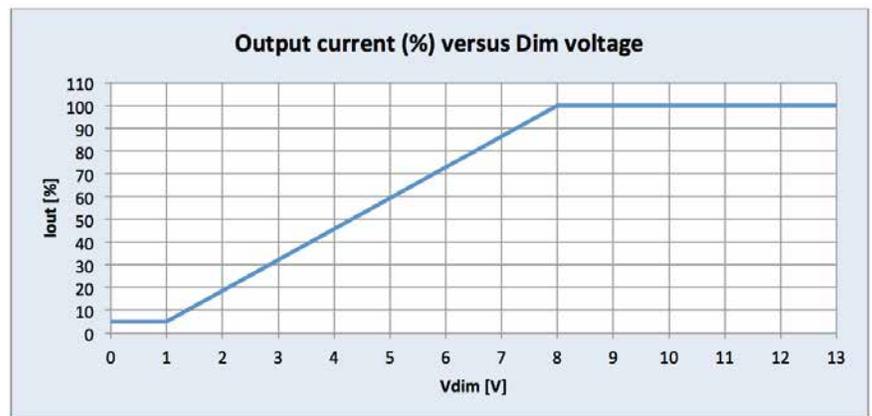


Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J


Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Iout vs. Tcase of Driver:

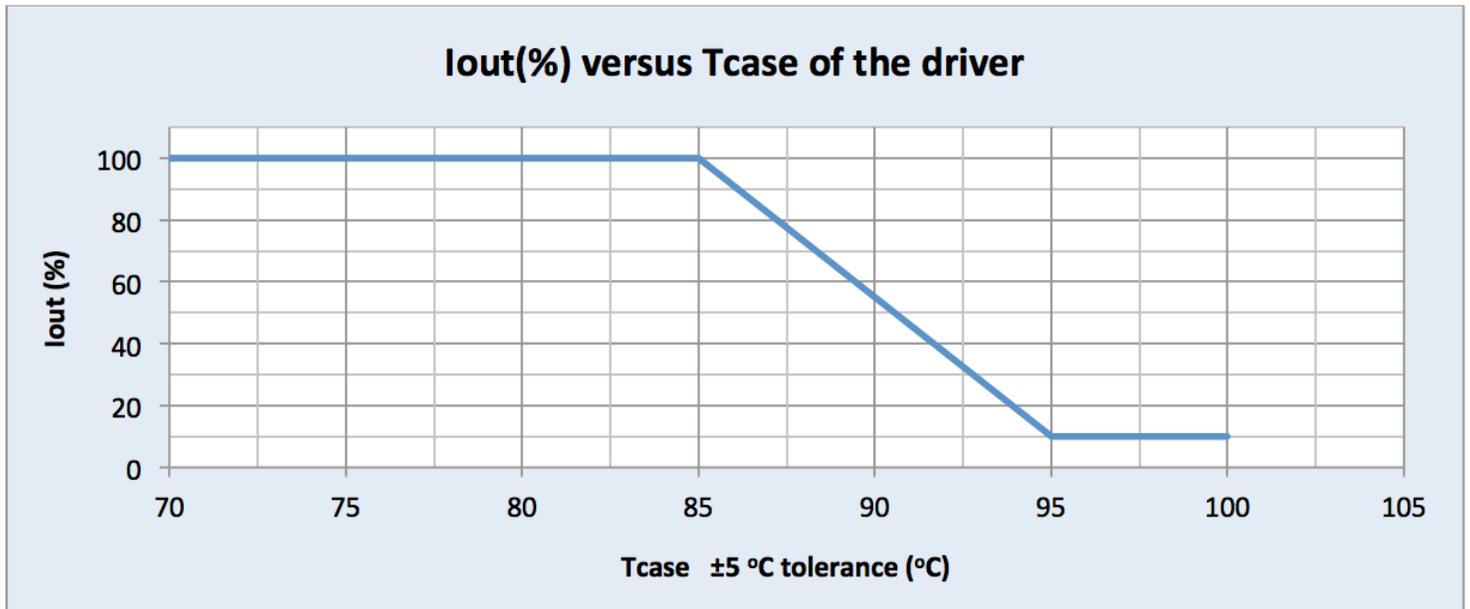

Lifetime vs. Tcase of Driver:

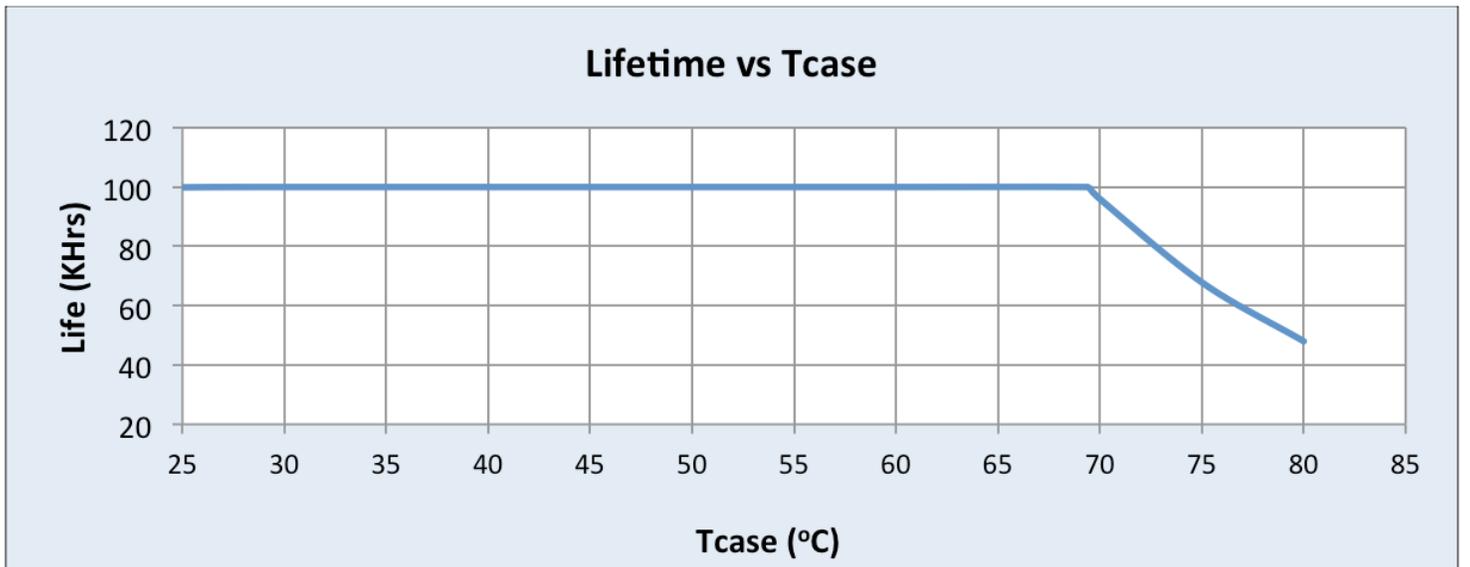


Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Inrush Current Info:

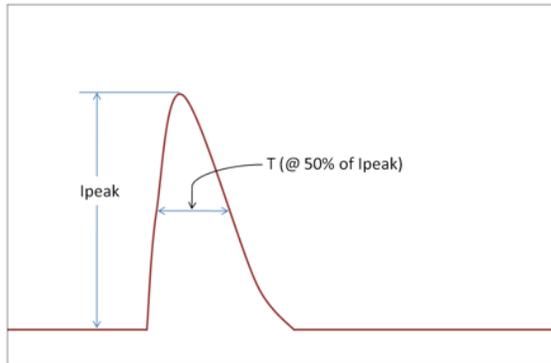

Vin	Ipeak	T (@ 50% of Ipeak)
120 Vrms	25 A	100 μ s
277 Vrms	65 A	100 μ s

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

Lightning Surge Info:


ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
100 kHz Ring Wave (w/t 30 Ω)	6kV	6kV
1.2/50 μ s - 8/20 μ s Combination Wave (w/t 2 Ω)	4kV	4kV

Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J

Mechanical Specifications

Mechanical Drawing:

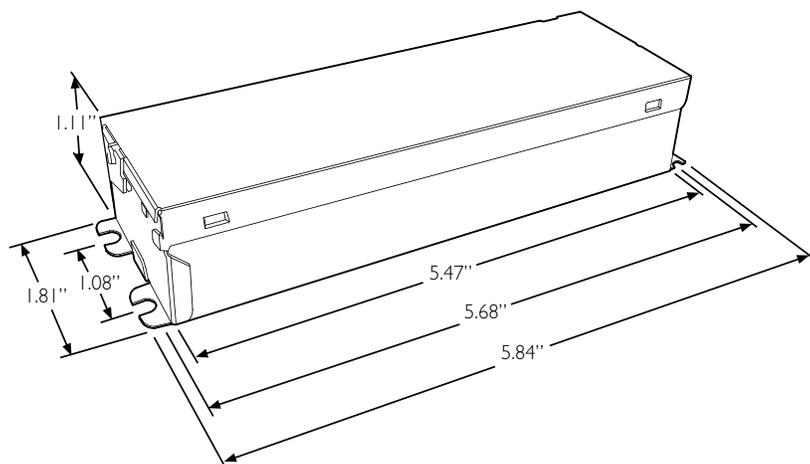

J-CAN



Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J

Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments.

The graphs are meant to be a guideline and not a specification.

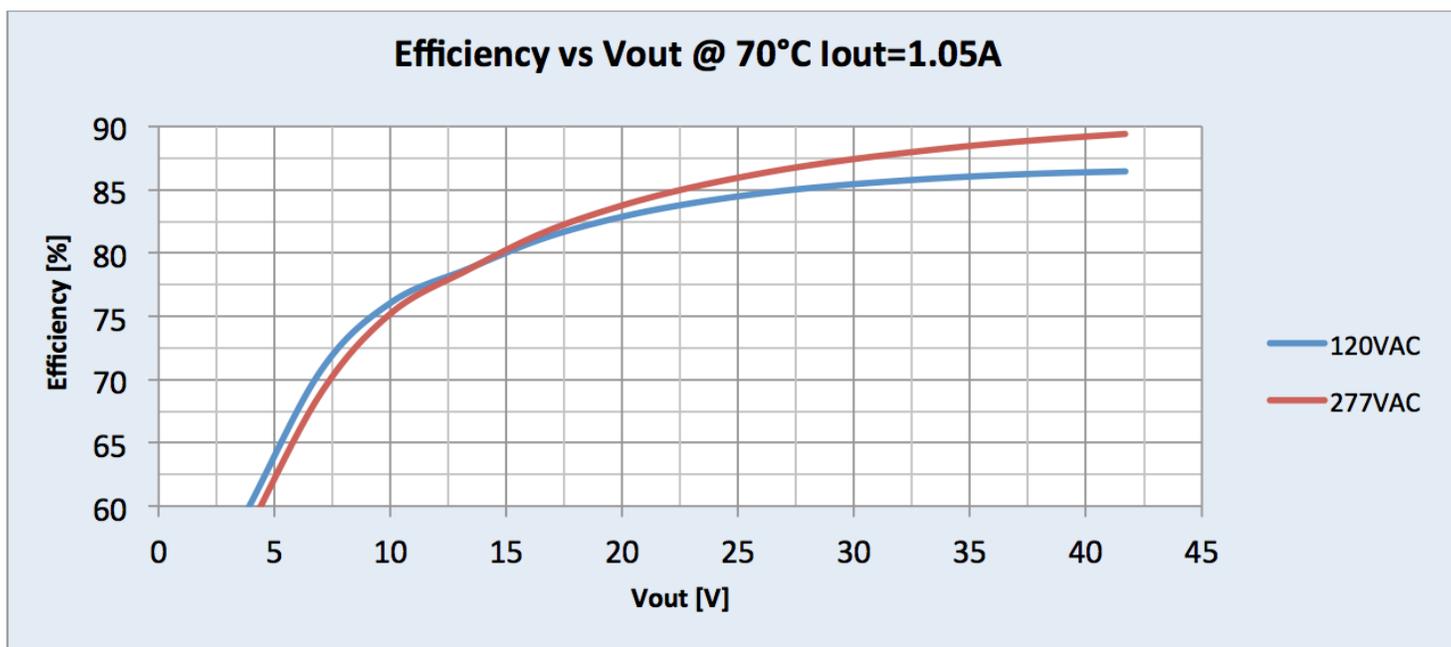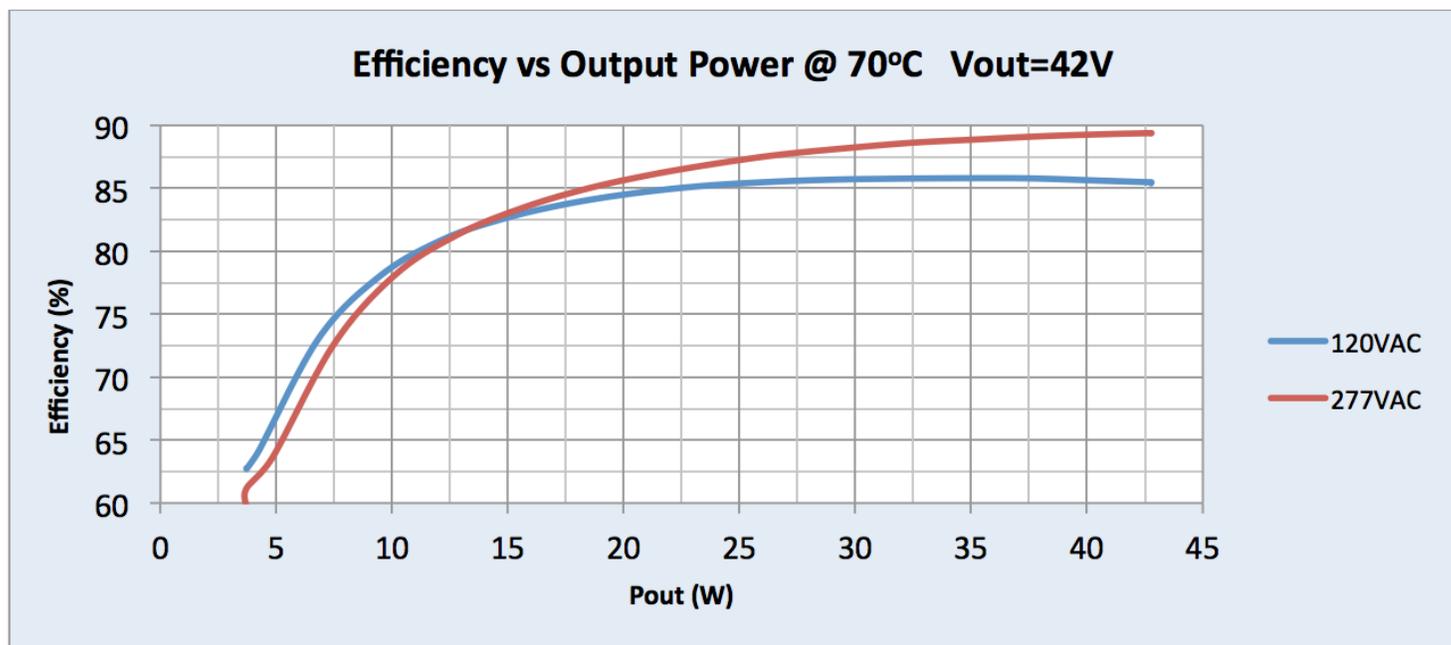


Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor vs Output Power @ 70°C

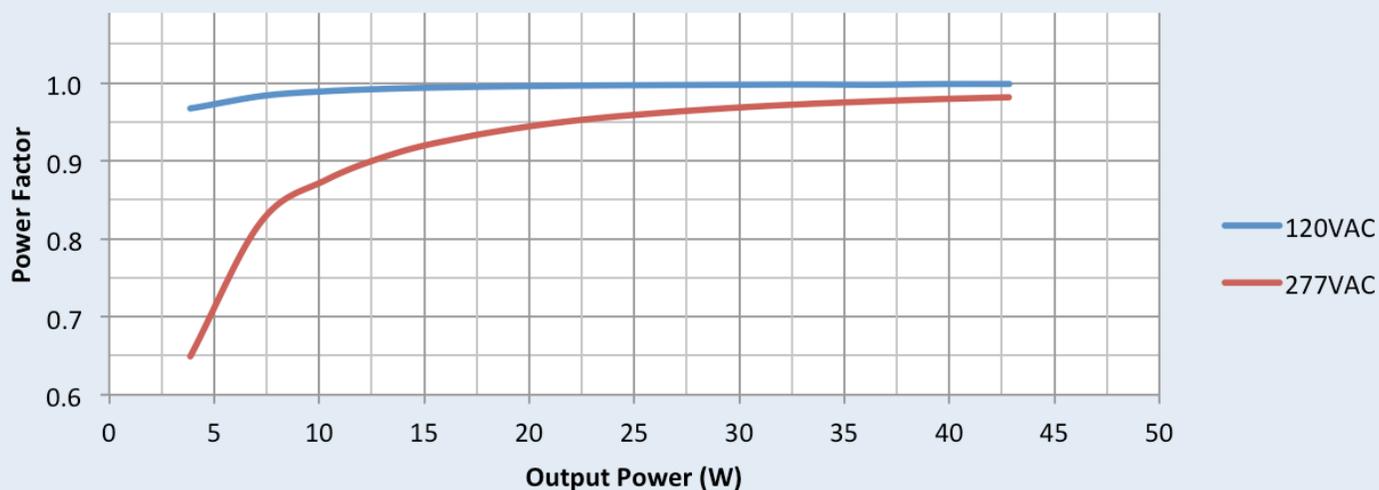

THD vs Output Power @ 70°C

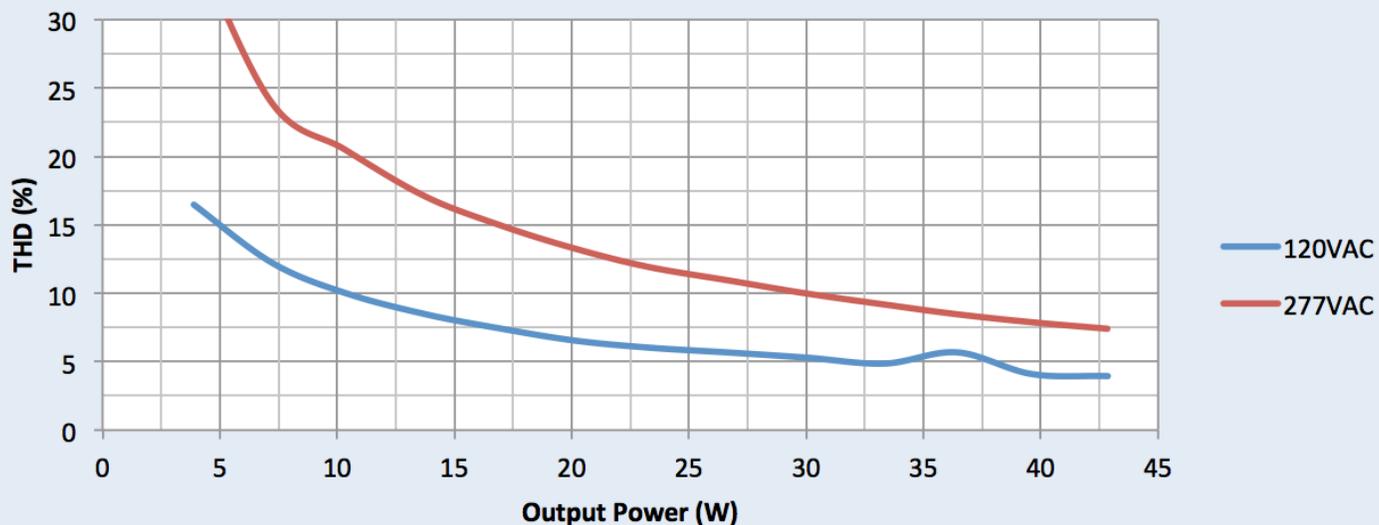

Xitanium XI040C105V042CNJ1

40W 1.05A 0-10V INT-J

Application Notes

Isolation:

Isolation	Input	Output	0-10V (Class 2)	Enclosure
Input	Not applicable	2xU+1KV	2.5KVac	2xU+1KV
Output	2xU+1KV	Not applicable	Not applicable	500V
0-10V (Class 2)	2.5KVac	Not applicable	Not applicable	500V
Enclosure	2xU+1KV	500V	500V	Not applicable

UL Conditions of Acceptability:

Please contact your sales representative for a copy of the latest UL Conditions Of Acceptability (COA).

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

