

Project:



# Thin-Line LED Pendant Spec Sheet

SKU: 2816.16-6

A system of minimally scaled LED linear pendants, [uplight/downlight wall bars](#), and [indirect light wall bars](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line Pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or up-light, providing direct or indirect illumination. The driver for this fixture must be installed in a remote location. If you would like the look of a smaller canopy than our standard, our [Optional Mini Box Canopy](#) is also available for the Thin-Line LED Pendant.

Learn more: <https://sonnemanlight.com/thin-line-led-pendant>

Type #:

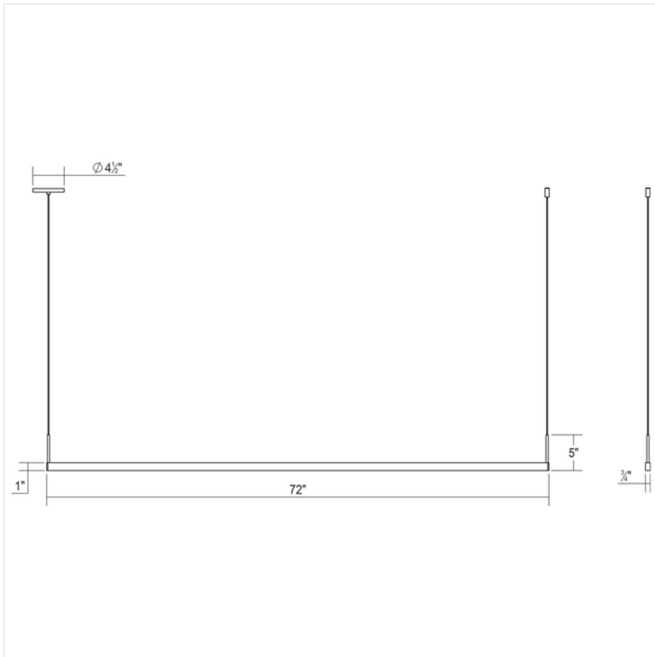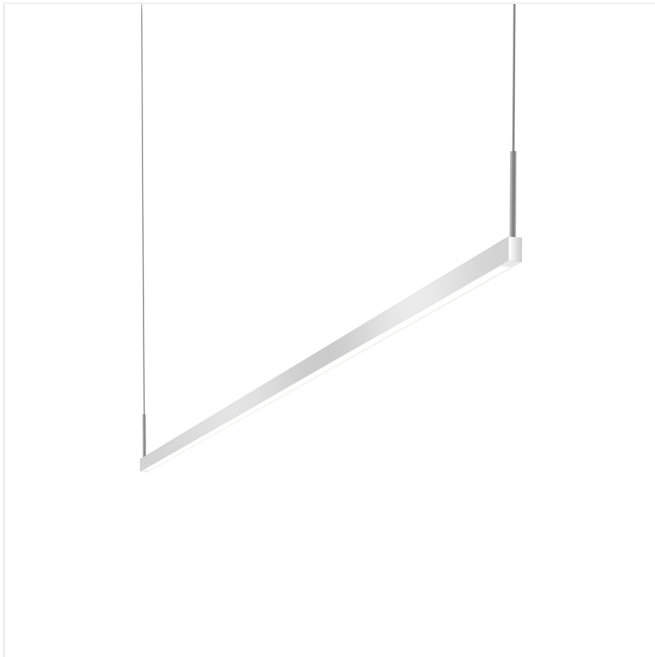

## Dimensions

|                               |                    |
|-------------------------------|--------------------|
| Height:                       | 5"                 |
| Width:                        | 72"                |
| Length:                       | 0.75"              |
| Canopy/Backplate/Base:        | 4.5"               |
| Hanging Details:              | 6' Adjustable Cord |
| Size:                         | 6' One-Sided       |
| Canopy/Backplate/Base Height: | 0.5"               |

## Electrical Specs

|                        |              |
|------------------------|--------------|
| Bulb(s) Included?:     | Yes          |
| Bulb 1 Type:           | Integral LED |
| Bulb Quantity:         | 1            |
| Input Voltage:         | 120VAC       |
| Wattage:               | 36           |
| Initial Lumens:        | 2220         |
| Delivered Lumens:      | 1350         |
| Color Temperature:     | 3000K        |
| CRI:                   | 90           |
| Power Supply Type:     | Driver       |
| Power Supply Quantity: | 1            |
| Power Supply Location: | Remote       |
| Dimming Type:          | TRIAC/ELV    |
| Bulb Max Wattage:      | 36           |

## Installation

|                             |                               |
|-----------------------------|-------------------------------|
| Installation:               | Licensed electrician required |
| Sloped Ceiling Compatible?: | Compatible                    |
| Minimum Hanging Height:     | 5.75"                         |
| Maximum Hanging Height:     | 73.75"                        |

## Shipping

|                        |               |
|------------------------|---------------|
| Carton 1 L x W x H:    | 75" X 7" X 4" |
| Carton 1 Gross Weight: | 6 LBS         |

## Shade

|                 |                            |
|-----------------|----------------------------|
| Shade Material: | Aluminum w/Optical Acrylic |
|-----------------|----------------------------|

## General Listings

|                    |                             |
|--------------------|-----------------------------|
| Features:          | Damp Rated                  |
| Certification:     | C-ETL-US                    |
| Color/Finish:      | Bright Satin Aluminum (.16) |
| Dark Sky Friendly: | N                           |

## Available Finishes

|                     |   |
|---------------------|---|
| Available Finishes: | Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03) |
|---------------------|---|

## Available Color Temperatures

|                               |                     |
|-------------------------------|---------------------|
| Available Color Temperatures: | 2700K, 3000k, 3500k |
|-------------------------------|---------------------|