

# SLIMLED™

Designed to fit in the tightest of spaces, the SLIMLED series is a low-profile recessed fixture with diffuse edge-lit LED technology.

With no housing required, suitability for use in air handling spaces and approval for wet locations, the SLIMLED is the perfect choice to install in basements, bathrooms, dining or living room perimeter and outdoor soffits.

## Styles

Round / Square / Variety of colors

## Lumens

Up to 910

## Sizes

4" / 6"

## Additional Features

Airtight

Wet-location Rated

IC Rated

Lifetime Warranty

## CCT (5%)

2700 K / 3000 K / 3500 K  
/ 4000 K / Dim-to-warm

## CRI (Minimum)

90

## IDEAL FOR



New Construction




Remodelling



Insulated Ceilings



## Color Options



Black



Brushed Nickel



Silver



White



Liteline Corporation  
Copyright © 2017  
All rights reserved.

Telephone  
416.996.1856  
1.866.730.7704


Fax  
905.709.5255  
1.888.738.9736

[LITELINE.COM](http://LITELINE.COM)

REV 11.22.17

# SLIMLED<sup>TM</sup>DTW

Recessed Light - Dim to Warm

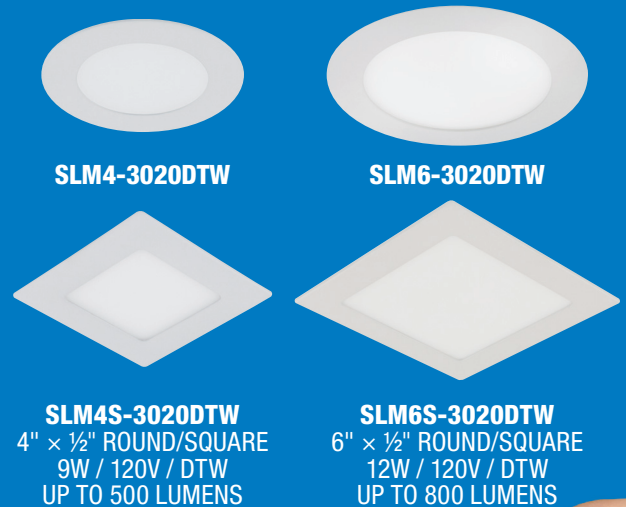

## Dim to Warm LED Fixtures

*The next piece of the LED Lighting puzzle*

Today's LEDs can be used in virtually any lighting application with greatly improved colour quality and warm CCTs at high CRI levels. When fixtures are being used on a dimmer, as the light level drops, today's LEDs maintain the same colour temperature that they exhibit at full power. Incandescent and halogen lamps dim to a warmer CCT at lower levels.

Dim-to-warm technology is now available in LED lighting fixtures they can deliver 3000°K CCT light at full power yet smoothly reduce the CCT to the 2000°K range at the lowest dimming light levels. This technology was designed to mimic the incandescent and halogen lamps that dim to a warmer colour temperature using the same low-cost triac dimmers.

### Features

- LED technology fits anywhere you need general light source
- No Recessed fixture required
- Slim 1/2" thickness design
- Ideal for drop ceilings
- I.C. rated for direct contact with insulation
- Easy to install yourself
- Perfect solution where joists or duct work would normally prevent recessed installation
- Lifetime Warranty
- Damp location rated for soffit applications
- Dim to warm, 3000°K ~ 2000°K
- Integrated LED fixtures



Dimmable



Indoor



3000°K~2000°K  
Colour Temp



Damp  
Location



120°  
Beam Angle



IC Rated



For more information on Lifetime Warranty program, please visit [www.liteline.com/goldlabel](http://www.liteline.com/goldlabel)



LITELINE CORPORATION | [www.liteline.com](http://www.liteline.com)  
P 416-996-1856 | 1-866-730-7704  
F 905-709-5255 | 1-888-738-9736

## Ordering Guide



| Part #                                      | Description                                                                             | UPC          | Case Qty. | Master Qty. |
|---------------------------------------------|-----------------------------------------------------------------------------------------|--------------|-----------|-------------|
| <b>SlimLED™ Dim to Warm Kits</b>            |                                                                                         |              |           |             |
| <b>4" Round Kit, 9W, Up to 500 Lumens</b>   |                                                                                         |              |           |             |
| SLM4-3020DTW-BK                             | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K~2000°K, black                    | 771250108593 | 12        | 48          |
| SLM4-3020DTW-BN                             | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K~2000°K, brushed nickel           | 771250108609 | 12        | 48          |
| SLM4-3020DTW-WH                             | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K~2000°K, white                    | 771250108616 | 12        | 48          |
| <b>4" Square Kit, 9W, Up to 500 Lumens</b>  |                                                                                         |              |           |             |
| SLM4S-3020DTW-BK                            | 4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K~2000°K, black                   | 771250108708 | 12        | 48          |
| SLM4S-3020DTW-BN                            | 4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K~2000°K, brushed nickel          | 771250108715 | 12        | 48          |
| SLM4S-3020DTW-WH                            | 4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K~2000°K, white                   | 771250108722 | 12        | 48          |
| <b>6" Round Kit, 12W, Up to 800 Lumens</b>  |                                                                                         |              |           |             |
| SLM6-3020DTW-BK                             | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K~2000°K, black                   | 771250108739 | 12        | 24          |
| SLM6-3020DTW-BN                             | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K~2000°K, brushed nickel          | 771250108746 | 12        | 24          |
| SLM6-3020DTW-WH                             | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K~2000°K, white                   | 771250108753 | 12        | 24          |
| <b>6" Square Kit, 12W, Up to 800 Lumens</b> |                                                                                         |              |           |             |
| SLM6S-3020DTW-BK                            | 6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K~2000°K, black                  | 771250108845 | 12        | 24          |
| SLM6S-3020DTW-BN                            | 6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K~2000°K, brushed nickel         | 771250108852 | 12        | 24          |
| SLM6S-3020DTW-WH                            | 6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K~2000°K, white                  | 771250108869 | 12        | 24          |
| <b>Accessories</b>                          |                                                                                         |              |           |             |
| SLM-60-FC                                   | 60" Flexible connector, for use with SlimLED series fixtures.                           | 771250976079 | 12        | 48          |
| P-4020                                      | 4" Pre-mounting plate, for use with SLM4 series.                                        | 771250977397 | –         | 50          |
| P-4020S                                     | 4" Pre-mounting plate, for use with SLM4S series.                                       | 771250977410 | –         | 50          |
| P-6020                                      | 6" Pre-mounting plate, for use with SLM6 series.                                        | 771250976093 | –         | 30          |
| P-6020S                                     | 6" Pre-mounting plate, for use with SLM6S series.                                       | 771250977403 | –         | 30          |
| P-NCMK-1                                    | New construction mounting kit, includes hanger bars, brackets and screws.               | 771250224316 | –         | 64          |
| SLM4-XLRING-WH                              | Extra large trim ring, for use with SLM4 series, plastic, white.                        | 771250195371 | 12        | 48          |
| SLM6-XLRING-WH                              | Extra large trim ring, for use with SLM6 series, plastic, white.                        | 771250195388 | 12        | 24          |
| VBE-1                                       | Vapour barrier extender for 4" & 6" fixtures. For use in new construction applications. | 771250094942 | –         | 50          |
| VBE-2                                       | Vapour barrier extender for 4" fixtures. For use in remodel applications.               | 771250971388 | –         | 50          |
| VBE-3                                       | Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.          | 771250976086 | –         | 50          |
| VBE-4                                       | Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.          | 771250190895 | –         | 50          |



# SLIMLED™

## Recessed Light


SUPER THIN LED TECHNOLOGY



**SLM4**  
4" × ½"  
9W / 120V  
Up to 680 LUMENS



**SLM6**  
6" × ½"  
12W / 120V  
Up to 840 LUMENS

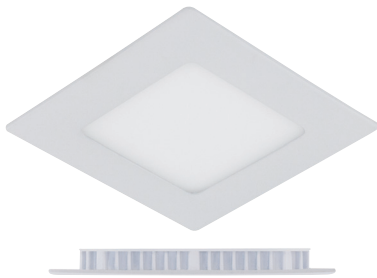


**SLM4S**  
4" Square × ½"  
9W / 120V  
Up to 610 LUMENS



**SLM6S**  
6" Square × ½"  
12W / 120V  
Up to 820 LUMENS

The SLIMLED is a high performance, easy to install down light. No recessed housing required. One-half inch thick, it fits almost anywhere. With its slim design, it's the perfect lighting solution when you have joists or duct work in the way. In addition, with 120 degree beam spread, you no longer need to worry about dark shadows on the wall making this fixture a great solution for corridors and low ceiling applications. Airtight, rated for direct contact with insulation, this fixture is the perfect choice for most lighting applications, soffits, drop ceilings, all general lighting applications. Comes with three "Quick connect" push-in terminals for fast and easy wiring, dimmable driver is included.

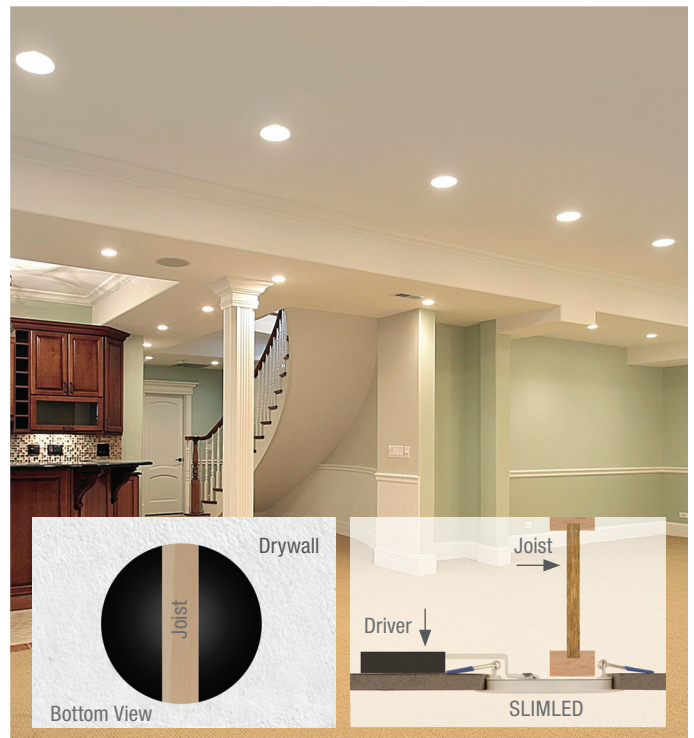

Dimmable



Damp Location



120° Beam Angle




Colour Rendering Index



2700°K / 3000°K / 3500°K / 4000°K Colour Temperature

### Colour Options




Black



Brushed Nickel



Silver



White






For more information on Lifetime Warranty program, please visit [www.liteline.com/goldlabel](http://www.liteline.com/goldlabel)



**LITELINE CORPORATION** | [www.liteline.com](http://www.liteline.com)  
P 416-996-1856 | 1-866-730-7704  
F 905-709-5255 | 1-888-738-9736

# Ordering Guide

| Part #                               | Description                                                              | UPC          | Case Qty. | Master Qty. |
|--------------------------------------|--------------------------------------------------------------------------|--------------|-----------|-------------|
| <b>SlimLED™ Kits</b>                 |                                                                          |              |           |             |
| <b>4" Round Kit, 9W, 500 Lumens</b>  |                                                                          |              |           |             |
| SLM4-27-WH                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, white.           | 771250035721 | 12        | 48          |
| SLM4-30-WH                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, white.           | 771250975348 | 12        | 48          |
| SLM4-35-WH                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, white.           | 771250191427 | 12        | 48          |
| SLM4-40-WH                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, white.           | 771250975355 | 12        | 48          |
| SLM4-27-BN                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, brushed nickel.  | 771250035738 | 12        | 48          |
| SLM4-30-BN                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, brushed nickel.  | 771250975362 | 12        | 48          |
| SLM4-35-BN                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, brushed nickel.  | 771250191403 | 12        | 48          |
| SLM4-40-BN                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, brushed nickel.  | 771250975379 | 12        | 48          |
| SLM4-27-BK                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, black.           | 771250035745 | 12        | 48          |
| SLM4-30-BK                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, black.           | 771250977519 | 12        | 48          |
| SLM4-35-BK                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, black.           | 771250191397 | 12        | 48          |
| SLM4-40-BK                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, black.           | 771250977526 | 12        | 48          |
| SLM4-27-SL                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 2700°K, silver.          | 771250191373 | 12        | 48          |
| SLM4-30-SL                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3000°K, silver.          | 771250191380 | 12        | 48          |
| SLM4-35-SL                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 3500°K, silver.          | 771250191410 | 12        | 48          |
| SLM4-40-SL                           | 4" SlimLED fixture and driver, Round, 9W, 120V, 4000°K, silver.          | 771250191434 | 12        | 48          |
| <b>4" Square Kit, 9W, 500 Lumens</b> |                                                                          |              |           |             |
| SLM4S-30-WH                          | 4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, white.          | 771250977533 | 12        | 48          |
| SLM4S-40-WH                          | 4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, white.          | 771250977540 | 12        | 48          |
| SLM4S-30-BN                          | 4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, brushed nickel. | 771250977557 | 12        | 48          |
| SLM4S-40-BN                          | 4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, brushed nickel. | 771250977564 | 12        | 48          |
| SLM4S-30-BK                          | 4" SlimLED fixture and driver, Square, 9W, 120V, 3000°K, black.          | 771250010254 | 12        | 48          |
| SLM4S-40-BK                          | 4" SlimLED fixture and driver, Square, 9W, 120V, 4000°K, black.          | 771250010261 | 12        | 48          |
| <b>6" Round Kit, 12W, 700 Lumens</b> |                                                                          |              |           |             |
| SLM6-27-WH                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, white.          | 771250191472 | 12        | 24          |
| SLM6-30-WH                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, white.          | 771250975386 | 12        | 24          |
| SLM6-35-WH                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, white.          | 771250191526 | 12        | 24          |
| SLM6-40-WH                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, white.          | 771250975393 | 12        | 24          |
| SLM6-27-BN                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, brushed nickel. | 771250191458 | 12        | 24          |
| SLM6-30-BN                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, brushed nickel. | 771250975409 | 12        | 24          |
| SLM6-35-BN                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, brushed nickel. | 771250191502 | 12        | 24          |
| SLM6-40-BN                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, brushed nickel. | 771250975416 | 12        | 24          |
| SLM6-27-BK                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, black.          | 771250191441 | 12        | 24          |
| SLM6-30-BK                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, black.          | 771250010278 | 12        | 24          |
| SLM6-35-BK                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, black.          | 771250191496 | 12        | 24          |
| SLM6-40-BK                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, black.          | 771250010285 | 12        | 24          |
| SLM6-27-SL                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 2700°K, silver.         | 771250191465 | 12        | 24          |
| SLM6-30-SL                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3000°K, silver.         | 771250191489 | 12        | 24          |
| SLM6-35-SL                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 3500°K, silver.         | 771250191519 | 12        | 24          |
| SLM6-40-SL                           | 6" SlimLED fixture and driver, Round, 12W, 120V, 4000°K, silver.         | 771250191533 | 12        | 24          |



| Part #                                          | Description                                                                             | UPC          | Case Qty. | Master Qty. |
|-------------------------------------------------|-----------------------------------------------------------------------------------------|--------------|-----------|-------------|
| <b>6" Square Kit, 12W, 700 Lumens</b>           |                                                                                         |              |           |             |
| SLM6S-30-WH                                     | 6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, white.                        | 771250977571 | 12        | 24          |
| SLM6S-40-WH                                     | 6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, white.                        | 771250977588 | 12        | 24          |
| SLM6S-30-BN                                     | 6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, brushed nickel.               | 771250977595 | 12        | 24          |
| SLM6S-40-BN                                     | 6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, brushed nickel.               | 771250977601 | 12        | 24          |
| SLM6S-30-BK                                     | 6" SlimLED fixture and driver, Square, 12W, 120V, 3000°K, black.                        | 771250010315 | 12        | 24          |
| SLM6S-40-BK                                     | 6" SlimLED fixture and driver, Square, 12W, 120V, 4000°K, black.                        | 771250010322 | 12        | 24          |
| <b>SlimLED™ (Sold Separately)</b>               |                                                                                         |              |           |             |
| <b>4" Round (Fixture only), 9W, 500 Lumens</b>  |                                                                                         |              |           |             |
| SLM4F-9W27K-WH                                  | 4" Round SlimLED (fixture only), 9W, 2700°K, white. Requires SLM-DVR-9W.                | 771250111586 | 12        | 48          |
| SLM4F-9W30K-WH                                  | 4" Round SlimLED (fixture only), 9W, 3000°K, white. Requires SLM-DVR-9W.                | 771250975997 | 12        | 48          |
| SLM4F-9W40K-WH                                  | 4" Round SlimLED (fixture only), 9W, 4000°K, white. Requires SLM-DVR-9W.                | 771250976000 | 12        | 48          |
| SLM4F-9W27K-BN                                  | 4" Round SlimLED (fixture only), 9W, 2700°K, brushed nickel. Requires SLM-DVR-9W.       | 771250111579 | 12        | 48          |
| SLM4F-9W30K-BN                                  | 4" Round SlimLED (fixture only), 9W, 3000°K, brushed nickel. Requires SLM-DVR-9W.       | 771250976017 | 12        | 48          |
| SLM4F-9W40K-BN                                  | 4" Round SlimLED (fixture only), 9W, 4000°K, brushed nickel. Requires SLM-DVR-9W.       | 771250976024 | 12        | 48          |
| SLM4F-9W27K-BK                                  | 4" Round SlimLED (fixture only), 9W, 2700°K, black. Requires SLM-DVR-9W.                | 771250111562 | 12        | 48          |
| SLM4F-9W30K-BK                                  | 4" Round SlimLED (fixture only), 9W, 3000°K, black. Requires SLM-DVR-9W.                | 771250010230 | 12        | 48          |
| SLM4F-9W40K-BK                                  | 4" Round SlimLED (fixture only), 9W, 4000°K, black. Requires SLM-DVR-9W.                | 771250010247 | 12        | 48          |
| <b>9W Drivers only</b>                          |                                                                                         |              |           |             |
| SLM-DVR-9W                                      | 9W LED driver, or use with 4" SlimLED series.                                           | 771250975973 | 12        | 48          |
| <b>6" Round (Fixture only), 12W, 700 Lumens</b> |                                                                                         |              |           |             |
| SLM6F-12W30K-WH                                 | 6" Round SlimLED (fixture only), 12W, 3000°K, white. Requires SLM-DVR-12W.              | 771250976031 | 12        | 24          |
| SLM6F-12W40K-WH                                 | 6" Round SlimLED (fixture only), 12W, 4000°K, white. Requires SLM-DVR-12W.              | 771250976048 | 12        | 24          |
| SLM6F-12W30K-BN                                 | 6" Round SlimLED (fixture only), 12W, 3000°K, brushed nickel. Requires SLM-DVR-12W.     | 771250976055 | 12        | 24          |
| SLM6F-12W40K-BN                                 | 6" Round SlimLED (fixture only), 12W, 4000°K, brushed nickel. Requires SLM-DVR-12W.     | 771250976062 | 12        | 24          |
| SLM6F-12W30K-BK                                 | 6" Round SlimLED (fixture only), 12W, 3000°K, black. Requires SLM-DVR-12W.              | 771250010292 | 12        | 24          |
| SLM6F-12W40K-BK                                 | 6" Round SlimLED (fixture only), 12W, 4000°K, black. Requires SLM-DVR-12W.              | 771250010308 | 12        | 24          |
| <b>12W Drivers only</b>                         |                                                                                         |              |           |             |
| SLM-DVR-12W                                     | 12W LED driver, for use with 6" SlimLED series.                                         | 771250975980 | 12        | 48          |
| <b>Accessories*</b>                             |                                                                                         |              |           |             |
| SLM-60-FC                                       | 60" Flexible connector, for use with SlimLED fixtures.                                  | 771250976079 | 12        | 48          |
| P-4020                                          | 4" Pre-mounting plate, for use with SLM4 series.                                        | 771250977397 | —         | 50          |
| P-4020S                                         | 4" Pre-mounting plate, for use with SLM4S series.                                       | 771250977410 | —         | 50          |
| P-6020                                          | 6" Pre-mounting plate, for use with SLM6 series.                                        | 771250976093 | —         | 30          |
| P-6020S                                         | 6" Pre-mounting plate, for use with SLM6S series.                                       | 771250977403 | —         | 30          |
| P-NCMK-1                                        | New construction mounting bracket, includes hanger bars, brackets and screws.           | 771250224316 |           | 64          |
| SLM4-XLRING-WH                                  | Extra large trim ring, for use with SLM4 series, plastic, white.                        | 771250195371 | 12        | 48          |
| SLM6-XLRING-WH                                  | Extra large trim ring, for use with SLM6 series, plastic, white.                        | 771250195388 | 12        | 24          |
| VBE-1                                           | Vapour barrier extender for 4" & 6" fixtures. For use in new construction applications. | 771250904942 | —         | 50          |
| VBE-2                                           | Vapour barrier extender for 4" fixtures. For use in remodel applications.               | 771250971388 | —         | 50          |
| VBE-3                                           | Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.          | 771250976086 | —         | 50          |
| VBE-4                                           | Vapour barrier extender for 4" & 6" fixtures. For use in remodel applications.          | 771250190895 | —         | 50          |

\* Not included in Lifetime Warranty program