


LED SPOTLIGHT-CANLESS MINI PANEL - BAFFLED TRIM HIGH OUTPUT 3", 4", 6"



5 CCT SWITCH ON DRIVER

**CRI
80**

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



DIMMABLE


TRIAC

**IC
RATED**

**WET
LOCATION
RATED**

**5
YEAR
WARRANTY**

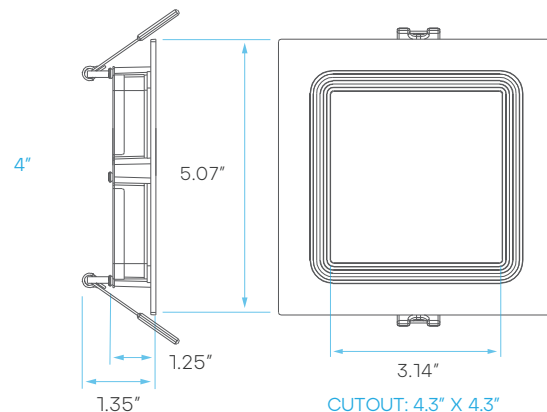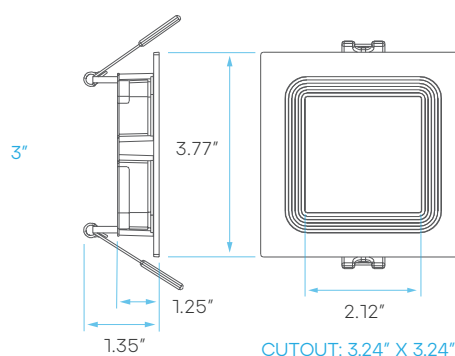

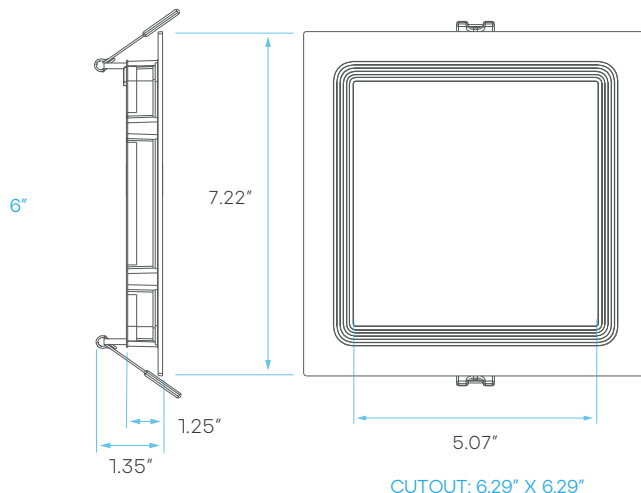

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
3"	LR23738	LED/MINI3/PANEL/5CCT/SQ/B/HO	8	120V	70	50,000	\$ 0.96
4"	LR23739	LED/MINI4/PANEL/5CCT/SQ/B/HO	12	120V	70	50,000	\$ 1.44
6"	LR23740	LED/MINI6/PANEL/5CCT/SQ/B/HO	15	120V	75	50,000	\$ 1.80

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	ETL	PLATE (KNOCKOUT)
LR23738	LED/MINI3/PANEL/5CCT/SQ/B/HO	2700K/3000K/3500K/4000K/5000K	CCT SELECT	540	80	110°	YES	NOT COMPATIBLE
LR23739	LED/MINI4/PANEL/5CCT/SQ/B/HO	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	110°	YES	LR41005 (#1)
LR23740	LED/MINI6/PANEL/5CCT/SQ/B/HO	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1400	80	110°	YES	LR41005 (#2)

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver



LR41005
New Construction
Mounting Plate



KNOCKOUTS

KNOCKOUT SIZE

#0	2.75"x2.75" (70 mm)
#1	4.25"x4.25" (108 mm)
#2	6.29"x6.29" (160 mm)