
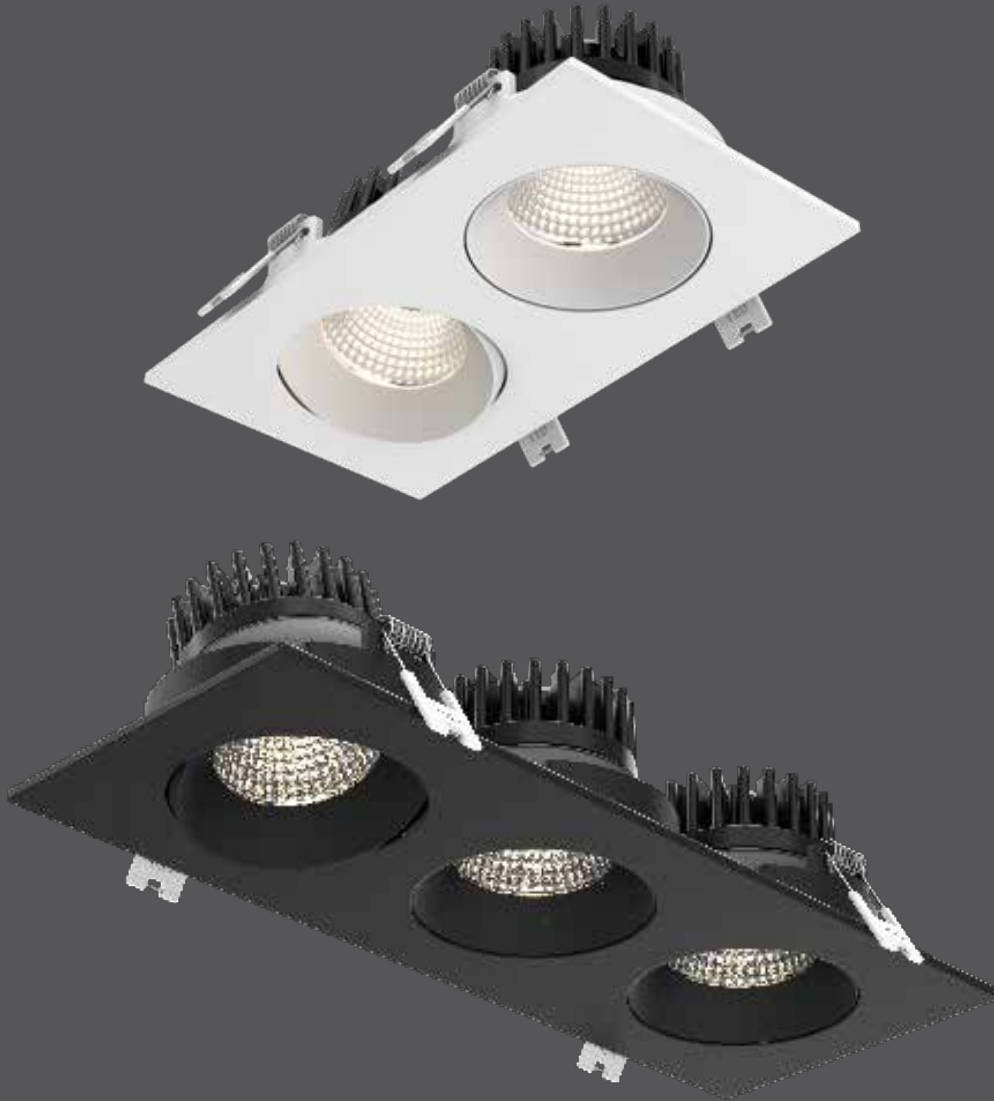


Revolve multi

Our Recessed family has grown with a new range of adjustable downlights. The effortless design and high functionality of these fixtures are sure to make a welcome addition in any room.

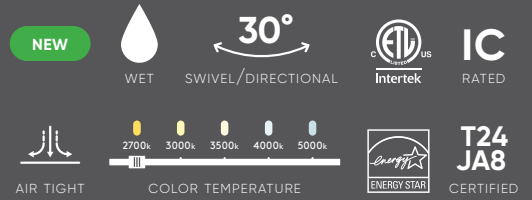

Model	Size	Watts	Delivered lumens	CRI	Color °T	Standard voltage	Multi-voltage ⚡
GBR35-CC-DUO	2x 3.5"	24 W	1740 lm	90	2700, 3000, 3500, 4000, 5000 K	120V, Triac dimming	MV: 120 / 277 / 347V, 0-10V dimming
GBR35-CC-TRIO	3x 3.5"	36 W	3010 lm				

Specifications

Includes a junction box with integrated dimmable driver
 Can be daisy chained
 Superior LED performance and lifespan
 30° tilting, 360° rotation
 Aluminum construction
 Switch-selectable CCT: 2700K/3000 K/3500 K/4000 K/5000 K
 40° beam spread
 IC certification (suitable for direct contact with insulation)
 Air-tight certified as per ASTM E283-04
 Suitable for wet locations
 Refer to website for dimmer compatibility
 Ideal operating temperature: -20° to 40° C
 5-year warranty

Finish

- **BK** Black
- **WH** White

Accessories

RFP-DUO

Rough-in plate

RFP-TRIO

Rough-in plate

REC-CC-EXT8FT

8-foot extension cable

REC-CC-EXT20FT

20-foot extension cable


Multi-voltage ⚡

This product family offers multi-voltage drivers (120/277/347) that are dimmable using 0-10V dimming systems. Please note that longer lead times may apply for this option. Kindly reach out to your DALI representative for additional information and to confirm availability.

Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

GBR35-CC-DUO 7-1/8" x 3-1/2" 

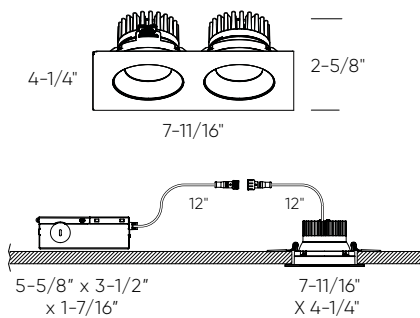

GBR35-CC-TRIO 10-1/2" x 3-1/2" 

