


## Mechanical Time Switch - 24-Hour Mechanical Time Switch, 125 VAC, 60Hz, SPDT, Indoor Metal Enclosure, 15 Minute Interval

Item T1905

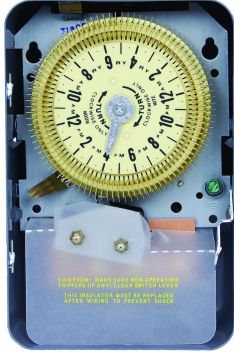

### PRODUCT DESCRIPTION

This series of mechanical time switches offers more flexible scheduling capabilities by offering 15-minute intervals. These units also come with trippers that slide in or out easily for fast and accurate settings. All units can control up to 20 A of electrical load and have a single pole, double throw switch.

### FEATURES

- ▶ Provides up to 96 operations (48 ON/48 OFF) every 24 hours
- ▶ Models with skipper wheel allow for operations to be omitted on selected days of the week
- ▶ 15-minute intervals
- ▶ Captive trippers slide in and out of dial for fast, accurate setting

### APPLICATIONS

- ▶ Timing/Scheduling ON/OFF
- ▶ Indoor Lighting Control

### TECHNICAL DATA

#### General

Model Number	T1905
Description	24-Hour Mechanical Time Switch, 125 VAC, 60Hz, SPDT, Indoor Metal Enclosure, 15 Minute Interval
UPC Code	078275191013
Brand	Intermatic
Country of Origin (Intermatic)	MEXICO
Warranty Period	1-Year limited

#### Control Specifications

Minimum ON/OFF Times	15 min
Maximum ON/OFF Operations	48
Skipper Wheel	Not Included
Operation Mode	24 hour
Has Manual Override	Yes

#### Mechanical Specifications

Enclosure Type	Indoor type 1 metal
Number of Trippers Included	96

#### Dimensions

Product Dimensions (H x W x D) in	7.875 x 5.125 x 3.437
Wire Size Min	#14 AWG
Wire Size Max	#12 AWG

#### Material Specifications

Color	Gray
-------	------

**Load Ratings**

Resistive Load Ratings Ranges	20 A, 125-480 VAC, 60 Hz
Motor Load Ratings Ranges	1/2 HP, 125 VAC, 60 Hz; 1 HP, 250 VAC, 60 Hz

**Electrical Specifications**

Wiring Option	Terminals
Input Voltage Range(s)	125 VAC, 60 Hz
Number of Circuits	1
Switch Type	SPDT
Maximum Power Consumption (W)	3 W

**Packaging**

Shipping Weight (lbs)	2.744
Unit Carton Dimensions (H x W x L) in	8.25 x 3.5 x 5.5 in

**Environmental Specifications**

Temperature (operation)	-40 °F to 130 °F / (-40 °C to 54 °C)
-------------------------	--------------------------------------

**Standards and Certifications**


CSA Certification	cCSAus
Other Certifications and Compatibilities	Green Energy
CSA File Number	C22.2-177; LR3730
California Proposition 65	Lead
RoHS Certification	X

**ACCESSORIES**



**156T1950A**  
Set of 12 Trippers for T1900, T2000, C8800, R8800 and T8800 Series

**156T1950AD12**  
12 Bags of 156T1950A Trippers for T1900, T2000, C8800, R8800, and T8800 Series



**22T338GR**  
Mounting Bracket for Intermatic Standardized Timer Mechanisms



**124T2058**  
Insulator for T1905, T1906, T2006, T2005, C8815, C8825, C8835, C8845, C8855, C8865, C8866



**124T905**  
Insulator for T1905HDM, T1975EHD, T1975HD, T1976, T1975, T1975ER, T1905



**124T907A**  
Insulator Assembly (S001)



**133T701A**  
Replacement Snap Switch for T1900 and T2000 Series



**WG730-14D**  
125 VAC, 60 Hz Motor for R8800, T1900, T1970, and T8800 Series



**WG730-14DMX**  
125 VAC, 60 Hz Motor for R8800, T1900, T1970, and T8800 Series



**WG733-14D**  
208-277 VAC, 60 Hz Motor for R8800, T1900, T1970, and T8800 Series



**WG733-14DMX**  
208-277 VAC, 60 Hz Motor for R8800, T1900, Skipper Screws (3 per package) T1970, and T8800 Series



**156T1957A**  
Package Accessory Trippers



**WG736-14D**  
480 V, 60 Hz Motor for T1900, T8800, R8800 Series