



## DALS LIGHTING

**Canada**  
80, de la Seigneurie blvd., E.  
Blainville, Quebec J7C 4N1



**U.S.A.**  
4383, NW 124<sup>th</sup> Ave.,  
Coral Springs, Florida 33065

877.430.1818  
info@dals.com  
**dals.com**

**MODEL**  
**NAME**

**CFLEDSQ06-CC**  
**DELTA SERIES**  
6" Square Flush Mount

Our LED flush mounts incorporate edge-lit technology, eliminating hot spots and glare. Can be installed indoors or out and includes five switch-selectable CCT settings.

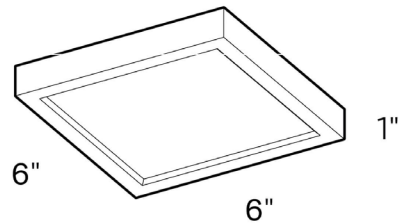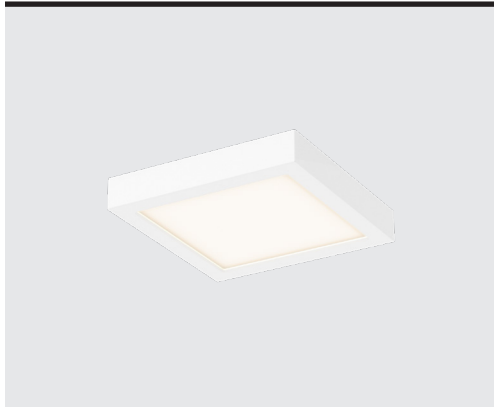


### QUICK SPECS

| SIZE | WATTS | DELIVERED LUMENS* | COLOR °T<br>5CCT                          | CRI | VOLTAGE | BEAM<br>ANGLE | LIGHT<br>DIRECTION | FINISH                                                                                                      |
|------|-------|-------------------|-------------------------------------------|-----|---------|---------------|--------------------|-------------------------------------------------------------------------------------------------------------|
| 6"   | 11W   | 700lm             | 2700K<br>3000K<br>3500K<br>4000K<br>5000K | 90  | 120V    | 110°          | Straight           | <input type="radio"/> White<br><input checked="" type="radio"/> Black<br><input type="radio"/> Satin nickel |

\*Lumen output measured at 3000K

### LIGHT DISTRIBUTION



### CONSTRUCTION

**Lens**  
Frosted

**Lens material**  
PC

**Finish type**  
Paint (BK, WH)  
Electroplate (SN)

**Housing material**  
Cast aluminum

**Type of LED**  
Edge lit SMD

**Mounting**  
Twist bracket

### RATINGS

**Placement**  
Indoor/outdoor

**Location**  
Wet (Covered ceiling  
mounted only)

**Lifespan**  
50,000 hrs.

**Certifications**  
ETL, JA8, FCC, ES

**IP rating**  
IP44

**Operating  
temperature**  
-20° to 40° C

### WHAT'S IN THE BOX

LED flush mount fixture  
Mounting bracket  
Mounting hardware  
Wire nuts  
Instruction sheet

### ACCESSORIES

-

### ADAPTERS

-

**ELECTRICAL  
DETAILS****Input voltage**  
108-120V**Output current**  
87mA**Power factor**  
90%**Driver type**  
Constant current**Output voltage**  
126V**LED model #**  
2835**THD harmonic  
distortion**  
<30%**Binning type**  
3 SDCM**FEATURES**Integrated dimmable  
driverSmooth 360° wide  
spreadSwitch-selectable CCT:  
2700K/ 3000 K/ 3500 K/  
4000 K/ 5000 KSuperior LED  
performance and  
lifespan

Minimal heat emission

Edge-lit technology

**WARRANTY**DALs offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALs customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).**RECOMMENDED DIMMER LIST\***

| BRAND     | MODEL #               | DIMMER SPECS                       | GRADE      | DIMMING RANGE (%) |     | MAX<br>LOAD |
|-----------|-----------------------|------------------------------------|------------|-------------------|-----|-------------|
|           |                       |                                    |            | MIN               | MAX |             |
| Lutron    | DVCL-153PR-WH-C       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0                 | 100 | 14          |
| Lutron    | CTCL-153PDH-WH-C      | Triac, 150 W Dimmable CFL/LED      | Compatible | 0                 | 100 | 14          |
| Lutron    | STCL-153PH-WH-C       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0                 | 100 | 14          |
| Lutron    | DVWCL-153PH-WHC       | Triac, 150 W Dimmable CFL/LED      | Compatible | 0                 | 100 | 14          |
| Lutron    | MACL-153MRHW-WHC      | Triac, 150 W Dimmable CFL/LED      | Compatible | 0                 | 100 | 14          |
| Lutron    | DVELV-300P-WH         | 300W electronic low voltage dimmer | Compatible | 0                 | 100 | 27          |
| Lutron    | MA-PRO-WH             | ELV, 250W LED/CFL                  | Compatible | 0                 | 100 | 23          |
| Lutron    | Caseta PD-6WCL-WH-R-C | Triac, 150W Dimmable CFL/LED       | Compatible | 0                 | 100 | 14          |
| Lutron    | Caseta PD-5NE-WH-C    | ELV, LED—up to 250 W               | Compatible | 0                 | 100 | 23          |
| Lutron    | Caseta PD-10NXD-WH    | Triac, LED—up to 250 W             | Compatible | 0                 | 100 | 23          |
| Leviton   | 6672-1LW              | Triac, 150W Dimmable CFL/LED       | Compatible | 1                 | 100 | 14          |
| Leviton   | DSM10                 | Triac, 450W Dimmable CFL/LED       | Compatible | 1                 | 100 | 41          |
| Leviton   | IPL06-10Z             | Triac, 150 W Dimmable CFL/LED      | Compatible | 4                 | 100 | 14          |
| Leviton   | DSL06-752             | Triac, 150 W Dimmable CFL/LED      | Compatible | 3                 | 100 | 14          |
| Leviton   | D26HD-742-1RW         | Triac, 300W LED/CFL                | Compatible | 0                 | 100 | 27          |
| Legrand   | RHCL453PNICCV4        | Triac, 450W Dimmable CFL/LED       | Compatible | 0                 | 100 | 41          |
| Legrand   | ADTP703TUM4           | Triac, 450W Dimmable CFL/LED       | Compatible | 0                 | 100 | 41          |
| Legrand   | ADPD453LM2            | Triac, 450W Dimmable CFL/LED       | Compatible | 7                 | 100 | 41          |
| Legrand   | RHL373PW              | Triac, 250W LED                    | Compatible | 0                 | 100 | 23          |
| Control 4 | C4-APD120-WH          | ELV, 120W LED                      | Compatible | 0                 | 100 | 11          |
| Control 4 | C4-FPD120-WH          | Triac, 200W LED                    | Compatible | 0                 | 100 | 18          |

\* Minimal buzzing noise may occur with some dimmers