


LED ARCHITECTURAL LINKABLE LINEAR T-GRID KIT LR42633


INSTRUCTIONS

1. Assemble the T-grid clips (A+B) to T-grid.

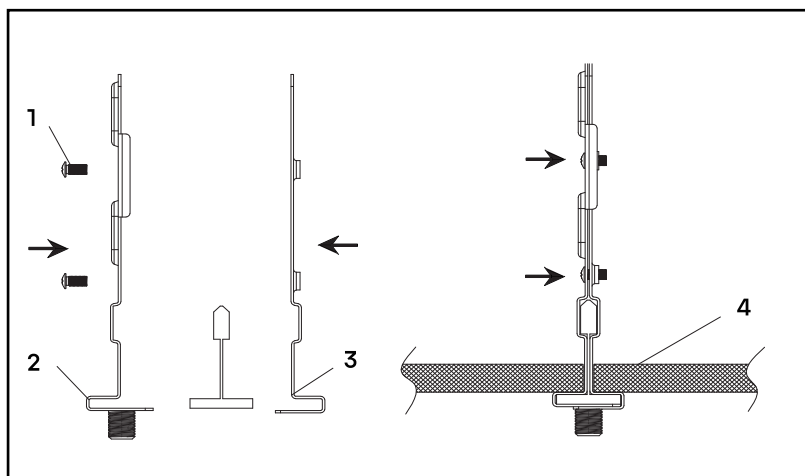

2. Attach junction box to the assembled T-grid clips (if used as power feed).


5 When unsure of the stability of the installation surface, please use a safety rope for protection. Verify the stability of the surface for safety rope before proceeding with the installation to prevent any potential fails.

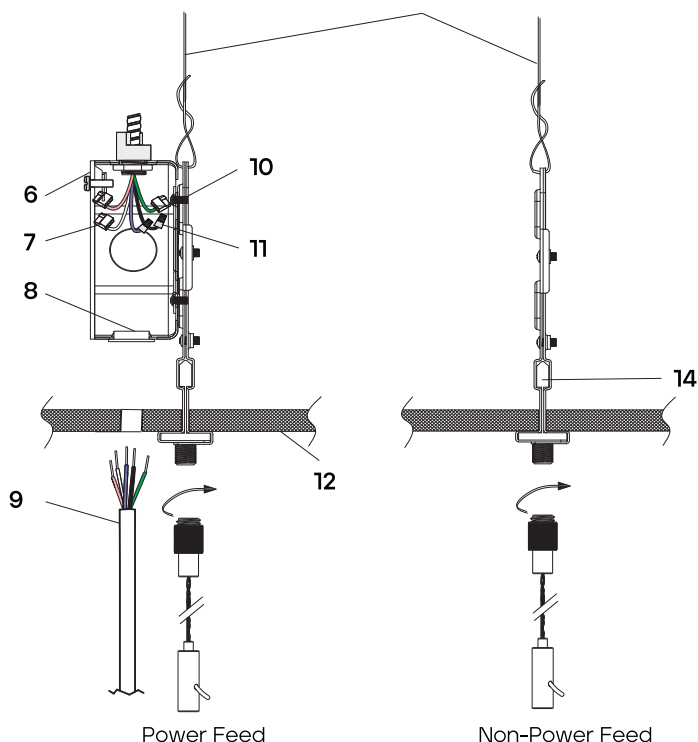

PARTS LIST

1. SCREW
2. T-GRID CLIP A
3. T-GRID CLIP B
4. CEILING TILE (NOT INCLUDED)
5. SAFETY ROPE (NOT INCLUDED)
6. 4" OCTAGON J-BOX (NOT INCLUDED)
7. WIRE NUTS
8. PLASTIC GROMMET (NOT INCLUDED)
9. POWER CORD
10. LONG SCREWS
11. WIRE NUTS
12. CEILING TILE (NOT INCLUDED)
13. ASSEMBLED T-GRID CLIPS (15/16)


BOX CONTENTS

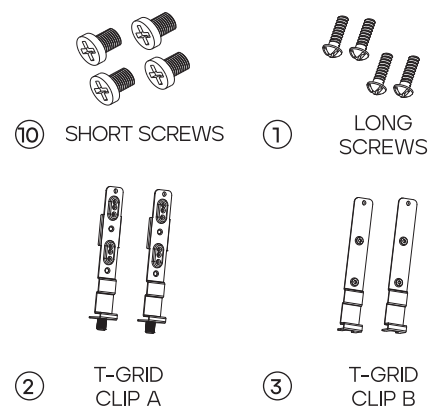


WIRING

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.
8. DO NOT USE OUTDOORS

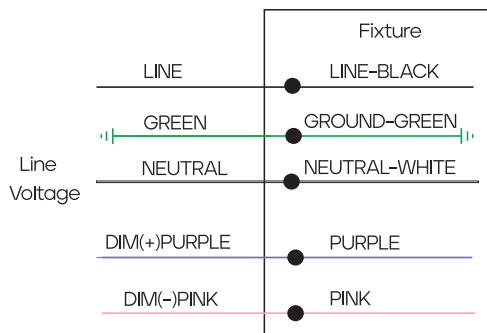

1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation

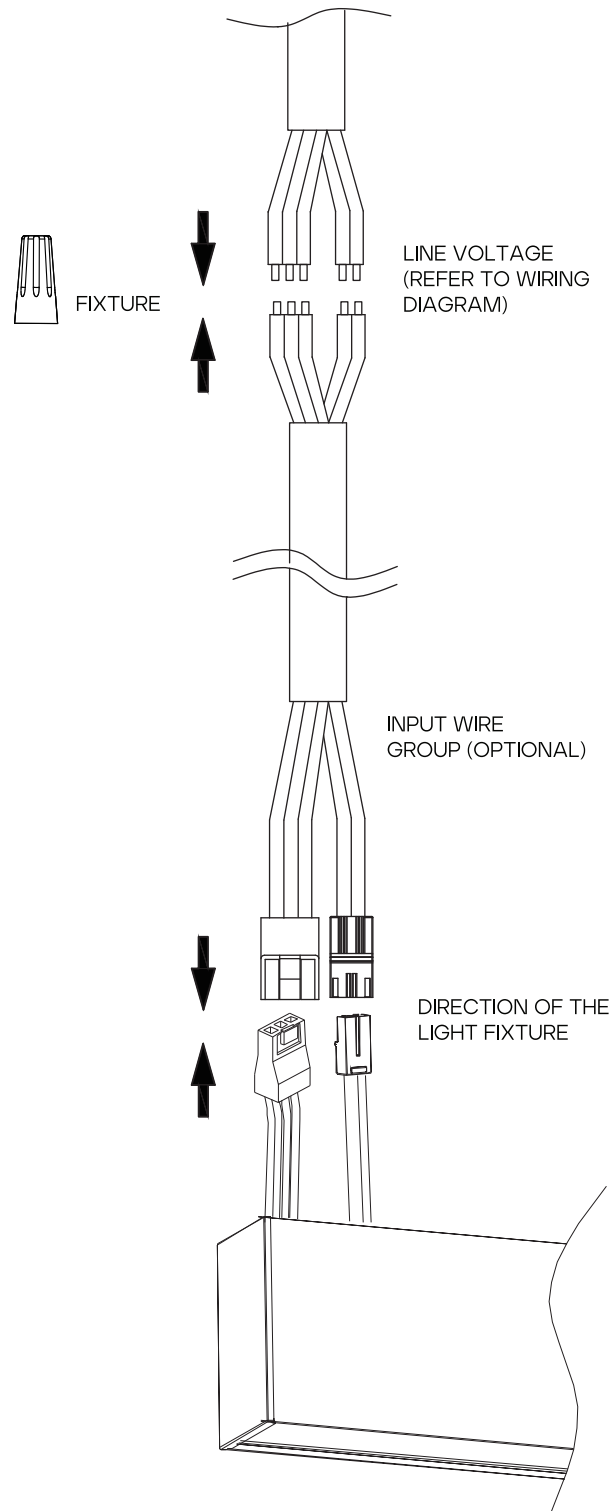

THREE TERMINALS: NEUTRAL WIRE, LIVE WIRE, GROUND WIRE.
TWO TERMINAL: DIM+ (PURPLE), DIM- (PINK)