



## A FRESH POINT OF VIEW


It's value lighting, with a fresh point of view – the Viewpoint Area Light. With its low-cost design and high energy savings, Viewpoint provides an unbeatable ROI for a wide variety of commercial and industrial applications. While its designed to be in-stock and shipped quickly, you won't lose out on configurability with a variety of lumen, optic, CCT and voltage options, as well as two mounting options with full-range adjustability. Delivering up to 162 LPW of targeted illumination, Viewpoint provides high performance distributions that fulfill most site requirements, replacing 150W-1000W HID luminaires.

## KEY FEATURES

- One Piece Diecast Aluminum Main Housing
- Factory Rotatable Type 3, 4 and 5 Optical Distributions
- High Efficacy - Up to 162 LPW
- 3 and 7 Pin Control Receptacle Options
- Optional Wireless Controls Integrated via 7 Pin Receptacle
- BLE PIR Occupancy, Photocell and Bi-Level Dimming Sensor Options
- 3G Adjustable Pole, Wall, and Slipfitter Mounting Options
- Lumen Selectable - 3 Positions per SKU
- 4000K-5000K CCT
- -40°F-104°F Ambient Temperature Range
- Calculated L70 >100,000 Hours
- 0-10V Dimmable Driver (100%-10%)
- Vented IP66 Rated Housing (Whole Luminaire)
- DesignLights Consortium® Premium Qualified Luminaire

## LUMEN SELECTABILITY MADE EASY

The Integral Selector Control makes lumen selectability easy with three different lumen packages making up nine total possible lumen outputs.

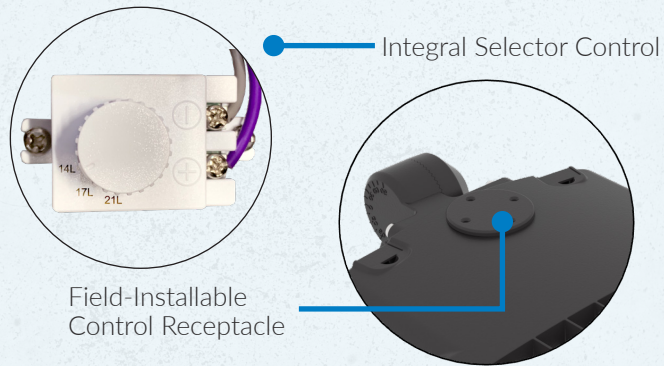

## UNBEATABLE MAX/MIN RATIO

Viewpoint provides leading uniformity with the lowest max/min ratio, outperforming similar contractor-grade products.

Distribution	Model	Avg	Max/Min
Type 3	ILP ViewPoint	1.9	9.19
	Competitor 1	2.1	13.7
	Competitor 2	2.0	37.5
	Competitor 3	2.2	43.5

## SUITABLE APPLICATIONS

Parking Lots

Car Dealerships


Public and Municipal Parks

Roadways




### ADJUSTABLE MOUNTING ACCESSORIES

Viewpoint comes standard with a fully adjustable universal round/square pole mount bracket, wall mount, or slipfitter

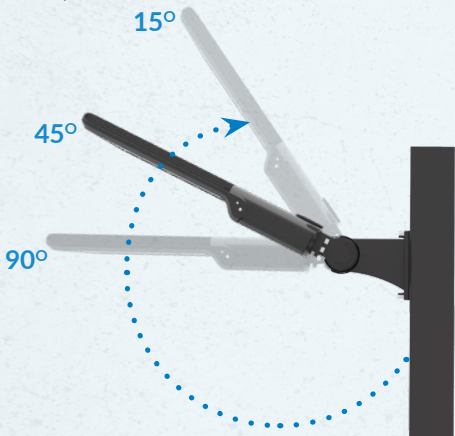


Pictured: Viewpoint Medium with UAB

**SLPF**  
2-3/8" Adjustable Slip Fitter



**WMB**  
Wall Mount Bracket




**PMB**  
Adjustable Pole Mount




### CUSTOMIZABLE, ROTATABLE OPTICS


The highly configurable, rotatable optics on Viewpoint accommodate endless designs and create high uniformity across the site.

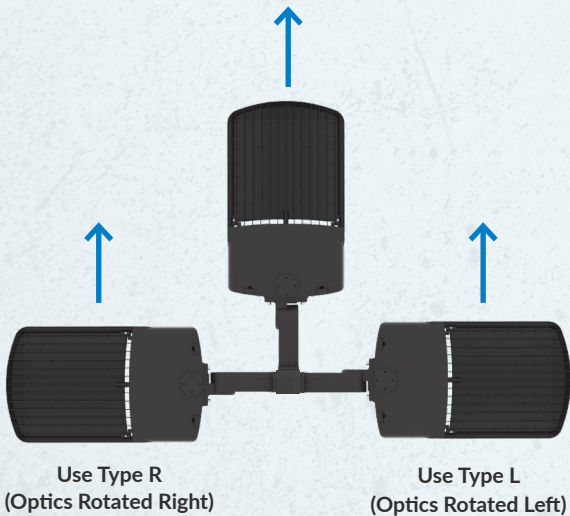


### DISTRIBUTION PATTERNS

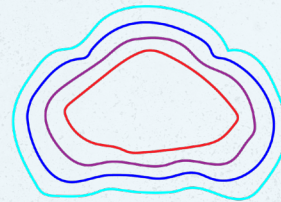

T3

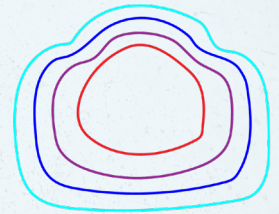

T4

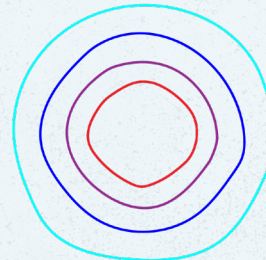

T5

### PAIR WITH VIEWPOINT FLOODS FOR A COHESIVE SITE



**VAM**  
14,000-21,000 lm

**VFM**  
10,000-14,000 lm

Viewpoint Flood Option	Lumen Range
VFC	2,000 Lumens
VFS	5,000-7,000 Lumens
VFM	10,000-14,000 Lumens
VFL	20,000-30,000 Lumens
VFX	40,000 Lumens