

ChromaDMX

4" DMX RGB + Tunable CCT New-Construction Downlight

The ChromaDMX by Proluxe Lighting is the latest advancement in DMX-controllable downlighting. The 4" small aperture and low profile housing ensures the downlight can be used throughout any project. Completely field-modifiable, the ChromaDMX can be installed as a static downlight or a hot-aiming downlight with optical lens accessories. The ChromaDMX can produce over 1-trillion color combinations with its state-of-the-art RGB+TW, COB LED technology.

- Combination static downlight + field adjustable gimbal (hot-aiming) for 363° rotation angles and 0-40° aiming angles
- Out of the box accessories for standard, trimless & adjustable gimbal installations included with every kit (recessed housing required & sold separately)
- Intelligent power scaling features – full power is diverted to white LEDs when RGB is not used to maximize 1000+ lumen output
- Field installable optics for 25° (Native), 45°, & 60° beam spread
- DMX + RDM functionality for remote addressing & management (Requires the use of a DMX addressing tool, not included)
- State of the art COB LED: RGB + 2700K + 6000K Control. Over 1 Trillion possible combinations
- Available with full-color tunable and tunable white Vantage LHUMAN KolorTune™ profiles
- Direct Integration w/Control4 (3.3+ compatible) via Artnet Gtwy – Uses free software driver on market (sponsored by Proluxe)



PROJECT:

TYPE:

LOCATION:


CATALOG NUMBER:



CHROMADMX DOWNLIGHT QUICK SPECS	
VOLTAGE	120-277V AC, 50/60Hz
WATTAGE	15W
LUMENS	1000+ Lm
CCT OPTIONS	RGB+TW (2700K-6000K)
CRI	90+
MOUNTING	Recessed mount
DIMMING	DMX/RDM (100% - 0.5%)
BEAM ANGLE	25° Native, 45° (3.0 Optic Film), 60° (4.0 Optic Film)
PROGRAMMING	Requires a DMX Addressing Tool (not included)
OPERATING TEMP	-20°C (-4°F) to 40°C (104°F)
CERTIFICATIONS	cETLus Listed, FCC, JA8, Wet Location, Air-Tight, Type IC, RoHS
RATED LIFE	50,000 Hours

CHROMADMX DOWNLIGHT ORDERING INFORMATION									
ITEM NUMBER	DESCRIPTION	FINISH	VOLTAGE		CCT	CRI	LUMENS	WATTAGE	DIMMING
DL4-DMX-RGBTW-ICAT	RECESSED HOUSING	Black	120-277V AC		N/A	90+	N/A	N/A	N/A
DL4R-DMX-RGBTW-LED-WH	ROUND TRIM LED KIT	White	120-277V AC	RGB+TW (2700K-6000K)	90+	Up to 1000+	15W	DMX/RDM	
DL4S-DMX-RGBTW-LED-WH	SQUARE TRIM LED KIT	White	120-277V AC	RGB+TW (2700K-6000K)	90+	Up to 1000+	15W	DMX/RDM	
Round Trim LED Kit Includes	Adjustable COB LED Module for DMX/RDM, Round Trim (white finish), Flat Reflector (white finish), Flat Reflector (warm haze finish), Cut-Cone Reflector (white finish), Cut-Cone Reflector (warm haze finish), 3.0 Optic Film (45°), 4.0 Optic Film (60°)								
Square Trim LED Kit Includes	Adjustable COB LED Module for DMX/RDM, Square Trim (white finish), Flat Reflector (white finish), Flat Reflector (warm haze finish), Cut-Cone Reflector (white finish), Cut-Cone Reflector (warm haze finish), 3.0 Optic Film (45°), 4.0 Optic Film (60°)								


CHROMADMX DOWNLIGHT DIMENSIONS

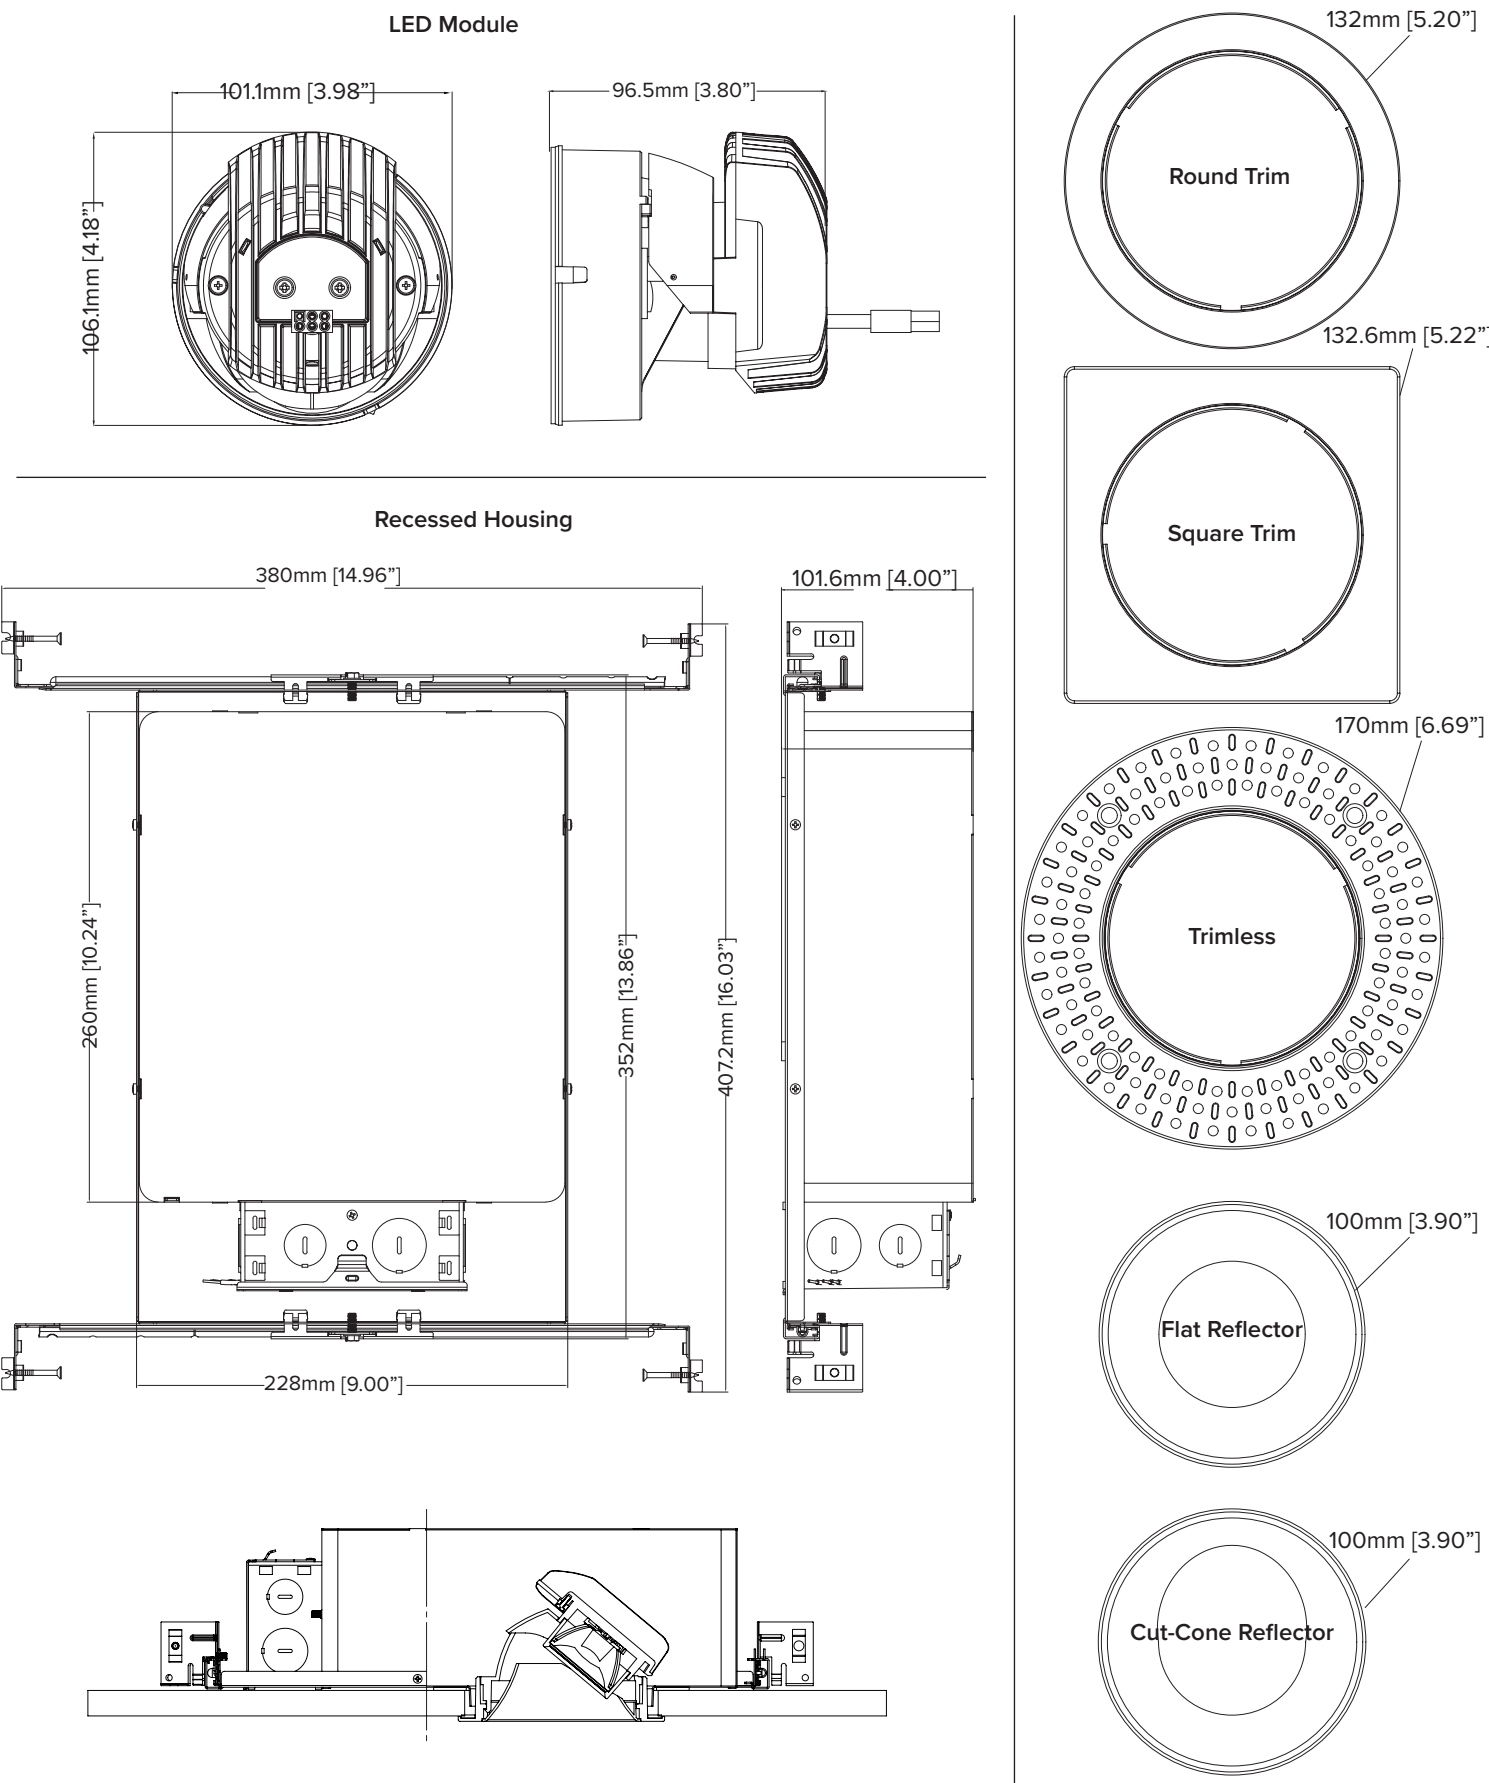

CHROMADMX DOWNLIGHT PHOTOMETRICS

PLX-DL4X-DMX-RGBTW-LED-WH

PART NUMBER	PLX-DL4X-DMX-RGBTW
BEAM SPREAD	Native 25°
LUMENS	523Lm
WATTAGE	8.35W
EFFICACY	62.63Lm per watt
CCT	@3000K
CRI	90
S/MH	(0/180) = 0.41 (90/270) = 0.46

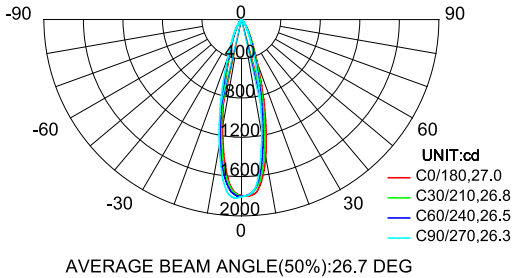


Foot Candles	Vertical Beam Dia.
72.1fc	5' 2.3'
18fc	10' 4.6'
8.01fc	15' 6.9'
4.51fc	20' 9.2'
2.88fc	25' 11.5'
2fc	30' 13.8'

Distance From Light

Note: The diagram indicates the illuminated area and the average illumination when the luminaire is at different distances

PLX-DL4X-DMX-RGBTW-LED-WH

PART NUMBER	PLX-DL4X-DMX-RGBTW
BEAM SPREAD	45° 3.0 Optic Film
LUMENS	519.7Lm
WATTAGE	8W
EFFICACY	64.96Lm per watt
CCT	@3000K
CRI	90
S/MH	(0/180) = 0.65 (90/270) = 0.61

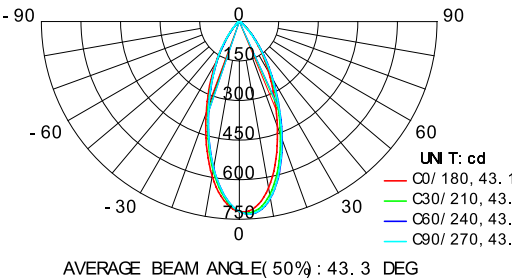


Foot Candles	Beam Dia.
31.5fc	5' 3.9'
7.87fc	10' 7.9'
3.5fc	15' 11.8'
1.97fc	20' 15.8'
1.26fc	25' 19.7'
0.87fc	30' 23.7'

Distance From Light

Note: The diagram indicates the illuminated area and the average illumination when the luminaire is at different distances

PLX-DL4X-DMX-RGBTW-LED-WH

PART NUMBER	PLX-DL4X-DMX-RGBTW
BEAM SPREAD	60° 4.0 Optic Film
LUMENS	499.4Lm
WATTAGE	8W
EFFICACY	65.42Lm per watt
CCT	@3000K
CRI	90
S/MH	(0/180) = 0.94 (90/270) = 0.86

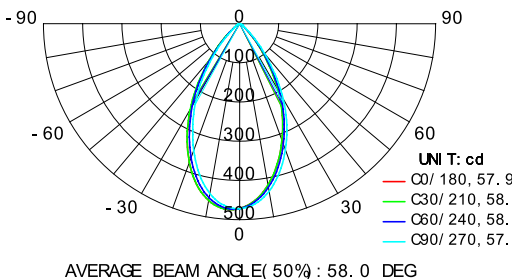


Foot Candles	Beam Dia.
20.7fc	5' 5.5'
5.18fc	10' 10.9'
2.3fc	15' 16.4'
1.3fc	20' 21.8'
0.83fc	25' 27.3'
0.58fc	30' 32.7'


Distance From Light

Note: The diagram indicates the illuminated area and the average illumination when the luminaire is at different distances


CHROMADMX DOWNLIGHT TM-30 DATA - 2700K

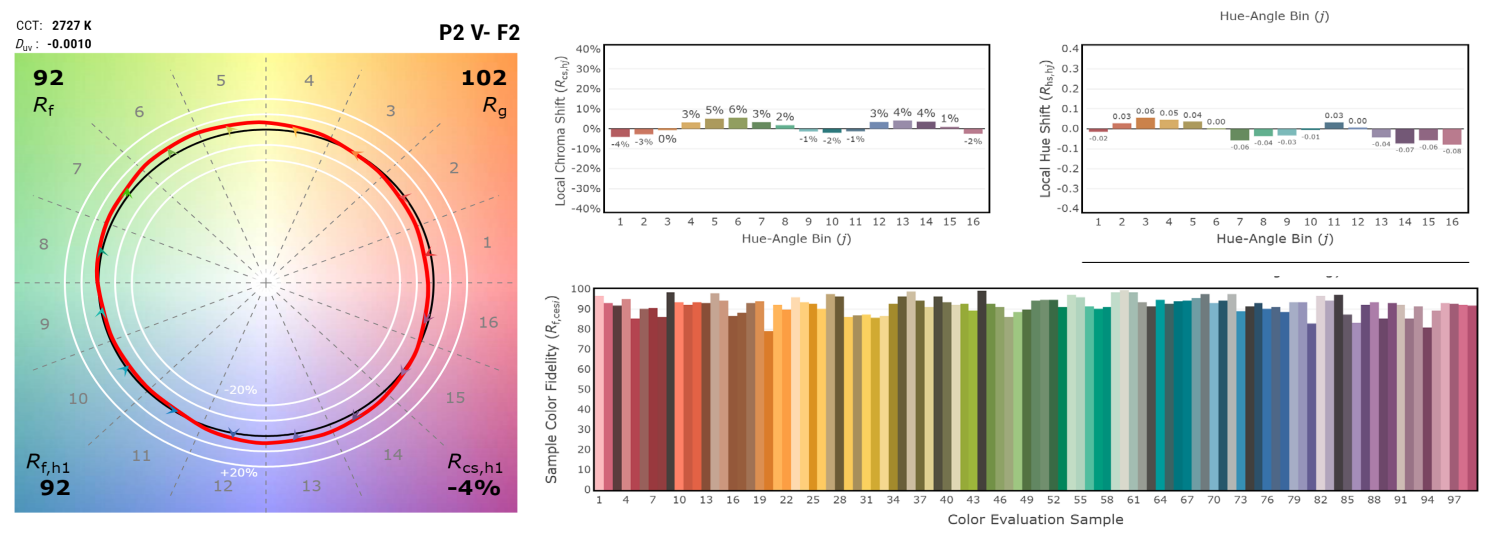


CHROMADMX DOWNLIGHT TM-30 DATA - 3000K

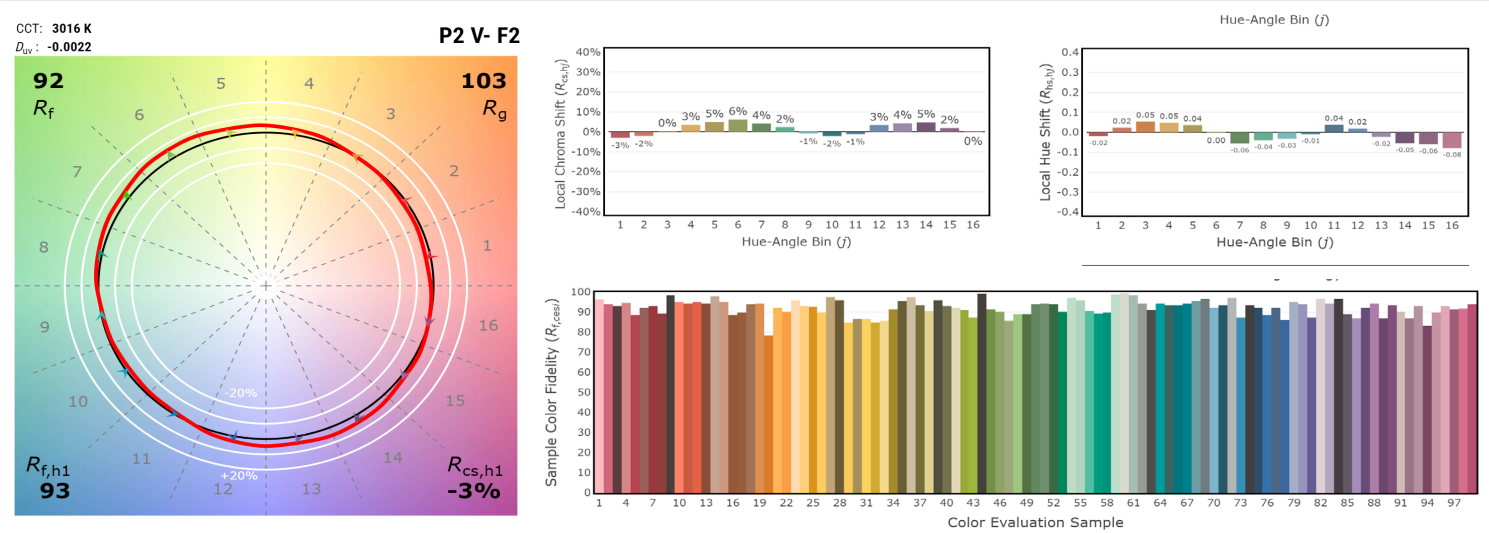

CHROMADMX DOWNLIGHT TM-30 DATA - 6000K

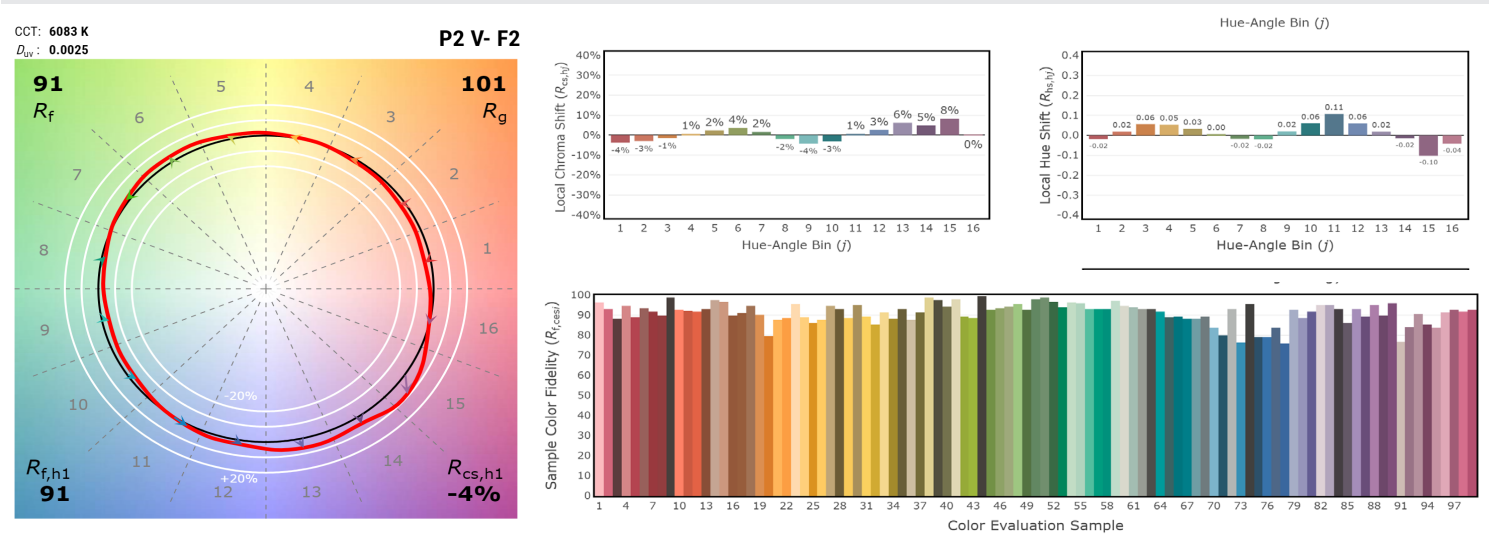

CHROMADMX DOWNLIGHT DIMMING CURVE

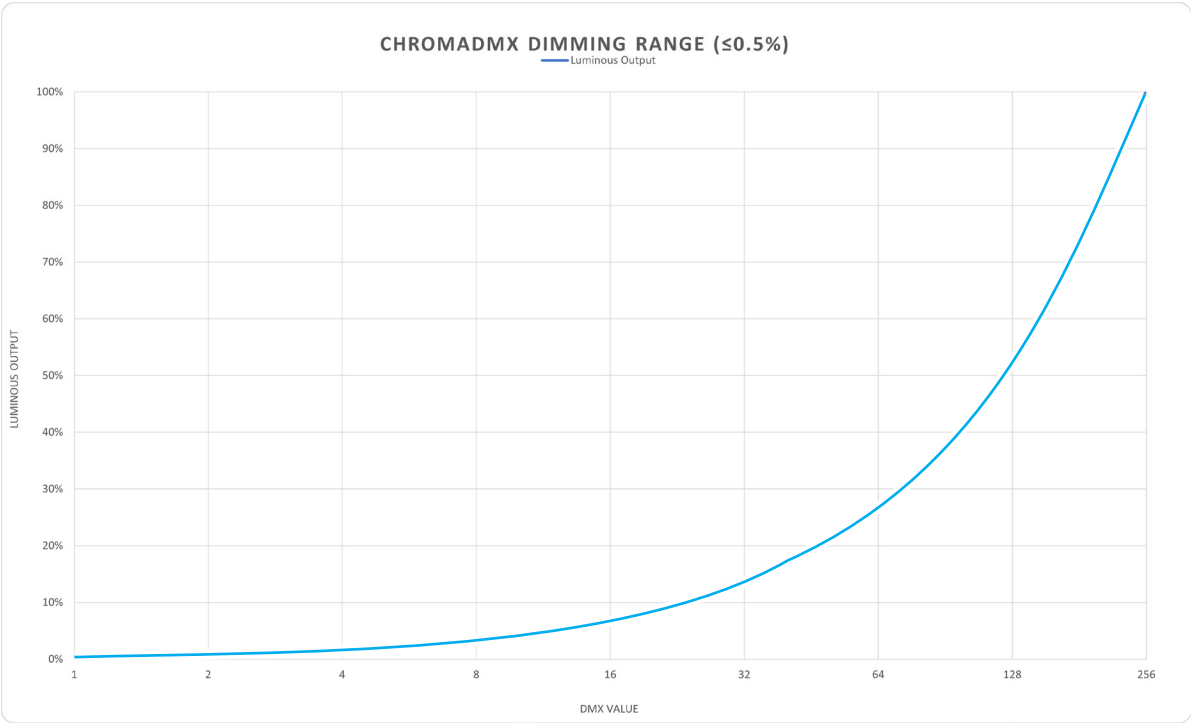



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point at which 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.

Warranty life based on average 8 hours/day use, 7 days/week. Product should be cycled off for at least 6 hours per day.

SAFETY

You must disconnect lighting products from the power supply before servicing or replacing bulbs. Only qualified personnel should install and perform service on lighting products. Periodic inspection and maintenance is required to keep equipment operating properly and at peak performance. Do not mount fixtures on or adjacent to combustible materials.

Lighting products may present a possible shock or fire hazard if improperly installed or attached in any way. Products should always be installed in accordance with their instruction manuals, current electrical codes, and/or the current National Electric Code (NEC). Code compliance is the sole responsibility of the person, company, or party performing the installation of product. Failure to comply with national and/or regional safety codes may result in hazardous or dangerous conditions, damage to property or life, and/or altered product performance/specifications.

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed on the reverse by product category. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for any product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty. Limited Product Warranty applies to lengths up to 75 feet for rope light products.

STANDARD LINEAR WARRANTY

Rope light and linear lighting products in all their various types and shapes, whether LED or incandescent, are wired in series parallel. This means that several individual lamps or LEDs are wired together in series to equal 12V, 24V or 120V. Then these sections are wired together (in parallel) to light up in unison. If one solder joint, lamp or resistor fails, a whole section will not light. Due to the number of elements involved, and the numerous extenuating circumstances beyond our control, American Lighting Inc offers a Standard Linear Warranty on most linear lighting products. The limited liability warranty is listed above, however the Standard Linear Warranty offers replacement product by section due to defective material and/or workmanship for one year beginning from the date of shipment from American Lighting Inc's warehouse to the original purchaser.

USE OF LINEAR LIGHTING IN OUTDOOR APPLICATIONS

Incandescent rope light and LED Flexbrite UL 2388 custom cuts; incandescent and LED Flexbrite pre-packaged kits; and UL Listed (special order) cuts of LED Neon Flexbrite Plus and Economy have factory assembled power connections and end caps that seal the rope from moisture. Due to strict quality control standards, American Lighting is able to offer a limited warranty on these items rather than the standard linear lighting warranty that replaces product by defective section only. For outdoor applications, best practices include using kits interconnected (same length kits are best for color control of White LED Flexbrite) or using custom cuts that do not exceed 75 feet.

For all linear lighting categories, any non-rated field connection made in an outdoor application should be properly sealed with dielectric grease covering all conductive materials; and properly installed power connections and end caps, sealed with dielectric grease, silicone, and heat shrink tube. However, since non-rated (field executed) power connections of linear lighting products cannot be quality controlled, and outdoor use of non-rated product is not recommended, American Lighting cannot warrant the product to any purchaser.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% additional product for a project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.