

LR23317

LED/RDL6/3WO/5CCT/SQ/WT



APERTURE	6"
DISTRIBUTION	FIXED
APPLICATION	NEW CONSTRUCTION/REMODEL

ELECTRICAL

POWER	10W/15W/20W
INPUT VOLTS	120V
INPUT CURRENT	167mA
FREQUENCY	50/60Hz
DIMMING TYPE	TRIAC
DIMMING RANGE	5-100%
FEED WIRE GAUGE	20AWG
BREAKER SPECIFICATION *(15A @120V)	59pcs*

*Mathematically estimated value. Actual capacity may vary by breaker type and installation environment.

PHOTOMETRIC

COLOR CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
LUMEN	800lm/1200lm/1600lm
EFFICACY	80lm/w
BEAM ANGLE	36°

CERTIFICATIONS & SAFETY

LR23315	ETL
IP RATING	IP44
DAMP LOCATION	YES
IC RATED	YES
AIR TIGHT	YES
OPERATING TEMP.	-4°F to 104°F
COST/YR	\$ 2.40
WARRANTY	3 YR

MATERIAL & APPLICATION

HEAT SINK	DIE-CAST ALUMINUM
TRIM	ALUMINUM
LENS	PC ACRYLIC
CUTOUT	Ø5.5"
MOUNTING TYPE	RECESSED
AREA OF APPLICATION	RESIDENTIAL, COMMERCIAL
CEILING TYPE	DRYWALL, WOOD

DRIVER

	POWER	INPUT VOLTS	INPUT CURRENT	FREQUENCY	INPUT POWER	OUTPUT VOLTAGE	DIMENSIONS	KNOCKOUTS
INCLUDED DRIVER	10W/15W/20W	120V	250mA max	50/60Hz	20W max	36V DC	3.5"L X 3.5"W X 1.25"H	3

MODEL	DESCRIPTION	EM POWER	INPUT VOLTS	INPUT CURRENT	FREQUENCY	INPUT POWER	OUTPUT VOLTAGE	RECHARGE TIME	EMERGENCY TIME
LR35126**	LED/EMR/15W/AC/SF/E	15	100-347V	100mA	50/60Hz	12W max	170V DC	24HR	90MINS

*AMBIENT TEMPERATURE: 41°F ~ 122°F

**SOLD SEPARATELY

DIMENSIONS

CUTOUT: Ø5.5"


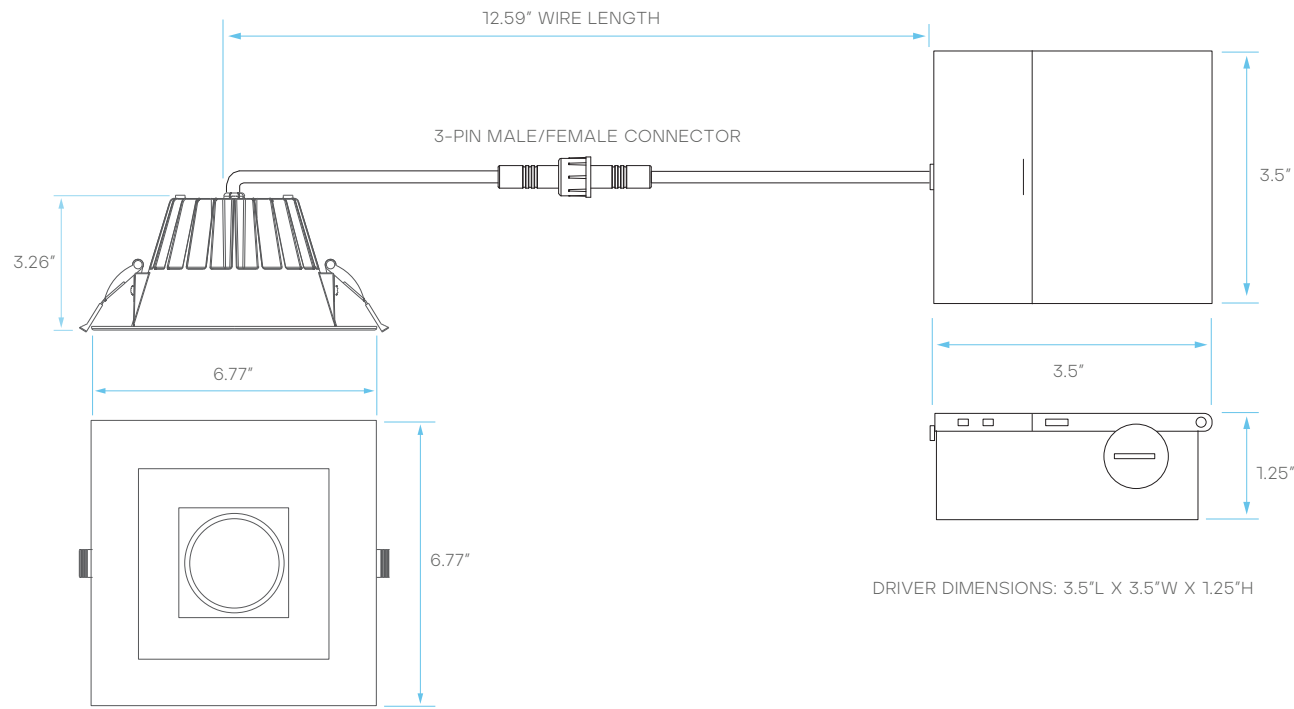



PLATE COMPATIBILITY*

*SOLD SEPARATELY

LR41002
KNOCKOUT
2

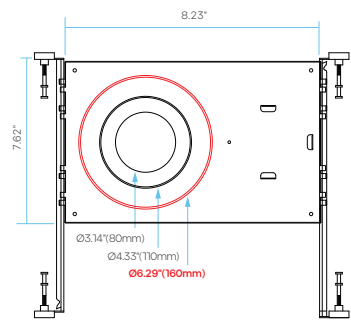

LR41010
KNOCKOUT
R3

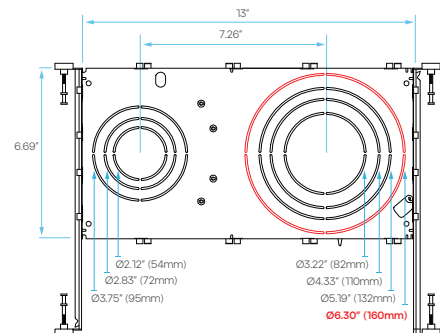

LR41006
KNOCKOUT
5

