

LED SPOTLIGHT CANLESS GIMBAL - 5 CCT SELECTABLE 2", 3", 4"



**CRI
90**

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K




DIMMABLE

TRIAC


**IC
RATED**

**DAMP
LOCATION
RATED**


**3
YEAR
WARRANTY**

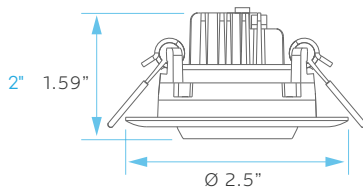

CUTOUT: 2"

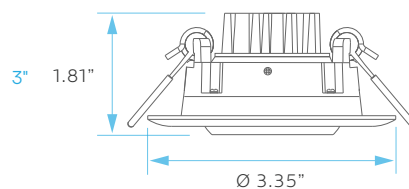

CUTOUT: 2.75"

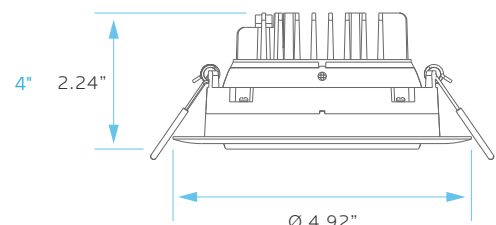

CUTOUT: 4.25"

ELECTRICAL

		MODEL	DESCRIPTION	POWER	INPUT VOLTS	LUMEN EFFICACY	LIFETIME	COST/YR
2"	RD	LR23236	LED5W/DL2/GB/5CCT/FL	5	120V	80	50,000	\$ 0.60
		LR23242	LED5W/DL2/GB/5CCT/RD/BK	5	120V	80	50,000	\$ 0.60
3"	RD	LR23220	LED8W/DL3/GB/5CCT/RD	8	120V	75	50,000	\$ 0.96
		LR23221	LED8W/DL3/GB/5CCT/RD/BK	8	120V	75	50,000	\$ 0.96
	SQ	LR23222	LED8W/DL3/GB/5CCT/SQ	8	120V	75	50,000	\$ 0.96
4"	RD	LR23225	LED11W/DL4/GB/5CCT/RD	11	120V	91	50,000	\$ 1.32
		LR23226	LED11W/DL4/GB/5CCT/RD/BK	11	120V	91	50,000	\$ 1.32

PHOTOMETRIC


MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	ETL	ENERGY STAR	PLATE (KNOCKOUT)
LR23236	LED5W/DL2/GB/5CCT/FL	2700K/3000K/3500K/4000K/5000K	CCT SELECT	400	90	40°	YES	YES	LR41004 (#0) LR41006 (#0) LR41010 (L0)
LR23242	LED5W/DL2/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	400	90	40°	YES		LR41004 (#0) LR41006 (#0) LR41010 (L0)
LR23220	LED8W/DL3/GB/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	90	40°	YES	YES	LR41004 (#1) LR41010 (L1)
LR23221	LED8W/DL3/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	90	40°	YES		LR41004 (#1) LR41010 (L1)
LR23222	LED8W/DL3/GB/5CCT/SQ	2700K/3000K/3500K/4000K/5000K	CCT SELECT	600	90	40°	YES		LR41004 (#1) LR41010 (L1)
LR23225	LED11W/DL4/GB/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	90	40°	YES	YES	LR41002 (#1) LR41006 (#3) LR41010 (R1)
LR23226	LED11W/DL4/GB/5CCT/RD/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	90	40°	YES		LR41002 (#1) LR41006 (#3) LR41010 (R1)

COMPATIBLE WITH:

LR35126
Emergency LED Driver




LR41004
New Construction Mounting Plate




KNOCKOUTS	
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LR41002
New Construction Mounting Plate



KNOCKOUTS	
#0	Ø3.14" (Ø80 mm)
#1	Ø4.33" (Ø110 mm)
#2	Ø6.29" (Ø160 mm)

LR41006
New Construction Mounting Plate



KNOCKOUTS	
#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

LR41010
New Construction Mounting Plate



KNOCKOUTS	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)