

FLX32

LED Light Fixture, 2400-3000 Lumens, 32 Watts
Track, Surface and Suspended

Job Information

Project Name	
Type	
Location	
Quantity	
Date	

Description

32W FLEX series is a high performance LED luminaire with powerful output of 3000 lumens, 95 CRI and smooth sharp cylindrical body with no visible heat sink. Lower energy consumption with crisp, precise CCT, beam control with excellent CRI for various lighting applications, from residential to retail lighting.

Features

Body

Constructed of aluminum, the body features an aesthetically pleasing smooth cylindrical shape.

LED Characteristics

High powered 32W Luminus CXM-11 LED array maintains uniform intensity with a typical luminous flux up to 3000 lumens, with a typical CRI of 95.

Beam Spread

Fixture lens options available in 15°, 25°, 40° and 60° beam spread.

Mounting Options

Multiple mounting options for various applications. Available mounting options include direct mounting onto a 4" octagonal junction box for flushmount and pendant applications, direct mounting onto a 3½" or 4" octagonal junction box for monopoint applications, and 1- or 2-circuit track connectors for track applications (compatible with A-Line, 2- and 3-circuit Powergear, H-style, L-style and Liteline tracks).

Operating Conditions

For indoor use only.

Quickship Made-To-Order

Made-To-Order products ship within seven business days of an order being released.



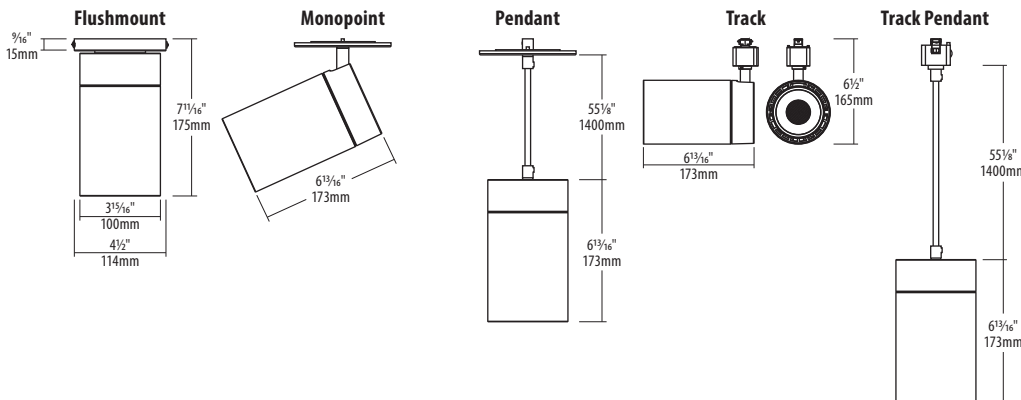
SPECIFICATION

Approved Location	Dry / Indoor
Beam Angle	15° / 25° / 40° / 60°
CCT	2700 K / 3000 K / 3500 K / 4000 K
Certification	cETLus
Class II	Yes
Color	BK / SL / WH
CRI	95
Dimming	Yes
Dimming Tech	TRIAC/ELV
Input	100-135V AC, 60Hz
Lumens	Up to 3000
Lumens per Watt	Up to 94
Power Factor	0.98
Projected Life	70% @ 50,000 hrs
Warranty	5 years
Wattage	32W







CCT	LUMENS
2700 K	2,400
3000 K	2,500
3500 K	2,600
4000 K	3,000



Technical Drawings



Ordering Guide

Connector Type ¹	Color Temperature	Beam Angle	Mounting Type	Finish
 - FLX32 -    - 				
 BLANK : No connector A : A-Line H : H-style L : L-style LL : Liteline P2 : 2-Circuit Powergear P3 : 3-Circuit Powergear	27 : 2700 K 30 : 3000 K 35 : 3500 K 40 : 4000 K	15 : 15° 25 : 25° 40 : 40° 60 : 60°	F : Flushmount M : Monopoint P : Pendant T : Track TP : Track Pendant	BK : Black WH : White SL : Silver

Notes:

¹ Available for Mounting Type "T" and "TP" only.

Quickship option is available on orders of 100 pieces or less, and will ship within 7 business days. Options must be selected from Quickship section to qualify.

Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Accessories



FLX38-HC-xx
Honeycomb louver to reduce glare from light source. Available in Black (BK), Silver (SL) and White (WH).



FLX38-SN-xx
Snoot to reduce glare and focuses projected light from light source. Available in Black (BK), Silver (SL) and White (WH).



FLX38-EXT-xx¹
4" Extender. Available in Black (BK), Silver (SL) and White (WH).




FLX38-LINEAR-LENS
Linear spread lens.



FLX38-SL-LENS
Soft lens.

Notes:
¹ Not recommended for use with Mounting Options "M" and "T".

Ordering Guide (Complete with assembled accessories – must select at least one accessory)

Connector Type ¹	FLX32	Color Temp.	Beam Angle	Fixture Type	Finish	Cylinder Extension ²	Mounting Accessory	Optical Accessory	Lens
<div>QUICKSHIP 7-DAY</div> <div>Highlighted option denotes Quickship.</div>	<div>BLANK : No connector A : A-Line H : H-style L : L-style LL : Liteline P2 : 2-Circuit Powergear P3 : 3-Circuit Powergear</div>	<div>27 : 2700 K 30 : 3000 K 35 : 3500 K 40 : 4000 K</div>	<div>15 : 15° 25 : 25° 40 : 40° 60 : 60°</div>	<div>F : Flushmount M : Monopoint ⁴ P : Pendant, 55" T : Track TP : Track Pendant, 55"</div>	<div>BK : Black SL : Silver WH : White</div>	<div>N : No extender X : Cylindrical body extender, 4"</div>	<div>ST : No mounting accessory R1 : 1' Rod³ R2 : 2' Rod³ R3 : 3' Rod³ R4 : 4' Rod³ C1 : 10' Cord³ C2 : 12' Cord³ C5 : 15' Cord³</div>	<div>A : No optical accessory S : Snoot</div>	<div>F : No lens L : Linear lens T : Soft lens H : Honeycomb louver</div>

Notes:
¹ Available for Fixture Type "T" and "TP" only. ² Only for Fixture Type "F", "TP" and "P". ³ Only for Fixture Type "TP" and "P". Cord length can be customized with 1" increments. ROD length can be customized with one more ROD only. Stem RODF sizes 2", 3" available in BK, FWH, WH; Stem RODF sizes 12" - 48" available in BK, BN, FWH, WH. ⁴ Only available with Rod Mounting Accessories. Quickship option is available on orders of 100 pieces or less, and will ship within 7 business days. Options must be selected from Quickship section to qualify. Accessories are sold separately. For additional options please consult your Liteline representative.
Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Technical Drawings (Assembled accessories)

