

IMPORTANT: Read all instructions before installing track. Retain instructions for future reference and also refer to SHOP DRAWING PROVIDED AS PER THE PROJECT NAME.

SAFETY: This fixture/track must be wired in accordance with national electrical code and local regulations. All work to be complete by a qualified electrician.

WARNING: Risk of electrical shock! Ensure power is OFF from the electrical panel before starting installation or attempting any maintenance.

CAUTION: Ambient temperature not to exceed 40°C under normal operations.

INSTALLATION INSTRUCTIONS:

Note: Layout structure, as shown on supplied shop drawing, on a smooth surface. Refer to shop drawing for component list.

ASSEMBLY INSTALLATION:

1. Slide side brackets onto main track [Fig. 1].
2. For trimless and recessed application, secure the bracket with provided set screws [Fig. 2].
3. Connect track sections with provided brackets (included with in-line power feeds and in-line connectors) [Fig. 3].
4. Attach end caps [Fig. 4,5].
5. For suspended application, attach suspension brackets [Fig. 6].
6. For recessed application, attach recessed clips [Fig. 7].
7. Secure KLICK system to structure with screws (provided by others).

ASSEMBLY WIRING:

1. Connect power feed wires to driver. Follow driver instructions.
2. Place and secure driver in the driver enclosure (when applicable).






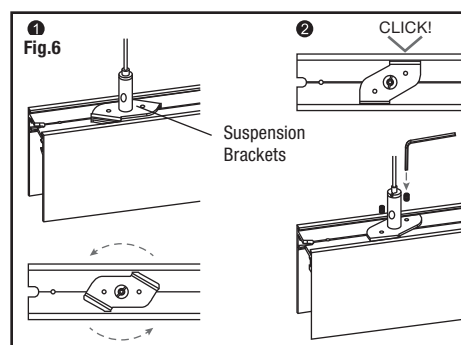


Fig.7

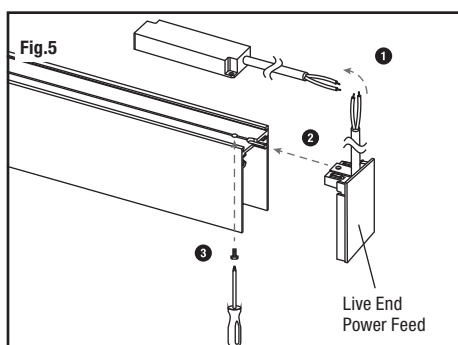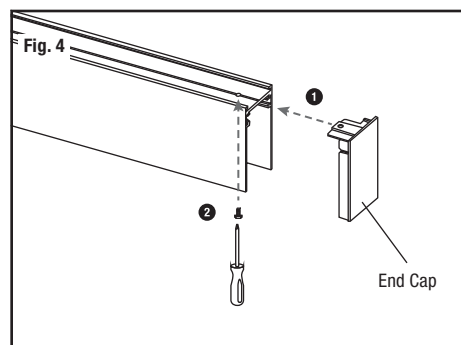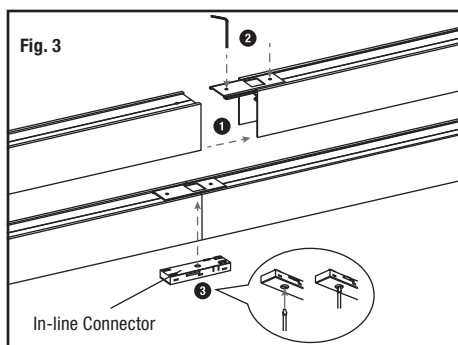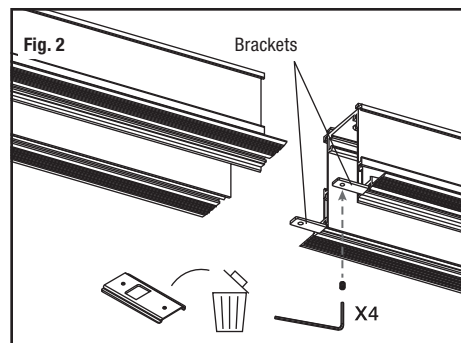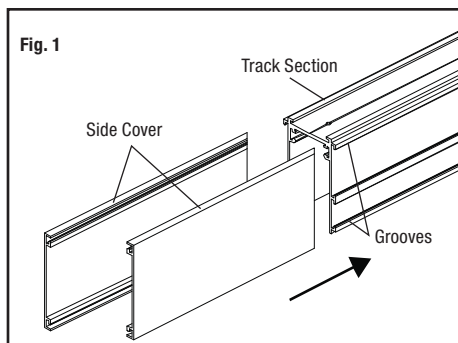