

XS-Line: Security Flood Lights

3-CCT + 2-Power + Ambient Light + Motion Sensor



-BZ



-BL



-WH

WATT	LUMENS
16	2,080
25	3,250

Detail Specification:

- Finish: Bronze, White, Black
- IP Rating: Wet Location (IP65)
- Beam Angle: 120°
- CCT: 30/40/50K Selectable
- Power Selectable: 25/16W
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Clear
- Average life (L70) of 50,000 hours

Applications:

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell on each fixture
 - Sensitivity may be adjusted
- Adjust motion detection range:
 - 180° Detection Range
- Adjust the time the light stays on full brightness:
 - 1 Minute
 - 5 Minutes
- Ambient Light + 2-Power Selectable
 - 16W w/ Ambient Light
 - 25W w/ Ambient Light
 - 25W w/o Ambient Light
- Select-n-Switch Technology: 3-CCT + 2-Power Selectable

Driver Options:

- UNV: 120V
- Non-dimmable (PIR Sensor is included with the fixture)
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Mounts to j-box

Certifications:

- ETL Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-XSL2R-2P25-TRI-BZ-PIR

Bronze Finish

LED-XSL2R-2P25-TRI-BL-PIR


Black Finish

LED-XSL2R-2P25-TRI-WH-PIR

White Finish

Specs and model numbers are subject to change with or without notice

FEATURES

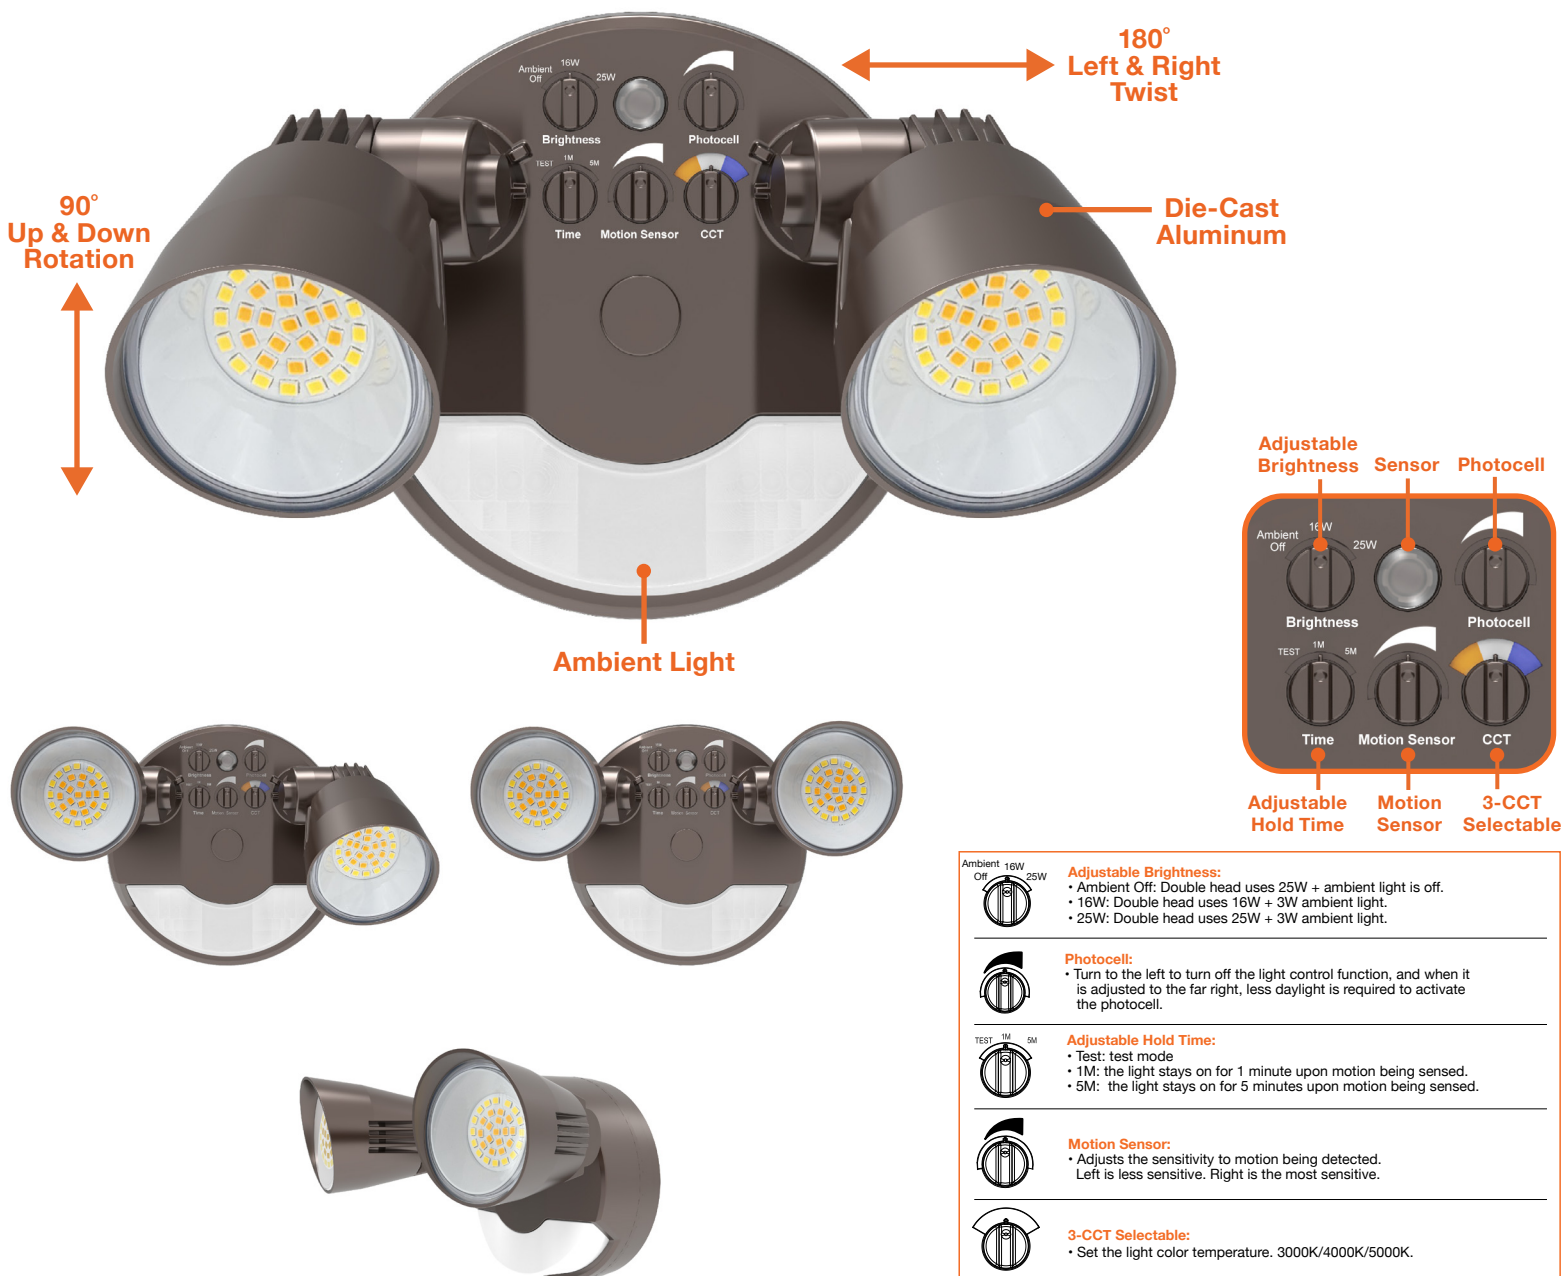

DIMENSIONS

