



## MODEL FF109-350

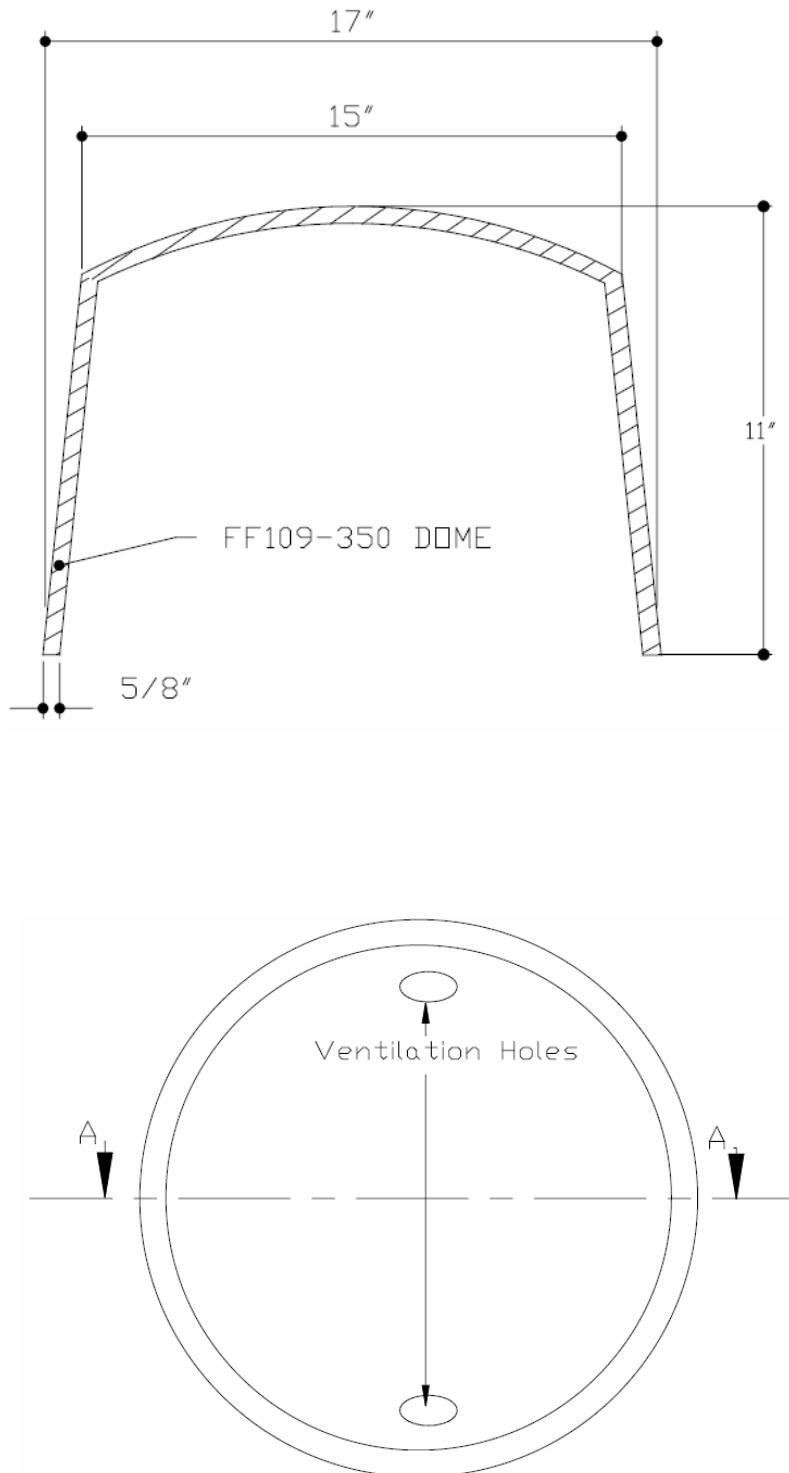

Model Number	Inside Height	Inside Diameter
FF109-350	10 3/8"	15"
Performance Data		
<b>For Use:</b> <ul style="list-style-type: none"> <li>ETL - Intertek certified to maintain the fire rating (1 hour) of fire-rated floor/ceiling assemblies</li> </ul>		
		
General Information		
<b>Benefits:</b> <ul style="list-style-type: none"> <li>60 minute protection.</li> <li>Fits most popular recessed light fixtures.</li> <li>Can be used in L500 floor/ceiling assemblies.</li> <li>Lightweight (approx. 2.5 lbs).</li> <li>Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required.</li> <li>Flexible material enables the cover to be fitted around obstacles or retro-fitted.</li> <li>Enhances the acoustic protection of the ceiling.</li> <li>Reduces heat loss through the fixture.</li> <li>Significant energy cost savings.</li> <li>Maintenance free.</li> </ul>		
Manufactured By		
<b>Tenmat Inc</b> 23 Copper Drive Newport, DE 19804 Phone: (302) 633-6600 Fax: (302) 633-6838 Email: <a href="mailto:info@tenmatusa.com">info@tenmatusa.com</a> <a href="http://www.TenmatUSA.com">www.TenmatUSA.com</a>		