

CCPRO10-A

Configurable Constant Current LED Driver 0-10V and Phase Dim, 10W



IP20



High efficiency, flicker free dimming.

With its wide operating window, multiple dimming control protocols, configurable current, and optional enclosure, the CCPR010A provides the user with a high level of flexibility.

Haute efficacité, gradation sans scintillement.

Avec sa large fenêtre de fonctionnement, ses multiples protocoles de contrôle de gradation, son courant configurable et son boîtier en option, le CCPR010A offre à l'utilisateur un haut niveau de flexibilité.

Atenuación sin parpadeo de alta eficiencia.

Con su amplia ventana operativa, múltiples protocolos de control de atenuación, corriente configurable y gabinete opcional, el CCPR010A brinda al usuario un alto nivel de flexibilidad.

Specifications

Electrical

Input	100-277VAC, 50/60 HZ
Power Factor	0.95
Output	3-42VDC Constant Current, Class 2
Max. LED Power Output	10W
Drive Current (mA)	150, 200, 250, 300, 350, 400, 450, 500mA

Environmental

Ingress Protection	IP20
Operating Temperature	-20°C ~ +45°C
Lifetime	50,000 HR
Integrated Protection	Thermal Cutoff, Short Circuit, Overload, And Reverse Polarity

Control


No. of Channels	1
Control Protocols	Phase, 0-10V
Dimming Range	100% - 1%

Mechanical

Housing Materials	PMMA, Polycarbonate
Fixing Type	Screw Down
Connection Type	12-22 AWG Screw Terminal Block
Programming	Dip Switch Configurable

Dimensions

CCPR010A-N
Without Enclosure

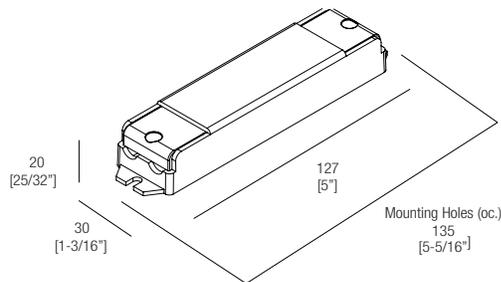

CCPR010A
BX Enclosure, 7/8" KOs

