

The Calculite 2" family features downlight, accent adjustable, and lensed wall wash serving as a complete recessed offering to accommodate all recessed application needs. The 50° light cut off and multiple adjustable beam angles provide quality light in a miniature aperture.



Project:		
Location:		
Cat.No:		
Type:		
Lamps:	Qty:	
Notes:		

Follow the ordering guidelines below. Each step is a separate order line.

Step 1	Frame: Optional accessories available. Ordered & shipped separately.		
	Frame	Example: 2RN	
	C2		
Step 2	Engine & Trim: Ordered & shipped as a single product.		
	Engine	Example: C2RDL06SPUPZULS6010-C2RDLWT	
Step 3 (optional)	Accessories: Ordered & shipped separately.		

Engine

example: C2RDL06SPUPZULS6010

Series ¹	Style	Lumens	CRI	CCT	Beam	Dimming / Voltage	Flange	Options
C2R Calculite 2" round	DL Downlight	06 600lm	9 90CRI	27 2700K	NS Narrow Spot (15°)	UPZU 0-10V 1%	— Flanged (leave blank)	MesoOptics
C2S Calculite 2" square		09 900lm		30 3000K	SP Spot (19°)	ELV 3%	F Flangeless ³	— Symmetrical soft focus
		15 1500lm ²		35 3500K	NF Narrow Flood (30°)	Triac 3%		LS6010 Linear spread 60x10
				40 4000K	FL Flood (55°)	Unv (120V/277V)		ASY21 Asymmetrical 21° bend angle
						LU Lutron PEQ 100% – 0.1%		ASY8 Asymmetrical 8° bend angle
						Unv (120V/277V)		
								Hex Cell Louver
								HCL 2" hex cell louver Holder standard on light engine, order with MesoOptics film option or blank for symmetrical (ex. HCLLS6010)

Trim

example: C2RDLWT

Series	Style	Finish	Flange	Options
C2R Calculite 2" round	DL Downlight	WT Textured white	— White F Flangeless ³	WL Wet location
C2S Calculite 2" square		WH White (matte) BK Black (painted matte) BT Textured black BZ Bronze D Aluminum diffuse CD Clear diffuse (applied finish)	— White (matte) P Matching reflector F Flangeless ³	
		Special painted finishes available with RAL number.		

1. Standard light engine may be used as a remodeler. Optional traditional frame-in kits are available.
2. The 1500lm (15) lumen option is available for non-IC only.
3. Flangeless option code must be ordered for both light engine and trim. Mud-in ring is integral with the light engine.
4. Requires IRT9015 IR remote & Interact Pro App for commissioning.
5. Mud-in kits provided as standard with engines but are available as accessories as needed to support construction.

Accessories (order & install separately)

Field installed changeable TIR optics

CA2NSSFR 15° TIR reflector

CA2SPSFR 19° TIR reflector

CA2NFSFR 30° TIR reflector

CA2FLSFR 55° TIR reflector

Accent accessories

CL2HCL 2" hex cell louver

MesoOptics accessories

for Downlight & Wall Wash

CA2RSYM Symmetrical

CA2RLS6010 60x10 linear spread

CA2RASY21 21° bend angle

CA2RASY8 8° bend angle

Accessories

SWCS New or remodel construction, integral RADIO or remote (recessed or surface) sensing with 0-10v luminaires. See page 5 for more details.⁴

CA2RFT Round 2" Mud-in Kit⁵

CA2SFT Square 2x2 Mud-in Kit⁵

C2DL Calculite 2"

Round and Square Downlight

Applications

- Ideal for use in retail, restaurants, residential, and office spaces to accentuate the space and provide tactical or ambience lighting from a minimalistic aperture
- The light engine is designed to be installed as a retrofit without need for a frame. Frames are optional to accommodate ceiling construction.
- Driver pod is tethered electrically to light engine.
- All components are designed to accommodate below ceiling accessibility through the aperture without need for tools.

Dimensions

- Max Ceiling Thickness:** 1.50"
- Ceiling Cutout:** 3"

Frame-in-kits (optional)

- Light engines are designed to be installed as a retrofit without need for a separate frame
- Die formed steel construction with 1/2" collar for ease of cutting the hole in ceiling.
- Rough-in wiring is done on the light engine driver pod.
- Four models offered:
 - 2RN:** 2" Round New Construction, Non-IC
 - 2SN:** 2" Square New Construction, Non-IC
 - 2RA:** 2" Round New Const., IC, AirSeal, CCEA*
 - 2SA:** 2" Square New Const., IC, AirSeal, CCEA*

* 900lm maximum for IC applications.

Optical systems

- TIR** optics precisely control the beam pattern. Optics are field changeable.
- PET** film provides a clean beam with mitigated spill and precise color mixing. Film is held in place via a holder integral to the engine that fits precisely TIR optic and LED socket.
- COB** (chip on board) provides long useful life with precise color control over time.
- Finishing section trims are durable die cast aluminum with precision painted finish. May be easily repainted in the field to match desired aesthetic appeal.
- 50° cutoff angle.
- Wet location (WL) option lens is clear tempered glass secured to the top of the trim.

Dimming

- UPZ option is universal 0-10v (1%), electronic low voltage (3%), and triac (3%) in a single driver
- Lutron PEQ (L) dimming to 0.1%

Hex Cell Louver

- Available as factory installed option or field installed accessory.
- Light engine includes holder attached to primary TIR optic.
- Holder supports one MesoOptics film and one louver.

MesoOptics optical diffusion film

- PET film containing surface relieved, microscopic light diffusing structures/elements.
- Provides a clean beam with mitigated spill at articulated angles.
- Optimizes luminaire efficacy via high optical transmission.
- Homogenizes light engine luminance providing smooth gradients of white light.
- Other distribution options available including linear spread and asymmetric.
- May be field installed with available accessories.
- Holder is standard on light engines.

Light engine

- Die cast heat sinks provide optimized passive thermal management to maximize LED lumen maintenance.
- Precision spun lower collar mechanically attaches to heat sink assembly tool-free via springs. Integral leaf springs for flanged configurations allow easy installation into the ceiling or on optional frame-in kits.
- For flangeless applications, mesh mud-in ring is integral to the lower collar eliminating the need to handle/order an accessory. Must specify flangeless light engine and trim. Separate mud-in rings are available as accessories to support construction (CA2RFT, CA2SFT).
- Predicted 70% lumen maintenance to >65,000 hours.
- 32°-86°F ambient operating range (0°-30°C).

Labels and listings

- cULus listed for damp locations, Wet listed for use in covered ceilings with "WL" trim option code
- CEC Title 24 JA8 certified
- CCEA listing on 2RA/2SA frames
- Red List Declare label certified, ID SIG-0018 ([View full Declare label](#))

Warranty



5 year limited warranty
Visit [Signify.com/warranties](#)
for more information on Signify's standard 5-year limited warranty on complete luminaire systems.

Declare

Lightolier Calculite 2" Genlyte Solutions by Signify

Final Assembly: Apodaca, Nuevo León, México
Life Expectancy: 10+ Year(s), Warranty 5 Year(s)
End of Life Options: Recyclable (90%), Landfill (10%)

Ingredients:

Aluminum; Small Electrical Components - RoHS Compliant¹; Iron; Silicones; Fatty acids; castor-oil, caustic-oxidized, distn. residues, esters with 1,3-butanediol; Carbonic acid, polymer with 4,4'-(1-methylethylen)bis[phenol]; Steel; Barium sulfate; Silicon; Titanium dioxide; Copper; Magnesium; Poly[imino(1,6-dioxo-1,6- hexanediy)imino-1,6-hexanediy]; Zinc; Polyvinyl Chloride; Polyethylene Terephthalate; Manganese; 1,3,5-Triglycidyl-s-triazinetrione; Amorphous silica; Tris(2-ethylhexyl) trimellitate; Urethane (Ethyl carbamate); Pulp, cellulose; Chromium, metallic; Polyethylene; Titanium; Silicone; Graphite; Tin, Organic; Nickel (Metallic); Talc; Graphite; Carbon black; Antimony oxide (Antimony trioxide); Carbon black; Polytetrafluoroethylene; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Kaolin, calcined; Calcium Carbonate; Melamine cyanurate; Phosphorus; 1,3,5-Triazine-2,4,6-triamine, phosphate (1:1); Quartz; Zinc oxide; Sulfur, Elemental

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:

LBC Red List Free
 LBC Red List Approved
 Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance:

Not Applicable

I-14 Responsible Sourcing:

Not Applicable

SIG-0018
EXP. 01 JUN 2026
Original Issue Date: 2025

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](#)

0-10v/ELV/Triac Electrical Tables

Light Engine	Input volts	Input current	Drive current	Input power
C2_06_UPZU	120V	0.08A	250mA	9.8W
	277V	0.04A	—	—
C2_09_UPZU	120V	0.11A	350mA	13.4W
	277V	0.05A	—	—
C2_15_UPZU	120V	0.19A	600mA	23.3W
	277V	0.08A	—	—


Lutron Electrical Tables

Light Engine	Input volts	Input current	Drive current	Input power
C2_06_LU	120V	0.08A	250mA	9.7W
	277V	0.04A	—	—
C2_09_LU	120V	0.11A	350mA	13.6W
	277V	0.05A	—	—
C2_15_LU	120V	0.19A	600mA	23.3W
	277V	0.08A	—	—

C2DL Calculite 2"

Round and Square Downlight

interact

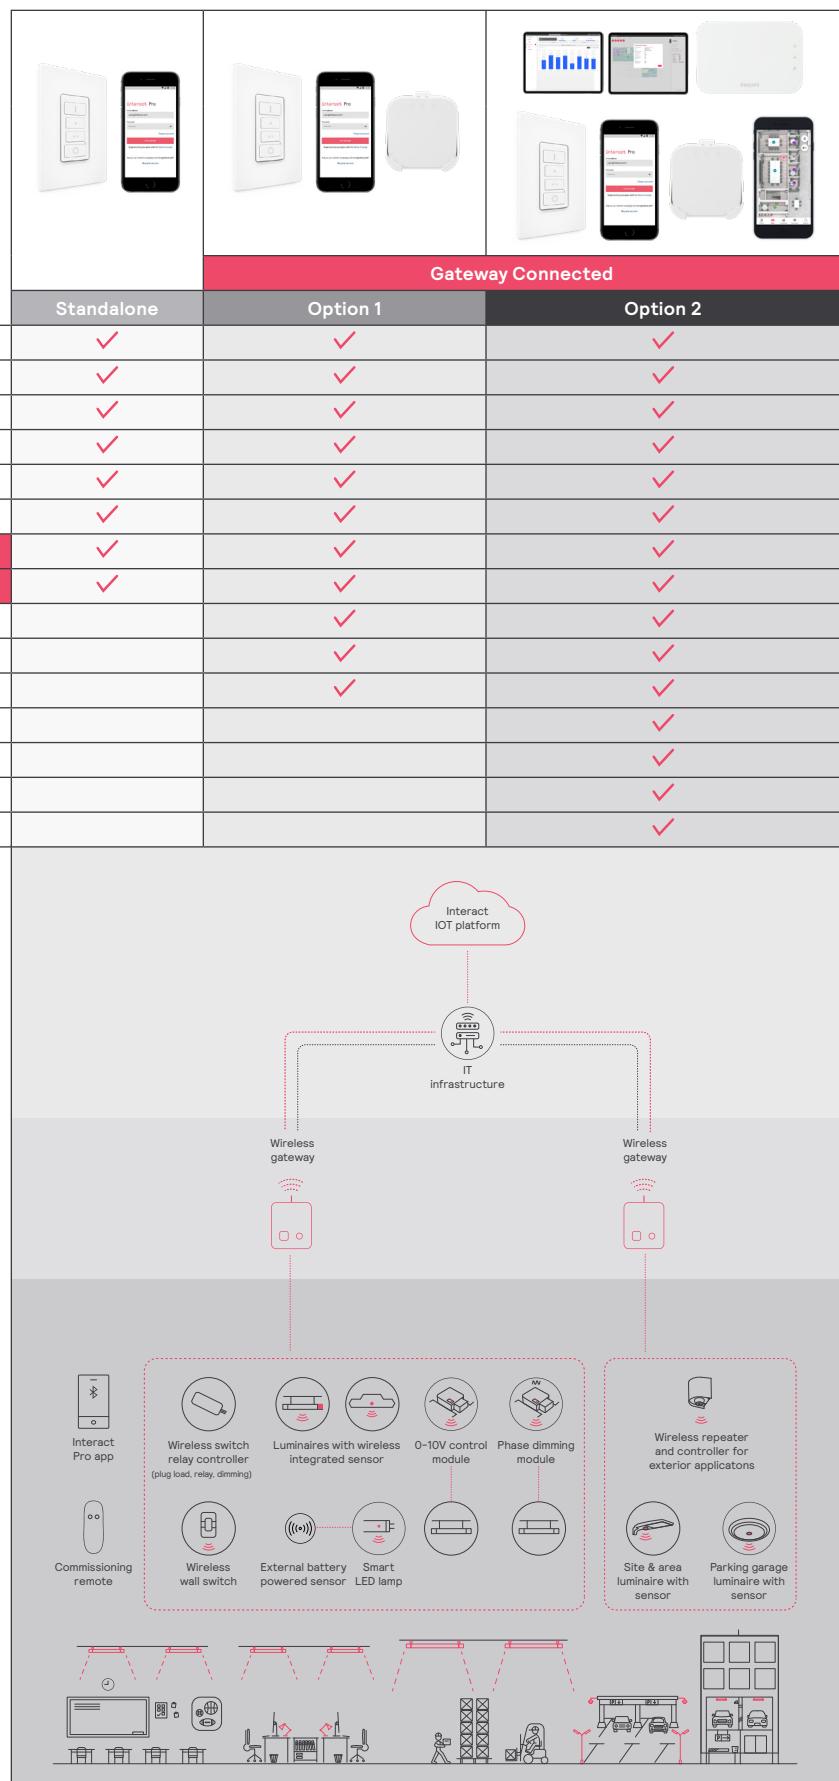

C2DL Calculite 2"

Round and Square Downlight

Wireless controls options

Interact

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the standalone mode (similar to SpaceWise) when configured without a gateway or in a cloud connected mode if a compatible gateway is used.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & BlueTooth connectivity. The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote on-site to identify and group devices together.

Compatible with:

- SWS200 & UID8465 wireless scene switch
- Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
- Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
- LCN3110: battery powered IP65 presence sensor, OCC sensor IA CM IP65W
- LCN3120: battery powered IP65 presence & daylight sensor, OCC-DL sensor IA CM IP65 WH
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

Radio only sensor (RA or RADIO)

- Integral RA or RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.
- Interact includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity. The App provides flexibility to choose between a gateway or non-gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely, identify and group devices together onsite.
- Compatible with SWS200 and UID8465 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact visit: interact-lighting.com/interactproscalablesystem

SWCS Accessory

- Recessed Interact accessory for use in new construction or remodel construction for use with 0-10v luminaires. Available for integral RADIO, or remote sensing in either recessed or surface mounting. Refer to spec sheet for more details. https://www.usa.lighting.philips.com/api/assets/v1/file/Signify/content/SWCS-ESS/SWCS_Specification_Sheet.pdf

Sensor bundle (IAOSB or SB)

- A wireless IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- View all your projects under one dashboard and easily compare insights from multiple projects in one view.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available. Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- IAOSB or SB option in addition to occupancy and daylights sensing supports advanced IoT capabilities, such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: interact-lighting.com/interactproscalablesystem

Emergency Options (ER100)

- **Power Sensing** (factory default) – Recommended UL924 option requires unswitched power sense line, absence of voltage on the normal circuit triggers luminaire to 100% output.
- **Power Interruption Detection** (field option) – Detects AC power interruption >30ms triggers 90 minute emergency mode with luminaire at 100% output.


Interact supported sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZigBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZigBee + Bluetooth	RADIO	RADIO	RA	RA
ZigBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZigBee + Highbay + Sensing	-	SWZCSH	-	-


C2DL Calculite 2"

Round and Square Downlight


Round Engine

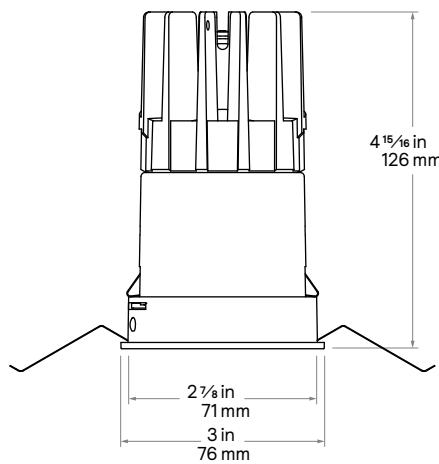

Round Trim

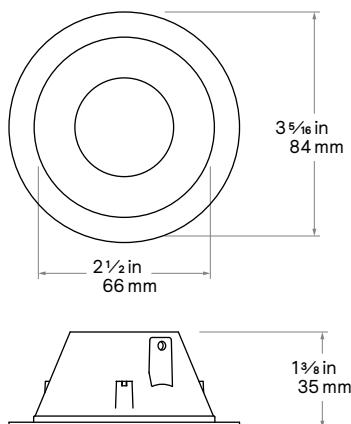


Round Mud-in ring

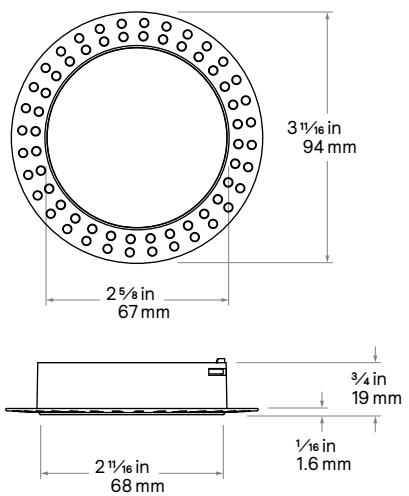


* Mud-in rings are integral to the light engine.
Must order flangeless light engine and trim
with (F) option code.


Square Engine

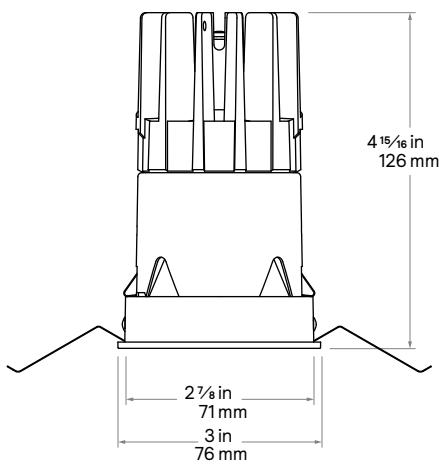

Square Trim

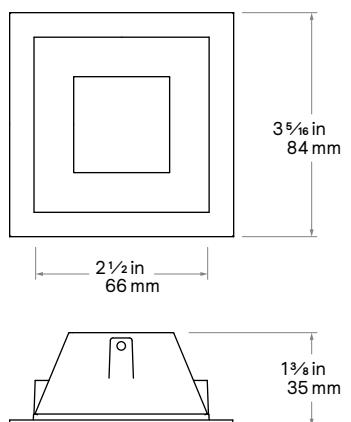

Square Mud-in ring

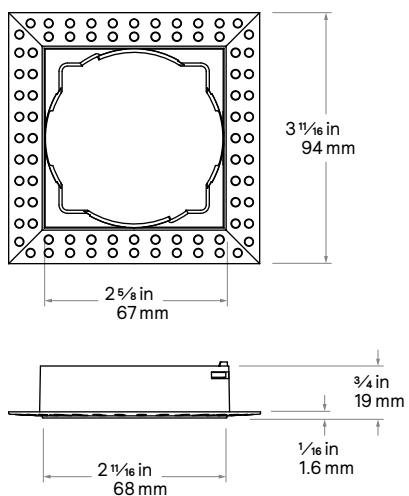


* Mud-in rings are integral to the light engine.
Must order flangeless light engine and trim
with (F) option code.

C2DL Calculite 2"

Round and Square Downlight

Frames

The standard C2R/C2S light engines may be installed non-IC as a remodeler with no additional frame-in kit required. Optional frames below are available to facilitate ceiling construction

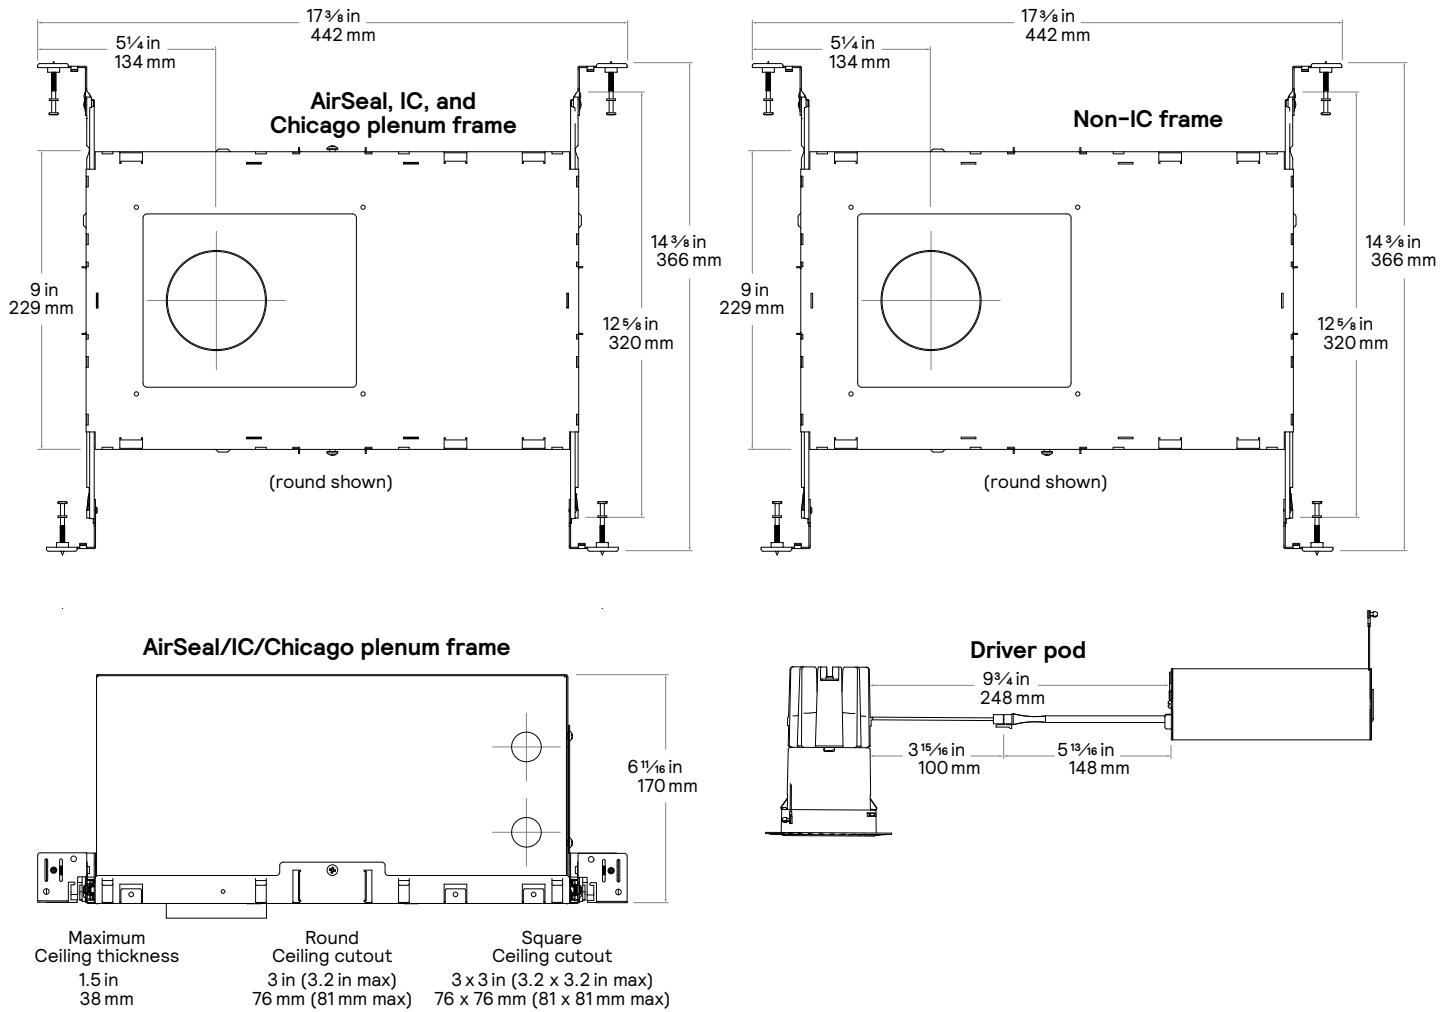

C2DL Calculite 2"

Round and Square Downlight

Finishes Shown as round reflectors but represent the finish of Calculite square reflectors.



Matched Reflector



Flangeless



Matched Reflector



Flangeless

Clear diffuse (CD): Diffused painted finish with a hint of sparkle where a refined finish is desired.


Aluminum diffuse (D): Semi-specular finish that softens the light at the source of the reflector and creates a subtle, even luminance from the reflector cone.



Matched Reflector



Flangeless

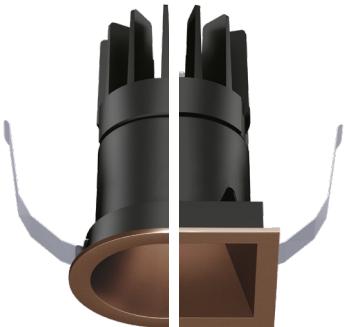

Matched Reflector



Flangeless

Black Textured (BT): Textured Matte finish that provides the lowest aperture brightness possible and significantly reduces source identification in a ceiling.

Bronze (BZ): Matte finish that provides the lowest aperture brightness possible and significantly reduces source identification in a ceiling.




Matched Reflector



Flangeless

White Textured (WT): Textured finish that provides the brightest illuminated aperture and provides the smoothest transition to most ceilings when off (white is only available with a white flange).




Mud-in ring (WH): Low profile, machined aluminum mud-in ring provides a raised rib to plaster up to and a 3/16" flange thickness. The ring is attached to the ceiling material directly via flat head screws (contractor supplied).

C2DL Calculite 2"

Round and Square Downlight

Spot beam, 1000lm Engine, 66.9lm/W at 14.0W

Candela Curve

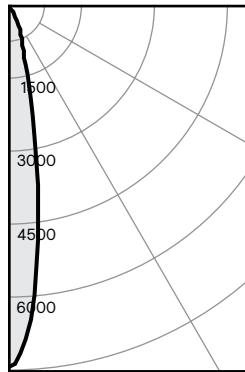

Engine: C2RDL09935SPUOZU

Trim: C2RDLWT

Output lumens: 936 lms

Input watts: 14 W

CRI: 90 min

CCT¹: 3500K

Spacing Crit.: 0.32

Beam Angle: 18°

Zonal summary

Zone	Lumens	%Luminaire
0-30	888	94.9%
0-40	906	96.8%
0-60	926	98.9%
0-90	936	100.0%

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	236	1.6'
6'	164	1.9'
7'	120	2.2'
8'	92	2.6'
9'	73	2.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Adjustment Factors

Finish	CCT (90CRI)	Lumens
WT = 100%	4000K = 107%	1500lm = 167%
BT = 97%	3500K = 100%	900lm = 100%
BZ = 97%	3000K = 93%	600lm = 66%
D = 101%	2700K = 93%	
CD = 102%		

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	45.0	0.62
6'	29.0	0.41
7'	21.0	0.29
8'	17.0	0.24
9'	14.0	0.19

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 66.9lm/w


Report²: STMR-3196

Coefficients of utilization

Ceiling	80%				70%				50%				30%				
	70	50	30	10	50	10	50	10	50	10	50	10	50	10	0		
RCR Zonal cavity method - Effective floor reflectance = 20%																	
0	119	119	119	119	116	116	111	111	106	106	101	100	99	97	93	90	
1	115	113	111	109	111	107	107	107	104	103	101	100	99	97	93	90	
2	111	107	104	102	106	101	103	103	101	101	100	99	97	93	90	87	
3	108	103	99	96	102	96	99	94	97	93	90	88	85	82	79	76	
4	104	99	95	92	98	91	96	90	94	90	87	85	82	79	76	74	
5	101	95	91	88	95	88	93	87	91	87	85	82	79	76	74	72	
6	98	92	88	85	92	85	90	84	89	84	82	79	76	73	70	68	
7	96	89	85	82	89	82	88	82	87	81	80	77	74	71	68	66	
8	93	87	83	80	86	80	85	80	85	80	77	74	71	68	65	63	
9	91	84	81	78	84	78	83	77	83	77	74	71	68	65	63	61	
10	89	82	78	76	82	76	81	76	81	76	73	70	68	65	63	61	

Spot beam, 1000lm Engine, 67.8lm/W at 14.0W

Candela Curve

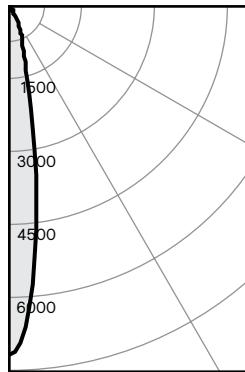

Engine: C2SDL09935SPUOZU

Trim: C2SDLWT

Output lumens: 949 lms

Input watts: 14 W

CRI: 90 min

CCT¹: 3500K

Spacing Crit.: 0.32

Beam Angle: 18°

Zonal summary

Zone	Lumens	%Luminaire
0-30	883	93.0%
0-40	921	97.0%
0-60	939	98.9%
0-90	949	100.0%

Single unit data

Height to lighted plane	Initial center beam foot-candles	Beam diameter (ft)*
5'	228	1.6'
6'	158	1.9'
7'	116	2.2'
8'	89	2.6'
9'	70	2.9'

* Beam diameter is where foot-candles drop to 50% of maximum.

Multiple unit data - RCR 2

Spacing on center	Initial center beam foot-candles	Watts per sq. ft.
5'	45.0	0.62
6'	29.0	0.41
7'	21.0	0.29
8'	17.0	0.24
9'	14.0	0.19

38' x 38' x 10' Room, Workplane 2.5' above floor, 80/50/20% Reflectances

Efficacy: 67.8lm/w

Report²: STMR-3198

Coefficients of utilization

Ceiling	80%				70%				50%				30%				
	70	50	30	10	50	10	50	10	50	10	50	10	50	10	0		
RCR Zonal cavity method - Effective floor reflectance = 20%																	
0	119	119	119	119	116	116	111	111	106	106	101	100	99	97	93	90	
1	115	113	111	109	110	107	107	107	104	103	101	100	99	97	93	90	
2	111	107	104	101	105	100	102	102	100	100	98	99	96	93	90	87	
3	107	102	99	96	101	95	99	99	93	93	96	92	89	86	83	80	
4	104	98	94	91	97	90	95	95	89	89	93	88	86	83	80	78	
5	101	94	90	87	94	87	92	92	86	86	90	85	83	80	77	75	
6	98	91	87	84	90	84	89	89	83	83	88	82	80	78	75	73	
7	95	88	84	81	88	81	86	86	80	80	85	80	78	76	74	72	
8	92	85	81	78	85	78	84	84	78	78	83	78	76	74	72	70	
9	90	83	79	76	82	76	82	82	76	76	81	75	73	71	69	67	
10	87	81	76	74	80	74	80	80	74	74	79	73	71	69	67	65	

© 2025 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.