



PYCC-2U1UNV040S-20C

Selectable Constant Current LED Driver, 0-10V & Phase@120V Dimming

- Input Voltage: 120V - 277V, 50/60Hz
- Dimming Types: 0-10V & Phase@120V
- Dimming Range: 100% - 10%
- Class 2 LED Driver
- cULus Listed, Class P
- Isolated 0-10V from Input and Output
- Selectable Output Current: 250 / 300 / 350 / 400mA
- Output Voltage: 30-42VDC

General Specifications

Input Voltage / Frequency	120V - 277VAC 50/60Hz
Input Current	0.17A Max.
Input Power	22W Max.
Input Power Factor	>0.9
THD	<20%
Driver Type	Current Selectable
Output Voltage Range	30VDC - 42VDC
Selectable Output Current	250mA, 300mA, 350mA, 400mA (±7%) 400±7% means at least 90% load. Others (no specified range), the tolerance of I _{out} is ±10%. , 250±10% is only at least 86% load(36-42V)
Output Power	16.8W Max.
Efficiency load	>84%@120VAC; >82%@277VAC
Output Type	Constant Current
Inrush Current	30A @277VAC
Max. Leakage Current	0.75mA
Total Over All Ripple	<30%
Flicker Percentage	<30%
Dimming Type	0-10V & Phase@120V (see dimmer list)
Dimming Range	100% - 10%
Dimming isolation	Yes
Storage Temperature Range	-40°F ~ 131°F (-40°C ~ 55°C)
Operating Ambient Temperature Range	-22°F ~ 122°F (-30°C ~ 50°C)
Max. Driver Case Temperature	194°F (90°C)
Start Up Time	0.7s @ Full load
Number of Output Channels	1
Overall Size	3.4"x 1.9"x 1.12" (86.4mm x 47.6"mm x 28.5mm)
Weight	0.35lbs (160g)
Wire Type / Length	Input: Black/White 18AWG 160mm/6.3" Output: Red/Blue 20AWG 150mm/ 5.9"; Dimming: Purple/Pink 22AWG 300mm/ 11.8"
Safety / Compliance	cULus Listed, Class P; LED Class 2 CAN/CSA-C22.2 No. 250.13 FCC Title 47 Part 15A
IP Rating	Dry and Damp locations, IP20
Operating Humidity	10-90% RH Non-condensing
Input Surge Protection	C62.41 RingWave 2.5kV
Protections	Over-Voltage Protection Short-Circuit Protection
Sound Rating	A
Service Life	50,000Hrs @Max Load, 75°C Tc
Warranty	5 years @ Tc 75°C from the date of manufacture

General Wiring Diagram




Note: 0-10V and Phase dimming should not use together.




PYCC-2U1UNV040S-20C

Output Current Adjustable


Switch 1	Switch 2	I _{out}
OFF	OFF	400mA
ON	OFF	350mA
OFF	ON	300mA
ON	ON	250mA




400mA



350mA



300mA



250mA

Typical Characteristics Curve

Figure 1

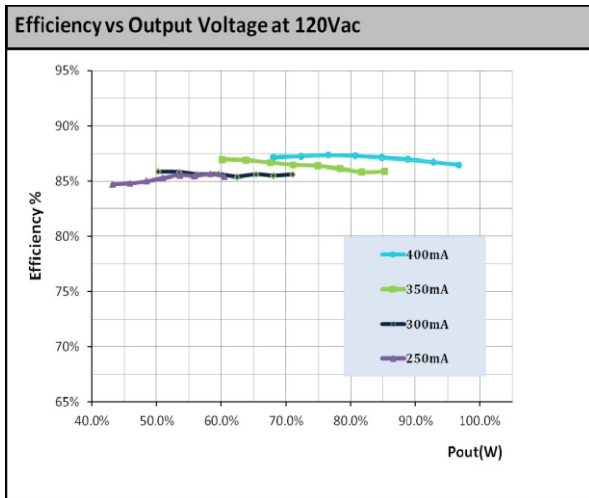


Figure 2

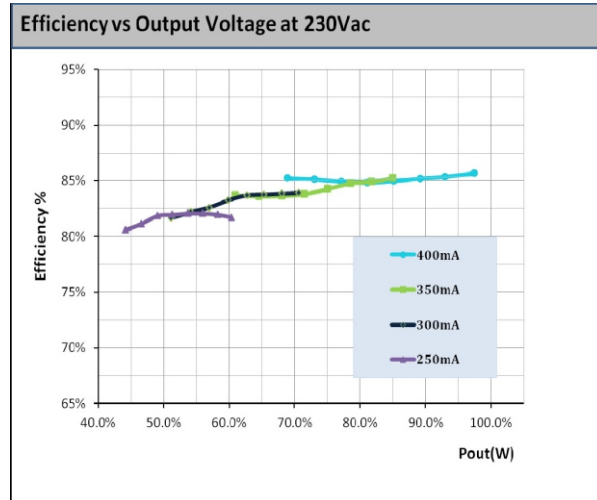


Figure 3


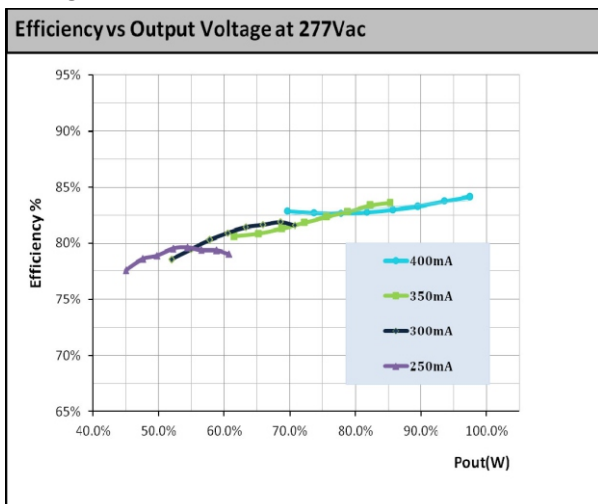


Figure 4



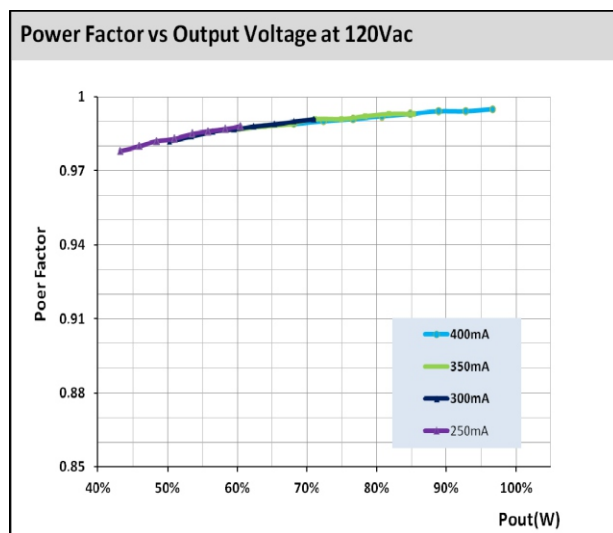

PYCC-2U1UNV040S-20C

Typical Characteristics Curve

Figure 5

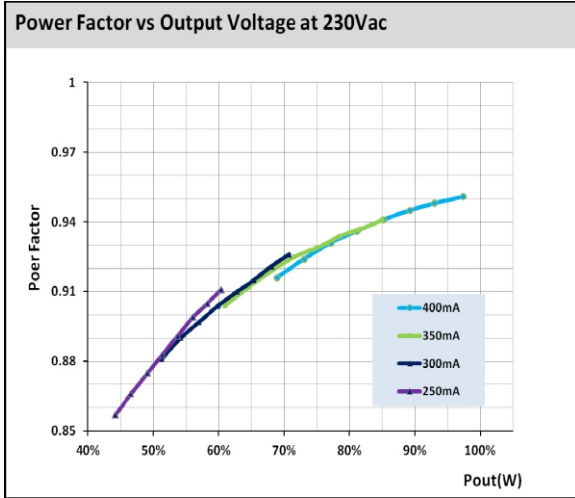


Figure 6

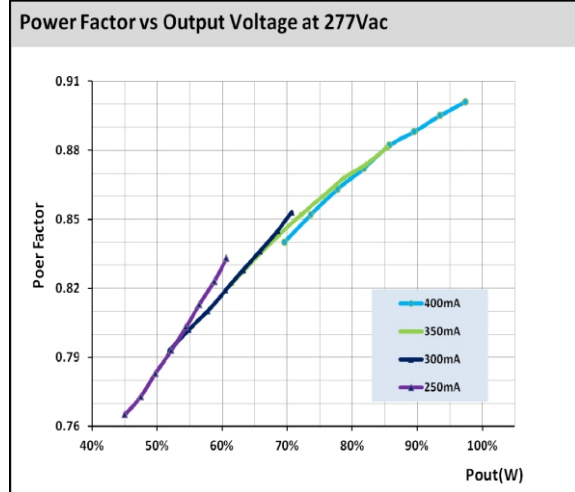


Figure 7

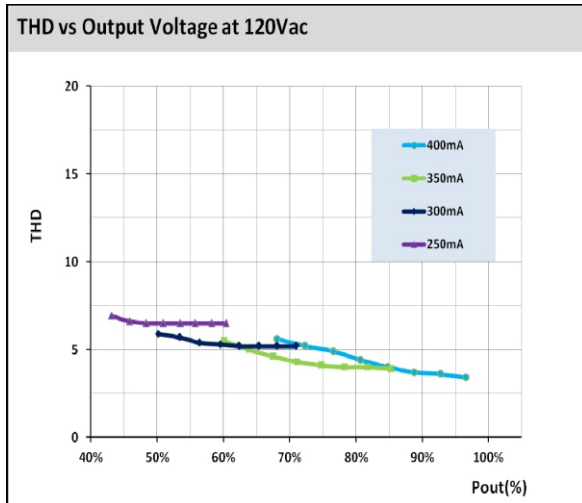


Figure 8

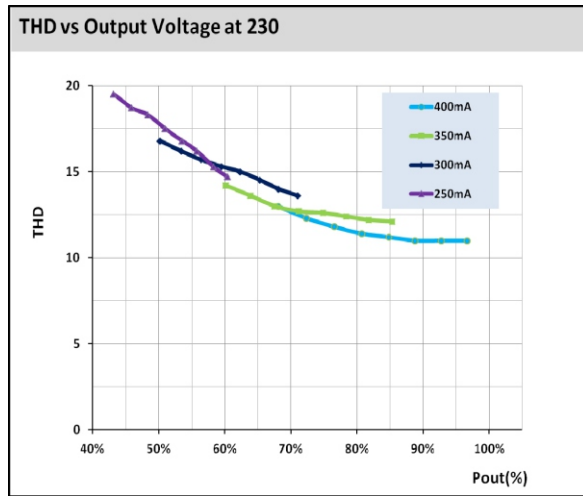


Figure 9


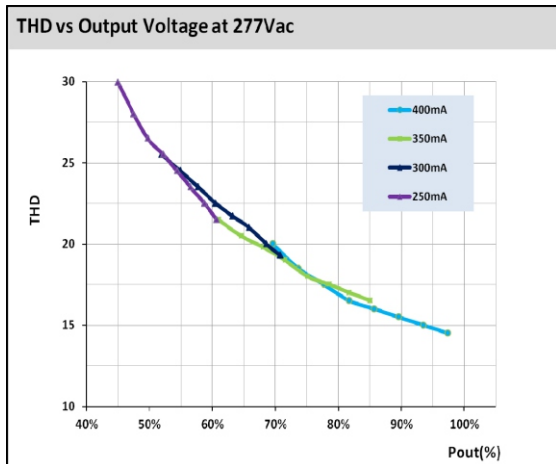


Figure 10



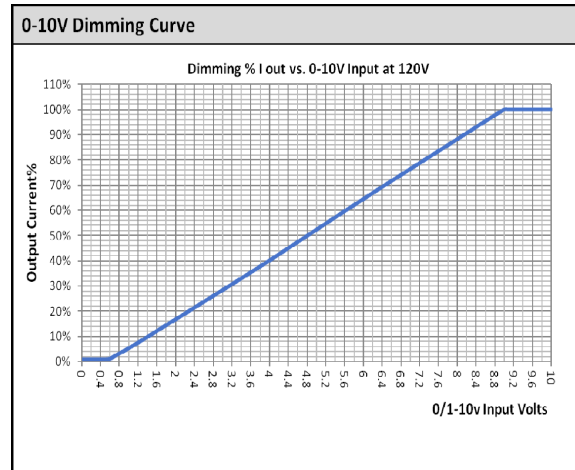

PYCC-2U1UNV040S-20C

Typical Characteristics Curve

Figure 11


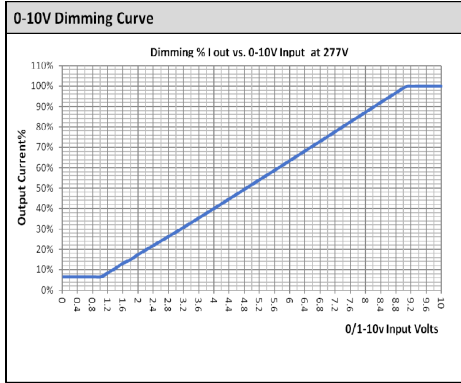



Figure 12

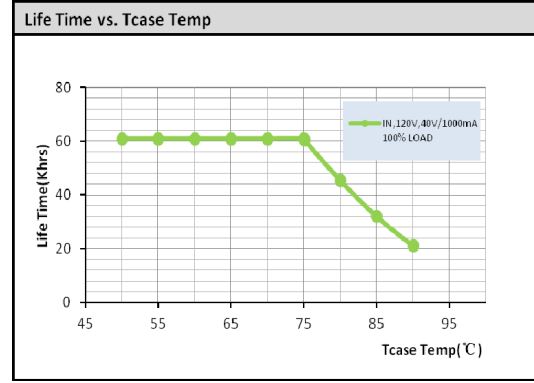


Compatible 120V Phase Dimmer List

Manufacturer	Part Number of Manufacturer	Type of Dimmer	Manufacturer	Part Number of Manufacturer	Type of Dimmer
LUTRON	SCL-153P	TRIAC			
LUTRON	DVCL-153P	TRIAC			
LUTRON	SELV-300P	ELV			
LUTRON	SELV-303P	ELV			
LUTRON	DVELV-300P	ELV			

Mechanical Drawings

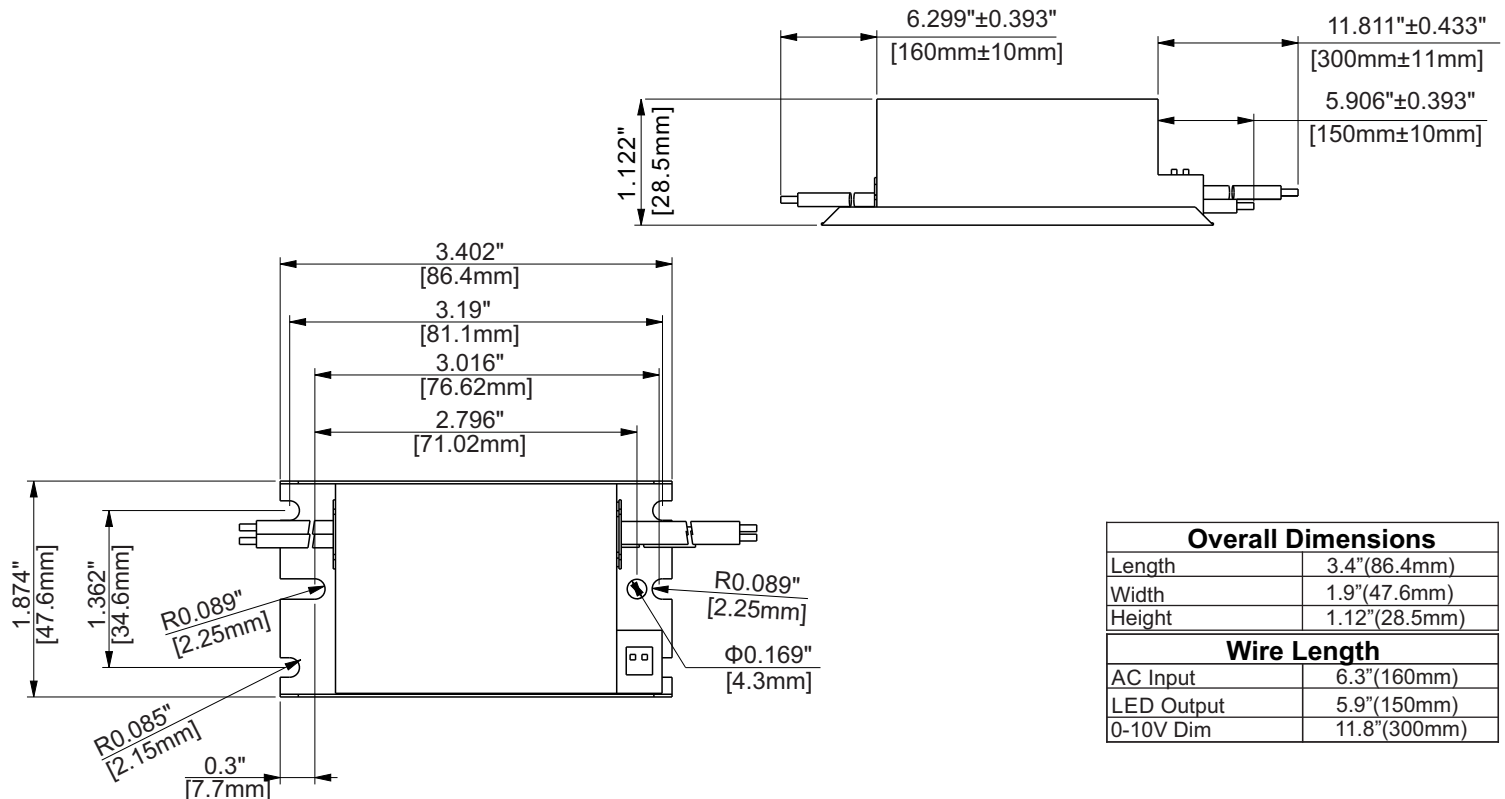



PYCC-2U1UNV040S-20C

Guidelines

Grounding

- Driver must be grounded by means of the Driver case.

LED load

- The Fulham Pony LED drivers are designed to drive passive LEDs, -COB's and -LED assemblies. Proper function is not guaranteed when (LED) loads with active components are used.

Short-circuit protection

- In case of a short circuit the LED driver switches to protection mode. After the removal of the short-circuit the LED driver will recover automatically.

No-load Operation

- In no-load operation the output voltage will not exceed the specified open circuit output voltage.

Hot Swapping

- This driver does not support hot swapping of the LEDs.

Remote Mounting

- Up to 26ft with 18AWG. Contact Fulham for higher remote distance.

Service life/Lifetime

- Failure Rate Info based upon MTBF modeling: 90% survivals at end of life @ $\leq T_c$ lifetime rating.

Warranty

- Reference Fulham's limited Warranty: <https://cdn.fulham.com/PDFs/Limited-Warranty.pdf>


PYCC-2U1UNV040S-20C

Part Number Matrix

PY CC 2 U 1 UNV 040S 20 C


LED Driver	Output Type	# of Control	Type Of Control	# of Output Channels	Input Voltage	Output Current	Max. Output Power	Case Type
PY = Pony LED	CC=Constant Current	2 = 2 Controls	U = 0-10V & Phase	1 = 1 Channel	UNV = 120V~277V	040S = 400/350/300/250mA Selectable	20 = 20W	C = Compact

Product Image

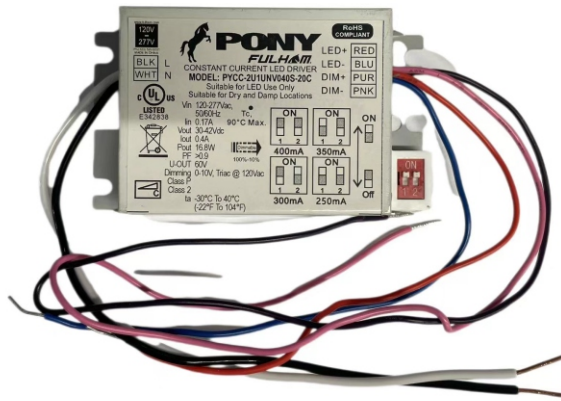

Packaging

Master Carton

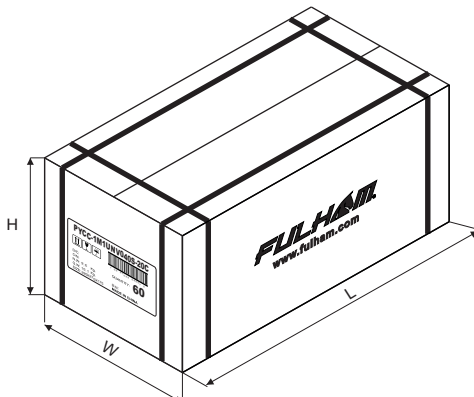

OUTER DIMENSION		
L	W	H
11.42"(290mm)	10.63"(270mm)	6.89"(175mm)
Net Weight	Gross Weight	QUANTITY
21.16lbs. (9.6 kg)	22.27lbs. (10.1 kg)	60pcs.