

12CH DMX DECODER

12V DC / 24V DC

3X4 Channel DMX signal receiver/decoder for use with DMX controllers and low-voltage lighting.

- RJ45, XLR3, or direct wire capable
- 8 Bit or 16 bit PWM output resolution ratio
- 12 total PWM output channels (3 ports x 4 channels)
- Multi-Group DMX RGBW channel control
 - Up to 12 channel max *See drawings on next page*
- 0.1 - 9.9 Gamma value output dimming curve range
- Metal housing with digital display
- Requires master DMX controller and 12-24V DC input for operation (Sold separately)
- 5 Year Warranty


PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:



12-CHANNEL DECODER QUICK SPECS

SERIES	REC-DMX-RJ45A-3X4CH
INPUT VOLTAGE	12 - 24V DC
INPUT CURRENT	20.5A
OUTPUT CURRENT	12 Channel 5A
MAX LOAD	12 x 60-120W
INPUT/OUTPUT SIGNAL	DMX512/RDM
DIMENSIONS	6-1/2"L x 3-7/8"W x 1-1/2"H
STORAGE TEMP	-4°F to 122°F (-20°C to 50°C)
AMBIENT TEMP	-4°F to 122°F (-20°C to 50°C)
OPERATING TEMP	167°F (75°C)
RATING	Dry Location


12-CHANNEL DECODER QUICK DIMENSIONS

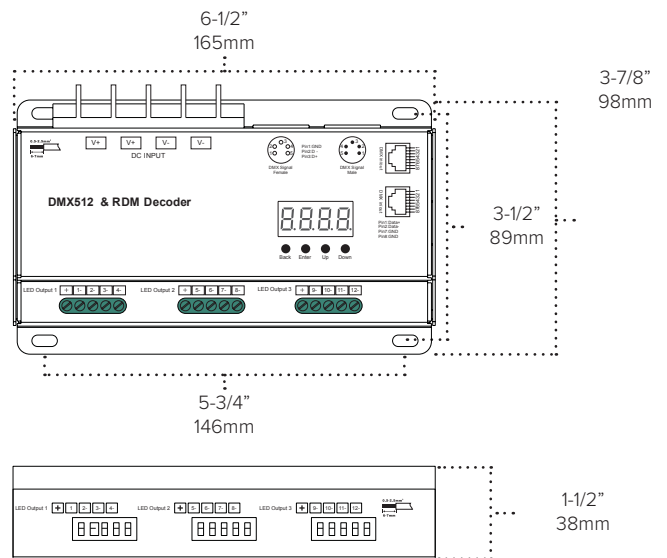


12-CHANNEL DECODER ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION
REC-DMX-RJ45A-3X4CH	12-24V - 3X4 Channel DMX Decoder

12-CHANNEL DECODER PORT INFO

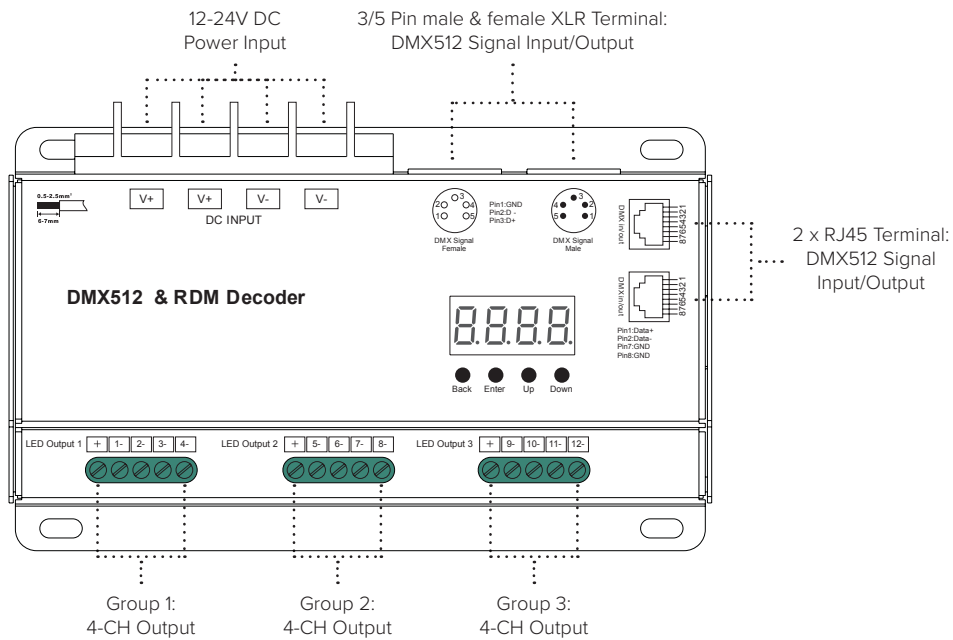

12-CHANNEL DECODER WIRING DIAGRAM

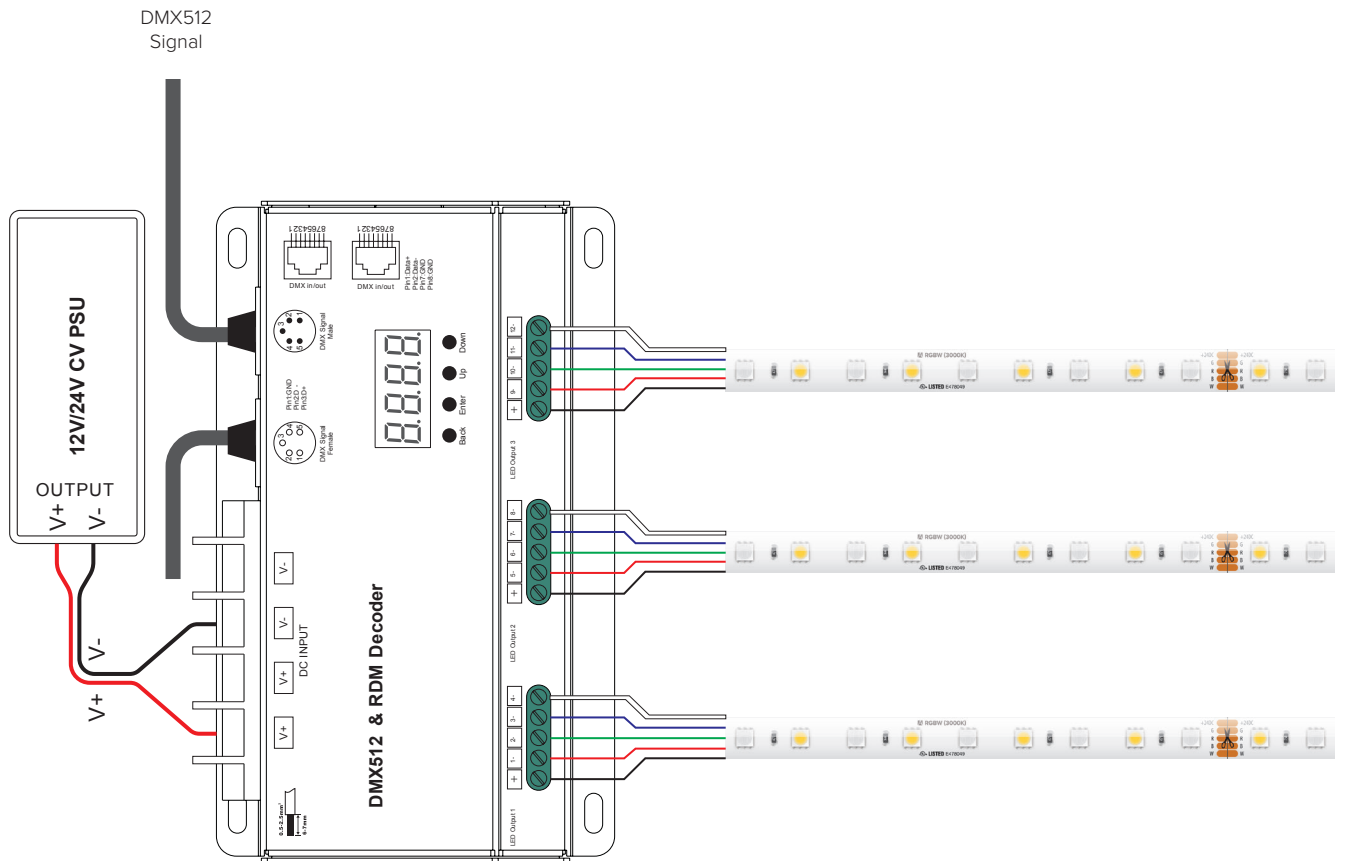



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.