

# ATK-2C

## 2-Circuit Low Profile Extruded Aluminum Track, 2-8 Feet Track & Power Feeds



Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

### Description

Designed for nearly every application and interior environment, the ATK-2C series is an extruded aluminum 2-circuit low profile track for use with A-Line 2-circuit track fixtures. Available in 2', 4', 6' and 8' nominal length.

### Features

#### Extrusion


Constructed of 0.06" extruded aluminum with 0.045" one-piece PVC thermoplastic insulator support holding solid copper 14 gauge round conductors. Polarity groove is located on face of track to assure proper electrical connection. All track sections supplied with two insulated end caps.

#### Mounting

This track is surface mounted using the supplied mounting hardware. Suspended mounting is available with accessories (ordered separately).

#### Labels

cULus listed.

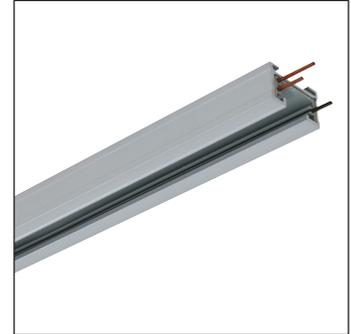



#### Electrical

2-Circuit power distribution system designed to supply lighting unit flexibly. With two (2) hot conductors and one common neutral, each circuit is rated 20A (2 x 20A = 40A max) at 120V. Each circuit allows the control of two individual sets of fixtures, thus enabling the use of two separately switched circuits on one section or run.

#### Compatibility


Track system is compatible with all A-Line® 2-circuit track fixtures, accessories and connectors.

### Technical Drawings

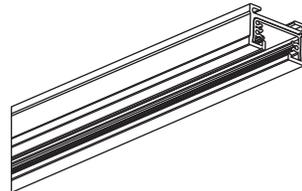

Part No.	Length (Excluding end caps)
ATK02-2C	20-1/8" (511mm)
ATK04-2C	44-1/8" (1121mm)
ATK06-2C	68-1/8" (1730mm)
ATK08-2C	92-1/8" (2340mm)

### Ordering Guide

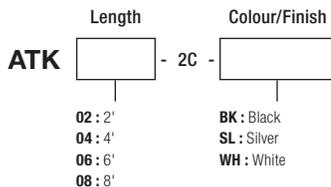

**Notes:** Accessories should be ordered separately. For additional options please consult your A-Line Lighting representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

## Accessories



**ATKC01-2C**  
Two circuit 'I' connector.



**ATKC02-2C**  
Two circuit 'L' and 'I' connector.



**ATKC03-2C**  
Two circuit 'T' connector.



**ATKP04-2C**  
Two circuit 'X' power feed connector.



**ATKP06-2C**  
Two circuit live end conduit feed.



**ATKP09-2C**  
Two circuit live end feed.



**ATKP11-2C**  
Two circuit live end power feed with canopy cover.



**ATKP12-2C**  
Two circuit live end power feed, for T-bar ceiling.



**ATK0-ENDCAP-2C**  
Two circuit track end cap.



**ATKPCL-09-2C**  
Two circuit dual live end canopy current limiter, 1-14 amp options.



**ATKPCL-11-2C**  
Two circuit live end canopy current limiter, 1-14 amp options.



**ATKXW12**  
12" Suspension rod system.



**ATKXW18**  
18" Suspension rod system.



**ATKXW24**  
24" Suspension rod system.



**ATKXW36**  
36" Suspension rod system.



**ATKXW48**  
48" Suspension rod system.



**ATKA250S**  
4¾" Sloped ceiling canopy kit.



**TDR62**  
Stem rod kit to suspend track system from ceiling, 6" ~ 72" options.



**ATK02-2C-PDW1**  
2' Precision Pro Channel, ½" drywall, for two circuit track.



**ATK02-2C-PDW5**  
2' Precision Pro Channel, ⅝" drywall, for two circuit track.



**ATK04-2C-PDW1**  
4' Precision Pro Channel, ½" drywall, for two circuit track.



**ATK04-2C-PDW5**  
4' Precision Pro Channel, ⅝" drywall, for two circuit track.