



LED LAY IN FRAME PANEL - CCT & WATTAGE SELECTABLE 1X4', 2X2', 2X4'




FRAME PANEL IN USE

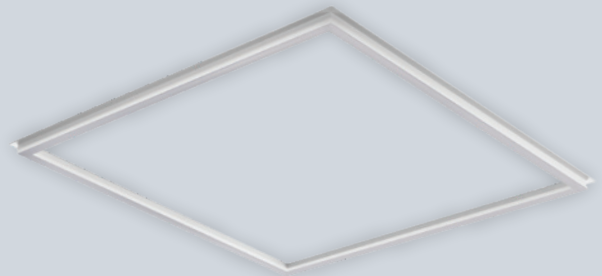


2X2'

20W | 30W | 40W

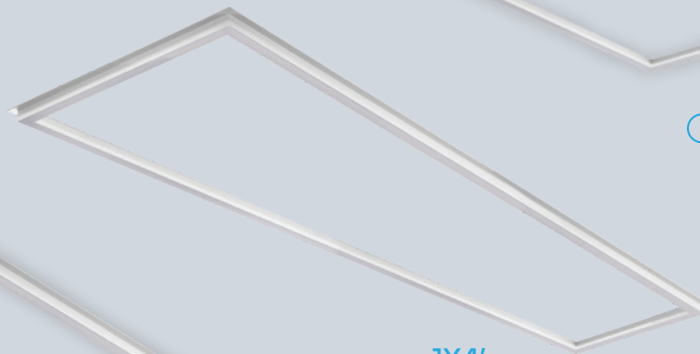


1X4'

20W | 30W | 40W

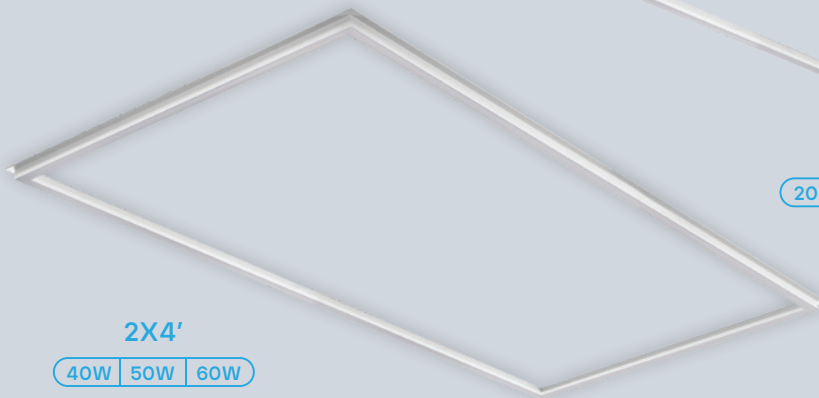

2X4'

40W | 50W | 60W



DRIVER WITH CCT & WATTAGE SELECT SWITCH



COLOR SELECTABLE



3000K | 4000K | 5000K


WATTAGE
SELECTABLE

3 OPTIONS

DIMMABLE

0-10V

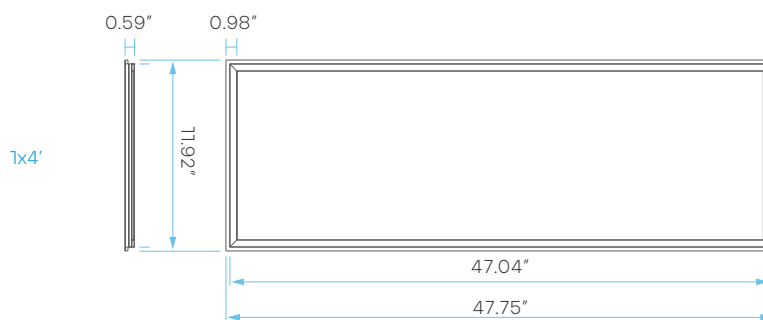

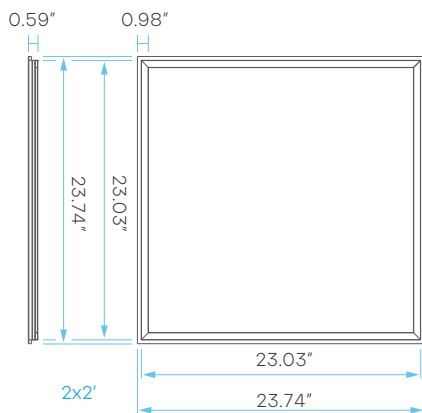

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
1x4'	LR24188	LED1X4FRAME/PNL/3WO/3CCT/D	20	100-277V	125	50,000	\$ 3.61
			30				
			40				
2x2'	LR24185	LED2X2FRAME/PNL/3WO/3CCT/D	20	100-277V	125	50,000	\$ 4.81
			30				
			40				
2x4'	LR24187	LED242FRAME/PNL/3WO/3CCT/D	40	100-277V	125	50,000	\$ 7.22
			50				
			60				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	ETL	DLC
LR24188	LED1X4FRAME/PNL/3WO/3CCT/D	3000K/4000K/5000K	CCT SELECT	2500 (@20W)	120°	80	YES	
				3750 (@30W)				
				5000 (@40W)				
LR24185	LED2X2FRAME/PNL/3WO/3CCT/D	3000K/4000K/5000K	CCT SELECT	2500 (@20W)	120°	80	YES	YES
				3750 (@30W)				
				5000 (@40W)				
LR24187	LED242FRAME/PNL/3WO/3CCT/D	3000K/4000K/5000K	CCT SELECT	5000 (@40W)	120°	80	YES	YES
				6250 (@50W)				
				7500 (@60W)				

COMPATIBLE
WITH:

LR35124
Emergency
LED Driver



LR24183
4' CABLE
EXTENDER



2X2 FRAME PANEL CANOPY

COMPATIBLE WITH LR24185

*SOLD SEPARATELY

MODEL

DESCRIPTION

LR24184

LED2X2FRAME/PNL/CANOPY



FRAME PANEL CANOPY IN USE