

SHADE MINI 4"

4" SHADE MINI LED Light, 500-560 Lumens, 8 Watt, Color Selectable
Commercial Lighting

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

Features

Body

Durable airtight aluminum body with mounting holes. On-face magnets allows for securely attaching a selection of 2-tone, dead front trim/baffle combinations. Available in a variety of color/finish combinations.

LED Characteristics

This general application light fixture features an 8 watt LED module that maintains uniform intensity producing up to 560 lumens; with a typical CRI of 90. Available with 5 step CCT switch (2700 K, 3000 K, 3500 K, 4000 K, 5000 K).

Dimming

100%-10% dimming capability. This fixture is compatible with industry standard forward/reverse phase dimmers, TRIAC/ELV dimmers. For compatible dimmers, visit www.liteline.com/SHADEMINI

Beam Spread

The fixture lens provides 100° beam spread.

Mounting

Attached to an industry standard 4" octagon boxes with minimum depth of 1.5" (38mm) via mounting holes. See below for appropriate spacing requirements.

LED Driver

Built-in on board driver with 40mA output and 100-135V AC input.

Quick Connect push-in terminals

"Quick connect" push-in terminals for fast and easy wiring.

Operating Temperature

-30°C~40°C (-22°F~104°F)


Environment

- Suitable for wet locations.
- Fire-rated when used in a steel octagon box.

SPECIFICATION


Application	Recessed / Surface-mount Downlight
Approved Location	Wet
Beam Angle	100°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K
Certification	cETLus
Color options (Trim)	Black / White
Color options (Baffle)	Black / White / Specular / Semi-Specular / Matte Gold
CRI	90
Dimming	Yes
Dimming Tech	Forward/Reverse phase / TRIAC/ELV
Energy Star	Yes
Input	100-135V AC, 60Hz
LM79	Yes
LM80	Yes
Lumens	Up to 560
Lumens per Watt	Up to 70
Power Factor	0.9
Projected Life	70% @ 50,000 hrs
Title 24	Yes (up to 4000 K)
Warranty	5-Year
Wattage	8W

CCT	Lumens
2700 K	500
3000 K	500
3500 K	520
4000 K	540
5000 K	560

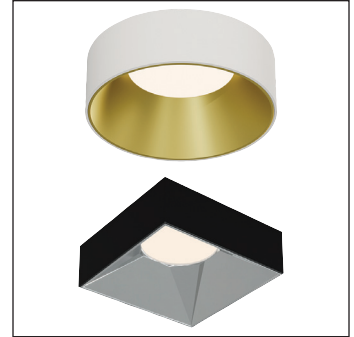


Description


The 4" SHADE MINI is an 8 watt 4" round downlight for retrofit application onto 4" octagon box. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy-efficiency and streamlined design. Suitable for wet locations.

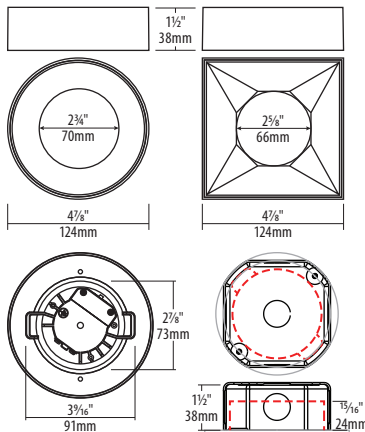

Mounting

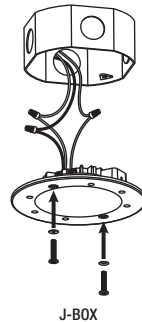

Ordering Guide

Form	Trim Color	Baffle Color
SH-F4I	C -	
<div> <div>  <p>Highlighted option denotes QuickShip.</p> </div> <div> <p>Leave blank for round</p> <p>S : Square</p> </div> </div>	<div> <div>B : Black¹</div> <div>W : White²</div> </div>	<div> <div>B : Black</div> <div>G : Gold</div> <div>S : Specular</div> <div>SS : Semi-Specular</div> <div>W : White</div> </div>



Notes:

* Title 24 is only available for up to 4000 K. ¹ Not available with White baffle. ² Not available with Black baffle.
QuickShip option is available on orders of 100 pieces or less, and will ship within 2 business days. Options must be selected from highlighted QuickShip section to qualify. Accessories are sold separately. For additional options please consult your Liteline representative.
Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Accessories



LC-CRTL-3WAY-1

OnCloud Smart Wi-Fi 3-way switch. Suitable for 3-way or 4-way switch applications.



LC-CRTL-DIM-1

OnCloud Smart Wi-Fi dimmer. Features an ON/OFF press and a 7 level touch slider.



SLMT4-CBPLT

Concrete box mounting plate kit, for SLIMLED MULTI.



SLMT4-SCREWS

1.5" Replacement screws (pack of 10), can be used for large gaps between ceiling material and junction box.

Dead-front Trim/Baffle Combinations


Round




Black / Black



Black / Gold




Black / Specular




Black / Semi-Specular



White / Gold



White / Specular




White / Semi-Specular




White / White


Square




Black / Black




Black / Gold




Black / Specular




Black / Semi-Specular



White / Gold



White / Specular



White / Semi-Specular



White / White