

KT-EM-RX1-XX-WL-SL

EMERGENCY LIGHT

DESCRIPTION

Emergency Light | Single or Dual Heads |
White or Black Finish | 6500K White Light | Surface Mount |
Low Voltage Input

APPLICATION

UL 924 Compliant Emergency Light Remote Head Rated for
Damp Locations.



PRODUCT FEATURES

- 6500K White Light Single or Dual Heads
- Surface Mount - Back
- Thermoplastic Housing - UL 94 5VA Flame Rating
- Ambient Operating Temperature: 0°C/32°F to 40°C/104°F
- UL Certified for Damp Locations

PERFORMANCE SPECIFICATIONS

Catalog Number	Input Voltage	Input Power	CCT	Lumens	Housing Color	Mounting
KT-EM-RS1-WHWL-SL	Low Voltage - 3.6-15 Vdc	Max 1.2W	6500K	100	White	Surface: Back Mount
KT-EM-RD1-WHWL-SL		Max 2.4W		200		
KT-EM-RS1-BLWL-SL		Max 1.2W		100	Black	
KT-EM-RD1-BLWL-SL		Max 2.4W		200		

* See Ordering Information and Catalog Number Breakdown for more details.

PHYSICAL SPECIFICATIONS

SINGLE HEAD

Weight


Fixture Weight	Carton Weight
0.5 lbs	7.5 lbs

KT-EM-RX1-XX-WL-SL

EMERGENCY LIGHT

PHYSICAL SPECIFICATIONS (CONTINUED)

DUAL HEAD

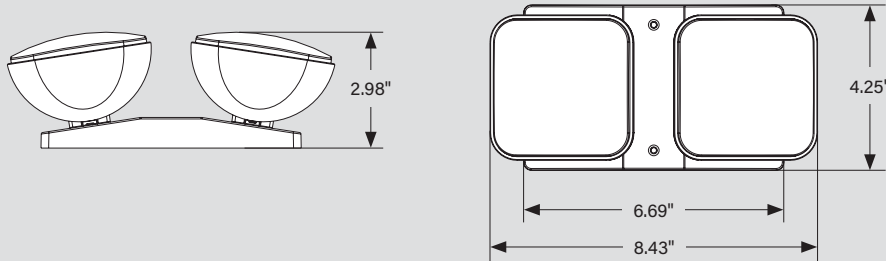

Weight

Fixture Weight	Carton Weight
0.8 lbs	12.2 lbs

ORDERING INFORMATION

Catalog Number	Heads	Finish	UPC	Easy Code
KT-EM-RS1-WHWL-SL	Single	White	843654165165	PLL-90
KT-EM-RD1-WHWL-SL	Dual		843654165172	RIC-61
KT-EM-RS1-BLWL-SL	Single	Black	843654165189	BJN-86
KT-EM-RD1-BLWL-SL	Dual		843654165196	DLX-54

CATALOG NUMBER BREAKDOWN

KT-EM-RX1-XXWL-SL

1 2 3 4 5 6 7 8

1 Keystone Technologies

2 Emergency Light

3 Remote Head

4 Form Factor 1

5 Housing Color

6 Light Color

7 Mounting

8 Input Voltage

3 Remote Head

RS	Remote Single Head
RD	Remote Dual Head

5 Housing Color

WH	White
BL	Black

6 Light Color

WL	White Light
----	-------------

7 Mounting

S	Surface Mount
---	---------------

8 Input Voltage

L	Low Voltage
---	-------------