



# Low Voltage: Path Lights (Spot Style)

## Solid Brass – Architectural Models



**Detail Specifications:**

- Finish: Oil Rubbed Bronze or Matte Black
- Housing: Corrosion Resistant Solid Brass
- Lamp Type:
  - G4 Bulbs 12V (not included)
  - 35W Halogen Max
  - LED bulbs available
- IP Rating: Wet Location IP65
- Lens: Clear glass

**Applications:**

- Landscape
- Walkways & Pathways
- Security Lighting
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial

**Product Information:**

- Heat resistant glass lens
- Water tight silicone ring for waterproofing
- Stem Options: 22" Height
- Packaging: Retail color box
- Master Box Quantity: 10pcs.

**Driver Options:**

- Compatible with 12V Low Voltage Drivers

**Mounting & Installations:**

- Wire: 6' (72") SPT-1W 18 gauge wire lead
- Spike: 8.3" Non-metallic spike included
  - Optional brass spike available
- Sold brass pipe with 1/2" knuckle stem

**Warranty:**

- Lifetime Anti-Corrosion Warranty

*Fixtures*

**PL-S-24-BR-ORB-12V**  
 Oil Rubbed Bronze  
**PL-S-24-BR-MBL-12V**  
 Matte Black

*1 Bulb Options*

**LED-G4WP-1.5W-SW**  
 2700K  
**LED-G4WP-1.5W-WW**  
 3000K  
**LED-G4WP-1.5W-CW**  
 4000K  
**LED-G4WP-2.5W-SW**  
 2700K  
**LED-G4WP-2.5W-WW**  
 3000K  
**LED-G4WP-2.5W-CW**  
 4000K  
**LED-G4WP-3.5W-SW**  
 2700K  
**LED-G4WP-3.5W-WW**  
 3000K  
**LED-G4WP-3.5W-CW**  
 4000K


*Optional Accessories on Page 3*

*Specs and model numbers are subject to change with or without notice. Customization of product is available.*

**FEATURES**



**DIMENSIONS**

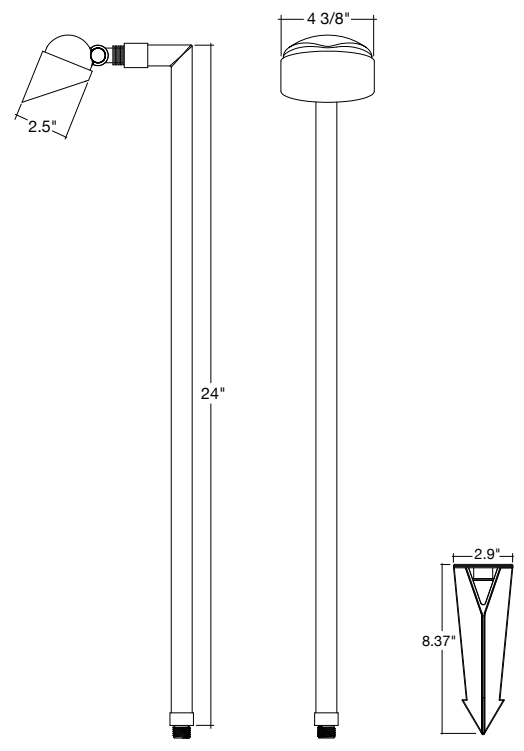



LED-G4WP-1.5W-SW  
LED-G4WP-1.5W-WW  
LED-G4WP-1.5W-CW



LED-G4WP-2.5W-SW  
LED-G4WP-2.5W-WW  
LED-G4WP-2.5W-CW



LED-G4WP-3.5W-SW  
LED-G4WP-3.5W-WW  
LED-G4WP-3.5W-CW



STK-HD-1/2-BR



SM-1/2-BR-ORB



SM-1/2-BR-MBL



SM-1/2-ALM-BZ




SM-1/2-ALM-BL



SM3-1/2-BR-ORB



SM3-1/2-BR-MBL



STKC-1/2-BR-ORB



STKC-1/2-BR-MBL



PL-AT-1/2-ALM-BZ



PL-AT-1/2-ALM-BL

Model	Voltage	Color
PL-S-24-BR-ORB-12V	12V	Oil Rubbed Bronze
PL-S-24-BR-MBL-12V	12V	Matte Black

### BULBS

Model	Voltage	Watts	Lumens	Color
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k

### STAKE

Model	Voltage
STK-HD-1/2-BR	Brass Stake 10" Heavy Duty

### SURFACE MOUNT

Model	Description
SM-1/2-BR-ORB	Brass Stake 10" Heavy Duty (Oil Rubber Bronze)
SM-1/2-BR-MBL	Brass 1/2" Surface Mount (Matte Black)
SM-1/2-ALM-BZ	Aluminum 1/2" Surface Mount (Bronze)
SM-1/2-ALM-BL	Aluminum 1/2" Surface Mount (Black)

### TREE MOUNT

Model	Description
SM3-1/2-BR-ORB	Brass Stake 10" Heavy Duty (Oil Rubber Bronze)
SM3-1/2-BR-MBL	Brass 1/2" Surface Mount (Matte Black)

### STAKE COVER

Model	Description
STKC-1/2-BR-ORB	Brass Stake Cover(Oil Rubbed Bronze)
STKC-1/2-BR-MBL	Brass Stake Cover(Matte Black)

### PATH LIGHT COVER

Model	Description
PL-AT-1/2-ALM-BZ	Path Light Cover (Bronze)
PL-AT-1/2-ALM-BL	Path Light Cover (Black)