
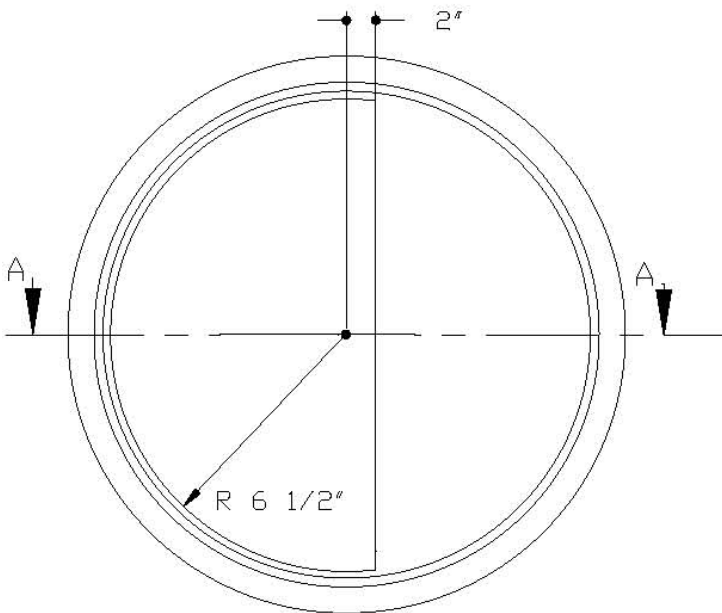



MODEL FF109X

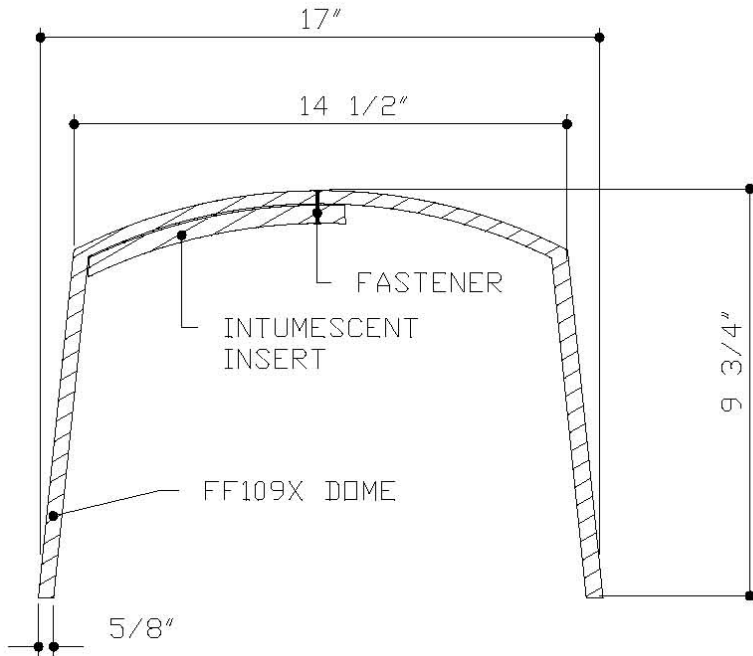

Model Number	Inside Height	Outside Diameter
FF109X	8"	17"
Performance Data		
For Use: <ul style="list-style-type: none"> UL Classified to maintain fire ratings of up to two hours for the following fire-rated floor/ceiling assemblies: L500, D500, G500, D200, G200, J200 and L200 series UL Classified to maintain fire ratings of up to one hour for the following roof/ceiling assemblies (attics): P200 and P500 series 		
		
General Information		
Benefits: <ul style="list-style-type: none"> 120 minute protection Fits most popular IC rated fixtures For joist spacing up to 24" on center Suitable for 2"x10", 2"x12", 2"x14", and 2"x16" joists Can be used in floor/ceiling, as well as roof/ceiling assemblies (attic) Lightweight (approx. 1.5 lbs) Easy Installation—can be fitted in seconds—no screws, drilling or additional sealant required Enhances the acoustic protection of the ceiling Reduces heat loss through the fixture Maintenance free 		
Manufactured By		
Tenmat Inc 23 Copper Drive Newport, DE 19804 Phone: (302) 633-6600 Fax: (302) 633-6838 Email: info@tenmatusa.com www.TenmatUSA.com		