

LED SURFACE MOUNT SLIM LINEAR FIXTURE - CCT & WATTAGE SELECTABLE 24", 48", 96"



QUICK RELEASE
BUTTON

24"

LR25223

15W | 20W | 25W

48"

LR25225

20W | 30W | 40W

96"

LR25227

50W | 64W | 80W

COMPATIBLE WITH



SUSPENSION KIT
LR25229

EMERGENCY + MOTION SENSOR
OPTION ALSO AVAILABLE

LR25223+MS

15W | 20W | 25W



LR25225+MS

20W | 30W | 40W



LR25227+MS

50W | 64W | 80W

BI-LEVEL MOTION SENSOR
DIP SWITCH

LR25225+EM+MS

20W | 30W | 40W



LR25227+EM+MS

50W | 64W | 80W

TEST BUTTON



COLOR SELECTABLE

3500K | 4000K | 5000K

WATTAGE
SELECTABLE

3 OPTIONS

DIMMABLE

0-10V



*OPTION
AVAILABLE



*OPTION
AVAILABLE



HIGH
OUTPUT



ELECTRICAL

MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	EMERGENCY TIME	MOTION SENSOR
24"	LR25223	LED24/LINEAR/3CCT/3WO/UNV/D/HO/V2	15	100-277V	130	50,000	
			20				
			25				
24"	LR25223+MS	LED24/LINEAR/3CCT/3WO/UNV/D/HO/V2+MS	15	100-277V	130	50,000	BI-LEVEL
			20				
			25				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	UL LISTED	DLC
LR25223	LED24/LINEAR/3CCT/3WO/UNV/D/HO/V2	3500K	CCT SELECT	1950	120°	80	YES	S-C6GP38
		4000K		2600				
		5000K		3250				
LR25223+MS	LED24/LINEAR/3CCT/3WO/UNV/D/HO/V2+MS	3500K	CCT SELECT	1950	120°	80	YES	S-C6GP38
		4000K		2600				
		5000K		3250				

LR25223+MS WORKS WITH

*SOLD SEPARATELY

LR25224
MS REMOTE




LR25224
LED24/LINEAR/MS/REMOTE2
MS REMOTE

SPECIFICATIONS

Power supply	2 x AAA 1.5V battery
Upload range	Up to 15m (50 ft.)
Op. temperature	0°C~50°C (32°F~122°F)
Dimensions	123x70x20.3mm (4.84" x2.76" x0.8")

DIMENSIONS

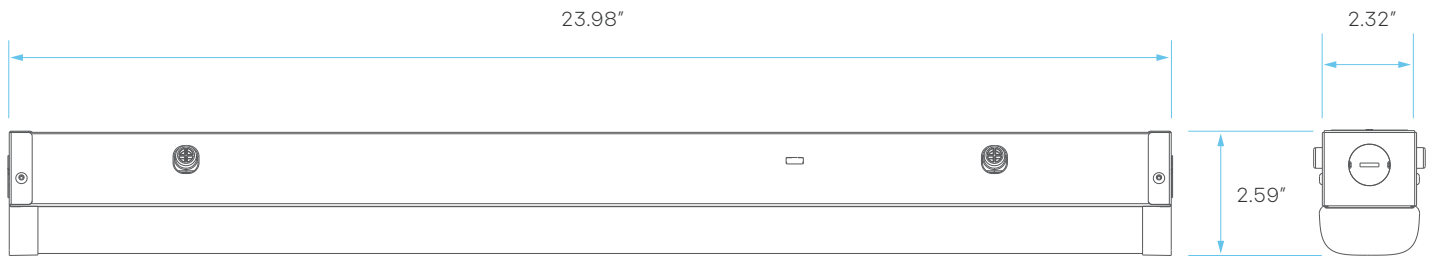

24"


ELECTRICAL

MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	EMERGENCY TIME	MOTION SENSOR	
48"	LR25225	20	120-277V	130	50,000			
		30						
		40						
	LR25225+EM	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2+EM	20	120-277V	130	50,000	90 MINS	
			30					
			40					
	LR25225+EM+MS	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2+EMS	20	120-277V	130	50,000	90 MINS	BI-LEVEL
			30					
			40					
	LR25225+MS	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2+MS	20	120-277V	130	50,000		BI-LEVEL
			30					
			40					

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	UL	DLC
LR25225	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2	3500K	CCT SELECT	2600	120°	80	YES	S-GBVP20
		4000K		3900				
		5000K		5200				
LR25225+EM	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2+EM	3500K	CCT SELECT	2600	120°	80	YES	S-GBVP20
		4000K		3900				
		5000K		5200				
LR25225+EM+MS	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2+EMS	3500K	CCT SELECT	2600	120°	80	YES	S-GBVP20
		4000K		3900				
		5000K		5200				
LR25225+MS	LED48/LINEAR/3CCT/3WO/UNV/D/HO/V2+MS	3500K	CCT SELECT	2600	120°	80	YES	S-GBVP20
		4000K		3900				
		5000K		5200				

DIMENSIONS

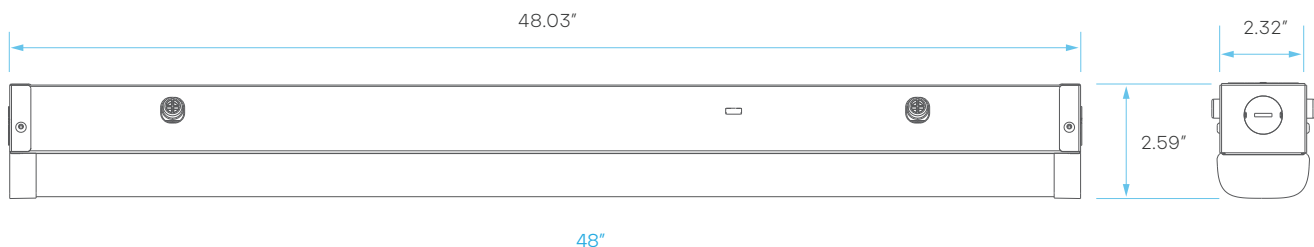


ELECTRICAL

MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	EMERGENCY TIME	MOTION SENSOR
96"	LR25227	50	100-277V	130	50,000		
		64					
		80					
LR25227+EM	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2+EM	50	100-277V	130	50,000	90 MINS	
		64					
		80					
LR25227+EM+MS	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2+EMS	50	100-277V	130	50,000	90 MINS	BI-LEVEL
		64					
		80					
LR25227+MS	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2+MS	50	100-277V	130	50,000		BI-LEVEL
		64					
		80					


PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	UL LISTED	DLC
LR25227	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2	3500K	CCT SELECT	6500	120°	80	YES	S-NG2PCY
		4000K		8320				
		5000K		10400				
LR25227+EM	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2+EM	3500K	CCT SELECT	6500	120°	80	YES	S-NG2PCY
		4000K		8320				
		5000K		10400				
LR25227+EM+MS	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2+EMS	3500K	CCT SELECT	6500	120°	80	YES	S-NG2PCY
		4000K		8320				
		5000K		10400				
LR25227+MS	LED96/LINEAR/3CCT/3WO/UNV/D/HO/V2+MS	3500K	CCT SELECT	6500	120°	80	YES	S-NG2PCY
		4000K		8320				
		5000K		10400				


DIMENSIONS

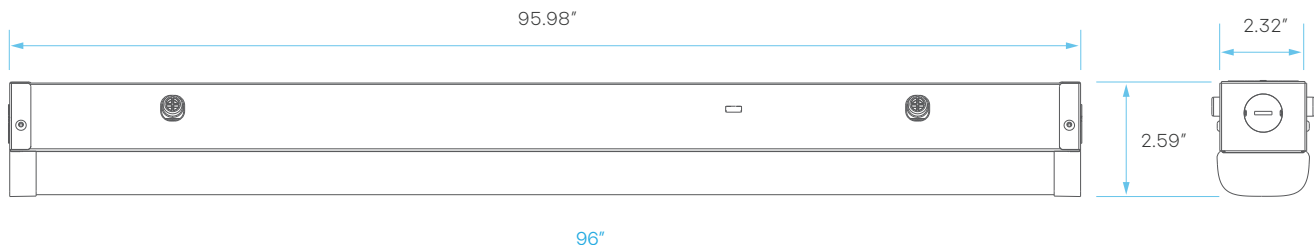


WIRING

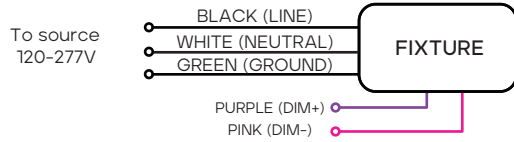

CCT & WATTAGE SELECT SWITCH

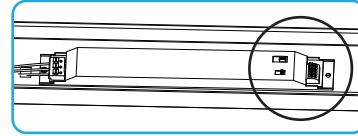

BI-LEVEL MOTION SENSOR SETTINGS & PARAMETERS *INTEGRAL

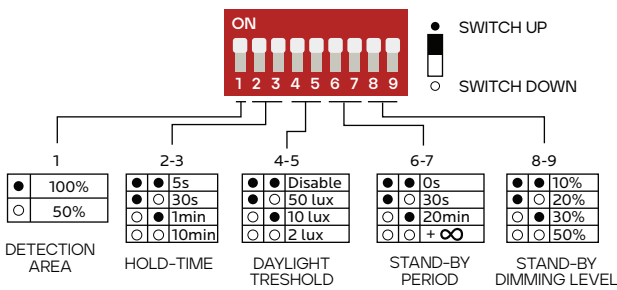

SPECIFICATIONS

POWER SUPPLY	12V-24V DC, >50mA
HF SYSTEM	5.8GHz±75MHz
DIM CONTROL OUTPUT	0-10V, max. 25mA sinking current
DETECTION RADIUS/ANGLE	Max 17ft.(5.2m)/360°
MOUNTING HEIGHT	Max 25ft(7.7m)
REMOTE RANGE	50ft. (15m) indoor, no backlight
HUMIDITY	Max. 95% RH
TEMPERATURE	-40°F ~ 158°F (-40°C ~ 70°C)



LR35120, LR35121 - SPECIFICATIONS

MODEL	DESCRIPTION	EM POWER	INPUT VOLTS	FREQUENCY	INPUT CURRENT	INPUT POWER	OUTPUT VOLTAGE	RECHARGE TIME	EMERGENCY TIME
LR35120	LED/EMR/8W/DC	8	100-277V	50/60Hz	100mA	7W max	25-48VDC	24Hr	90min
LR35121	LED/EMR/15W/DC	15	100-277V	50/60Hz	100mA	7W max	25-48VDC	24Hr	90min

AMBIENT TEMPERATURE: 32°F ~ 104°F

LR35120, LR35121 - WIRING DIAGRAM

