

LED SURFACE MOUNT SLIM SERIES - ADJUSTABLE BI-LEVEL PIR & PHOTOCELL SENSOR 7", 9", 12", 15"



7"




9"



12"




15"

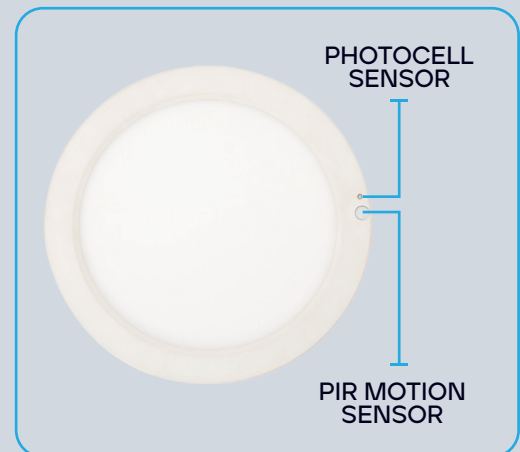

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
7"	LR23565	LED15/SLIM7/5CCT/W/RD/Bi/PIR/PC	15	120V	75	50,000	\$ 1.80
9"	LR23566	LED18/SLIM9/5CCT/W/RD/Bi/PIR/PC	18	120V	75	50,000	\$ 2.16
12"	LR23567	LED24/SLIM12/5CCT/W/RD/Bi/PIR/PC	24	120V	75	50,000	\$ 2.89
15"	LR23568	LED30/SLIM15/5CCT/W/RD/Bi/PIR/PC	30	120V	75	50,000	\$ 3.61

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	ETL	ENERGY STAR
LR23565	LED15/SLIM7/5CCT/W/RD/Bi/PIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1050	110°	90	YES	YES
LR23566	LED18/SLIM9/5CCT/W/RD/Bi/PIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1500	110°	90	YES	YES
LR23567	LED24/SLIM12/5CCT/W/RD/Bi/PIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2000	110°	90	YES	
LR23568	LED30/SLIM15/5CCT/W/RD/Bi/PIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2250	110°	90	YES	

12" EMERGENCY BATTERY BACKUP



LR23648

LED24/SLIM12/RD/Bi/EMPK
POWER 24W
*SOLD SEPARATELY

COMPATIBLE WITH:
LR23567

12" BRACKET



LR23648B

LED/24/SLIM12/RD/Bi/EMPK/EMPTY
*SOLD SEPARATELY

COMPATIBLE WITH:
LR23567

15" EMERGENCY BATTERY BACKUP



LR23647

LED30/SLIM15/RD/EMPK
POWER 30W
*SOLD SEPARATELY

COMPATIBLE WITH:
LR23568

15" BRACKET



LR23647B


LED30/SLIM15/RD/EMPK/EMPTY
*SOLD SEPARATELY

COMPATIBLE WITH:
LR23568

MOTION SENSOR SETTINGS

PIR MS FUNCTION

Not Detected Delay 0.5 min/ 3min/5min.
Not Detected Approx.30%




30S/3M/5M
sensor duration
time setting

PHOTOCELL FUNCTION

Night Mode(Ambient Light ≤ 50lm)


Detected 100% Output
Not Detected Approx.30%



Daylight sensor
time switch

ALL DAY

Not Detected Delay 0.5min/ 3min/5min 100% Output
Approx.30% Output

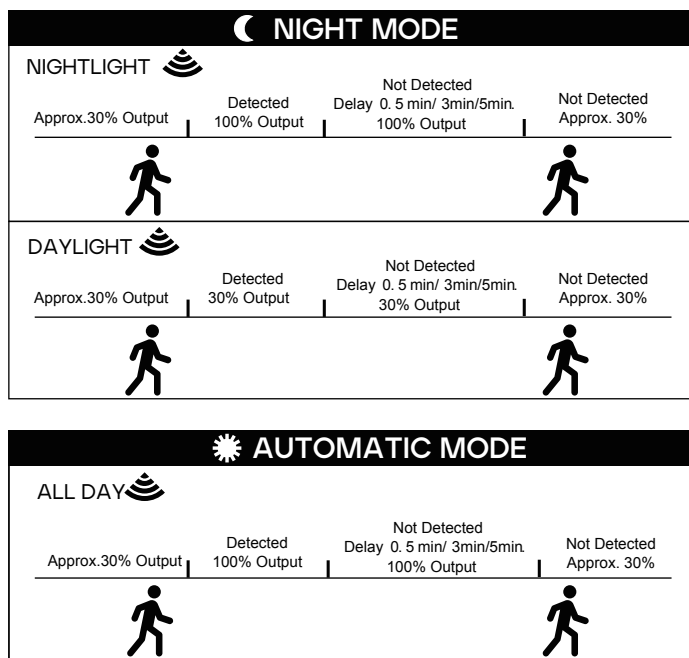

DIMENSIONS

