


## LED ARCHITECTURAL LINKABLE LINEAR - T-GRID KIT LR42639

### IMPORTANT SAFETY INSTRUCTIONS


1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.

5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.
8. DO NOT use outdoors.

### BOX CONTENTS

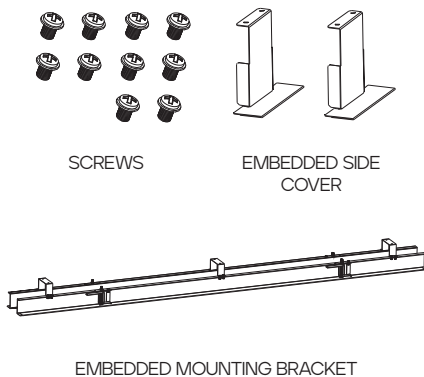

### CAUTION BEFORE INSTALLATION

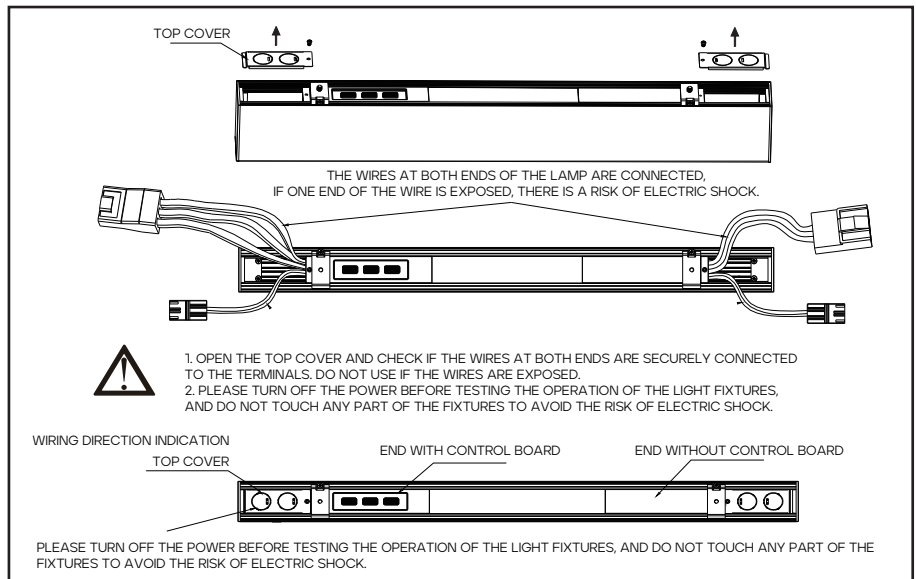


### INSTRUCTIONS

#### 1. Precautions before installation.


When unsure of the stability of the installation surface, please use a safety rope for protection. Verify the stability of surface for safety rope before proceeding with the installation to prevent any potential falls.

NOTE:


1. This mounting kit is suitable for walls with a thickness of 3-30mm. Please check if the mounting surface is firm and capable of bearing the weight of the fixture before installation. Do not install in flammable environments.
2. Check the mounting kit for any damage before installation. Make sure to disconnect the power supply before installation.

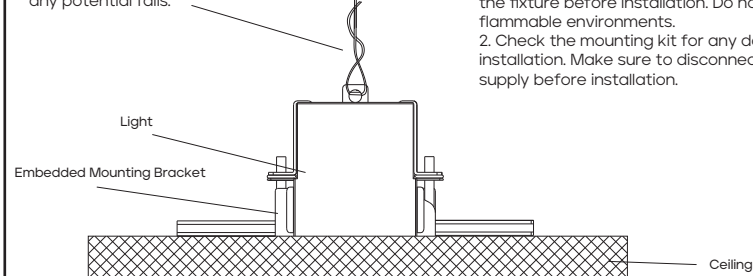

#### 2. Reserve installation holes in the ceiling.

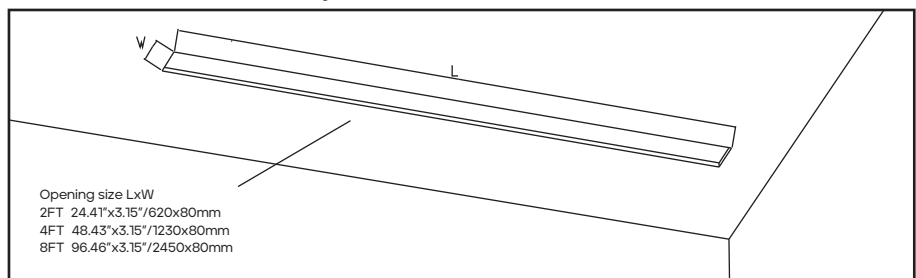


### WIRING

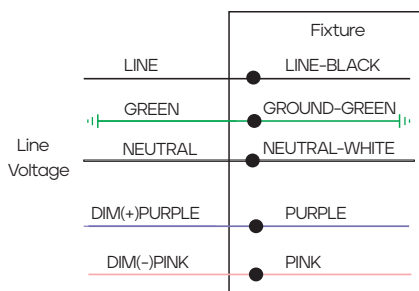


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


3. Remove the rubber plugs from the embedded mounting bracket, then fit the embedded mounting bracket onto the fixture.

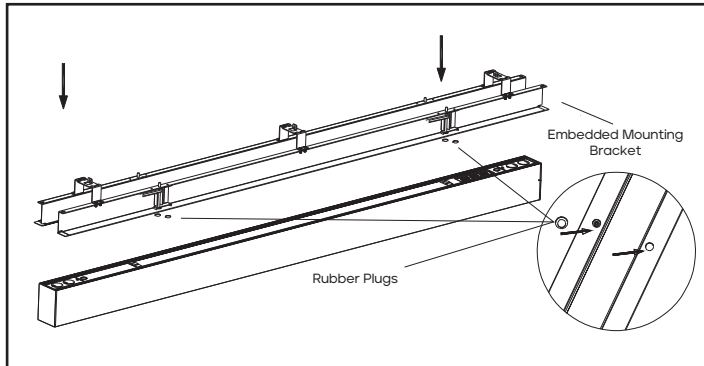

4. Put on the embedded side cover.

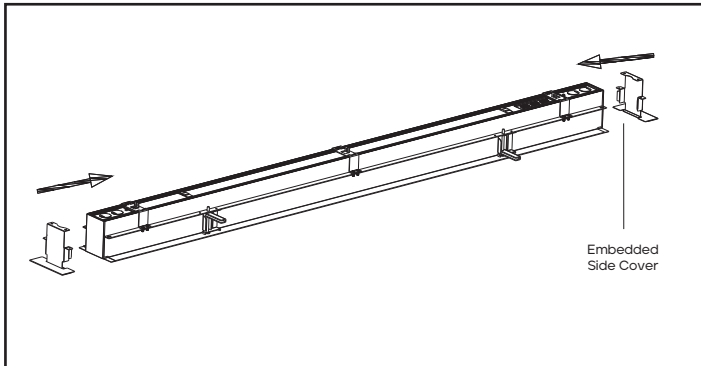


5. Fix the fixture onto the embedded mounting bracket with screws.

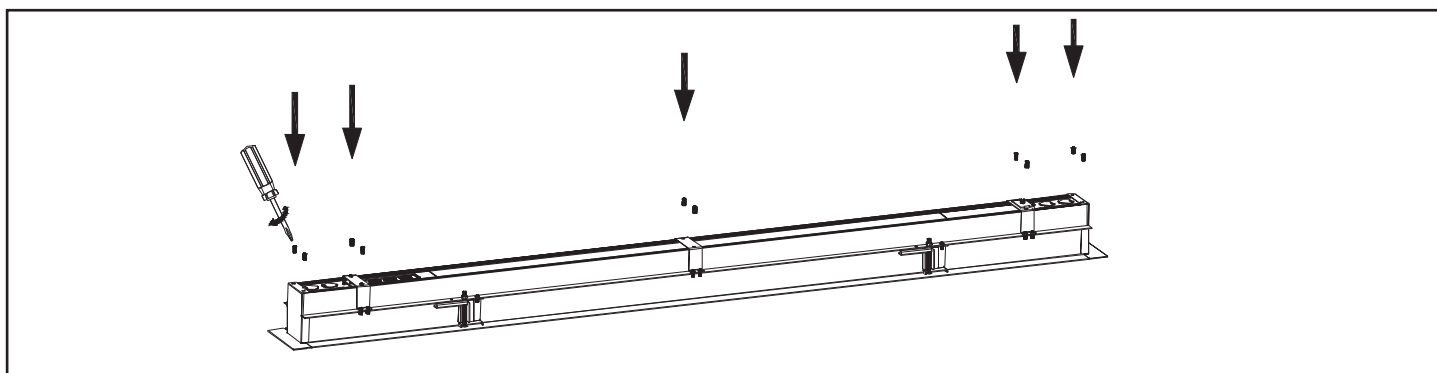

## WIRING


| Line Voltage |  | Fixture       |
|--------------|--|---------------|
| LINE         |  | LINE-BLACK    |
| GREEN        |  | GROUND-GREEN  |
| NEUTRAL      |  | NEUTRAL-WHITE |
| DIM(+)PURPLE |  | PURPLE        |
| DIM(-)PINK   |  | PINK          |

6. Cut off the corresponding terminals as required.

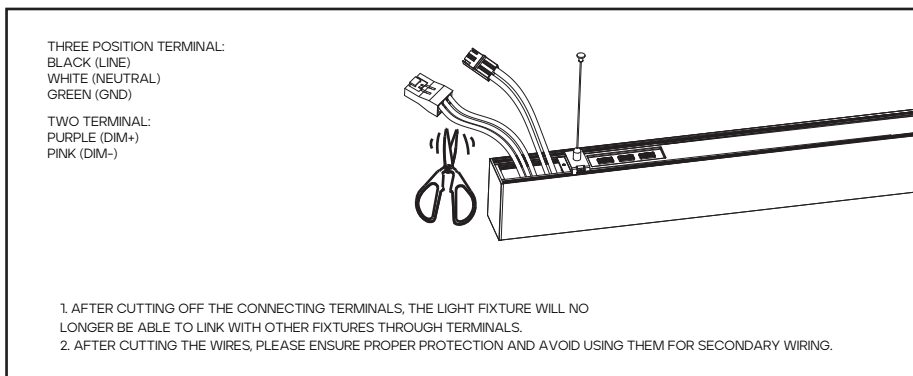


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.


7. Cut off the fixture's connectors for wiring to line voltage if needed, make wiring according to the diagram on the left

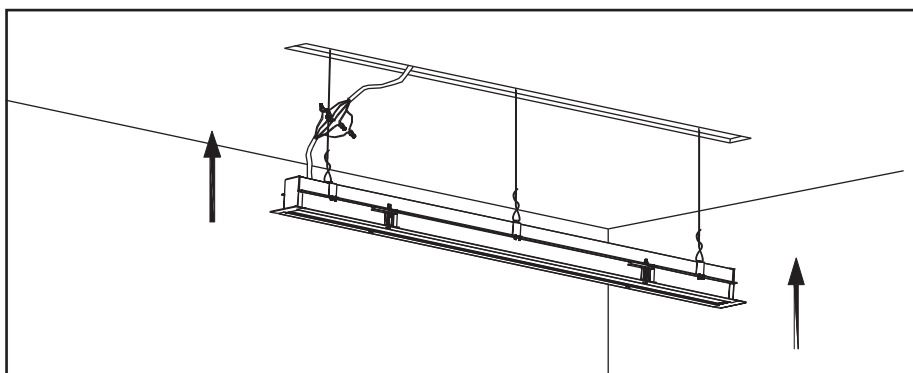


7. Use a Phillips screwdriver or electric screwdriver to rotate clockwise the holes on the embedded mounting bracket until the fixture is securely fixed to the ceiling.

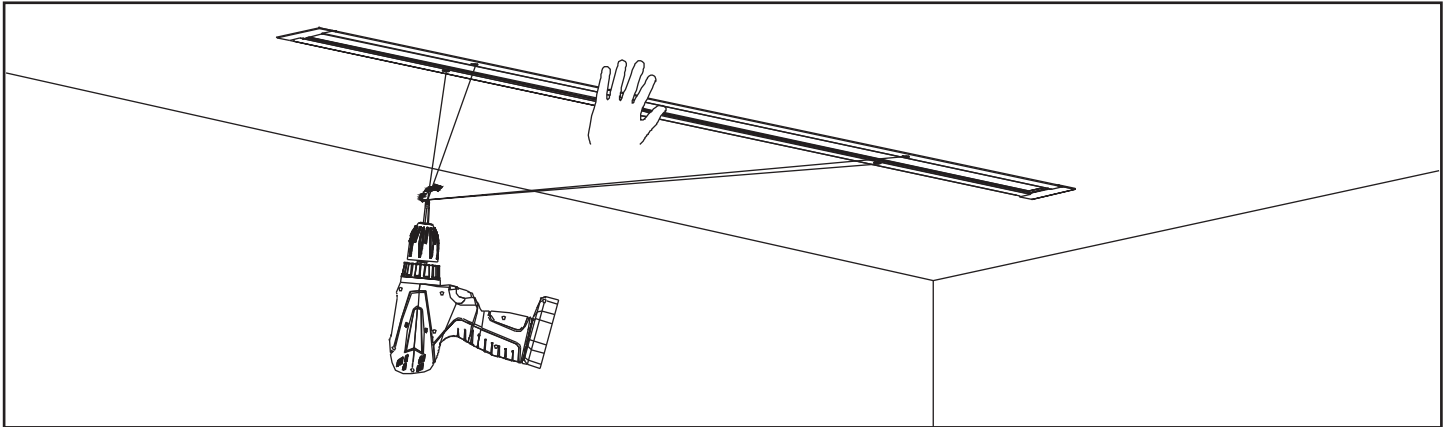



8.

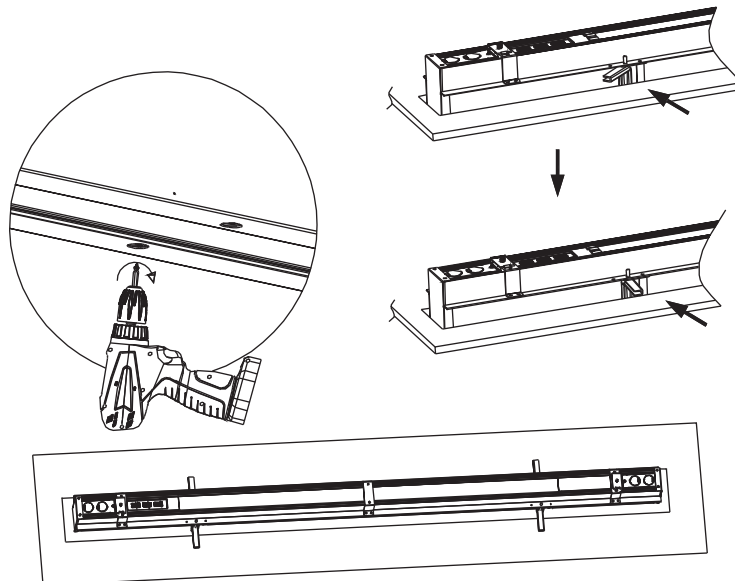

9. Put the rubber plug back in place to complete the installation.


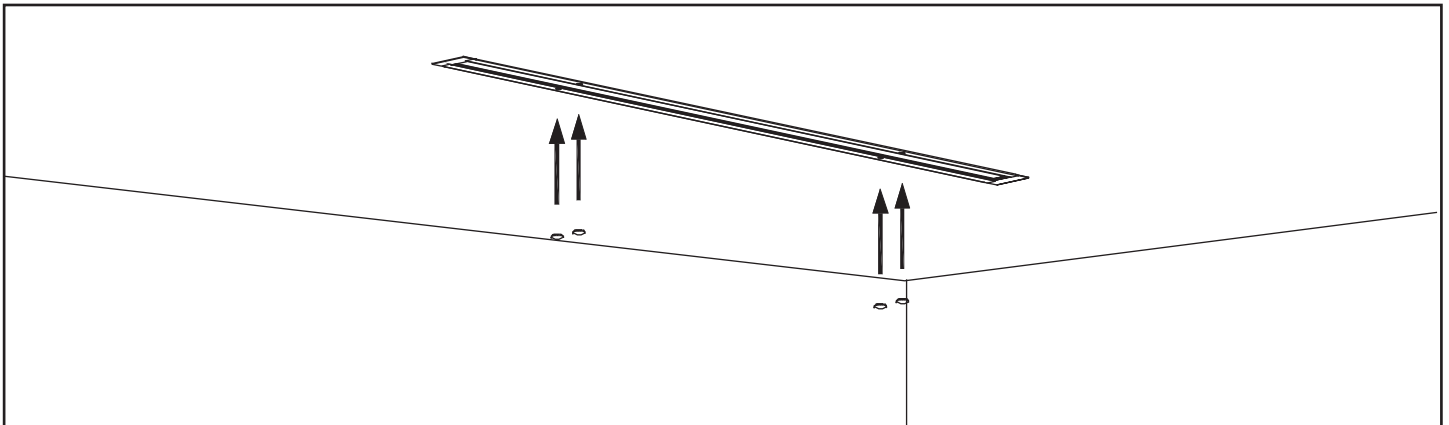


## WIRING

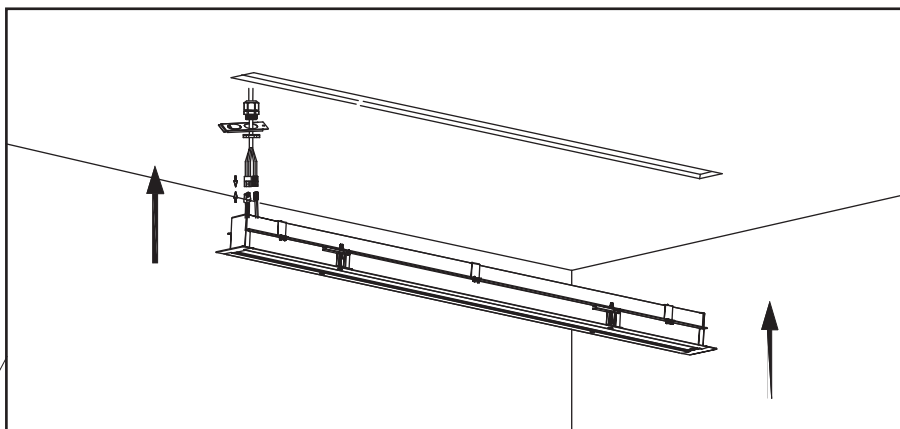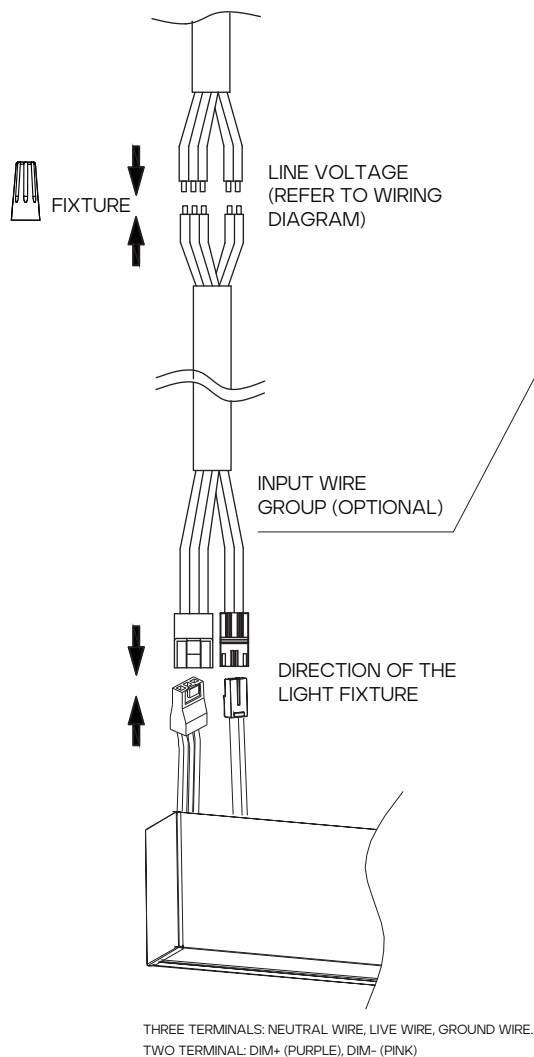

## DRIVER WIRE PACKAGE

\*SOLD SEPARATELY

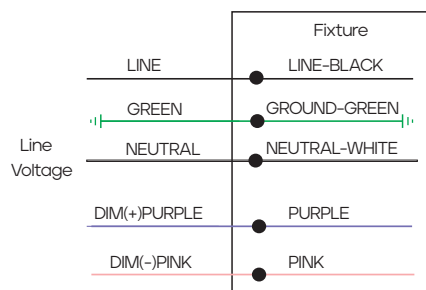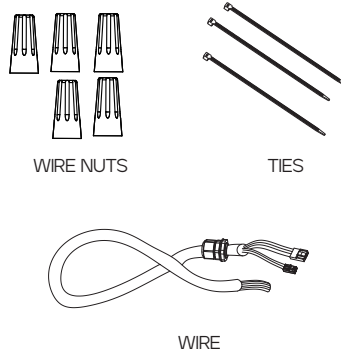

1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.