

NB-ROUTER

Simple configuration using a standard web browser



BACnet/IP or BACnet Ethernet connectivity





APPLICATIONS

The NB-ROUTER is perfect for applications with DLM segment networks originating from multiple locations, or for routing a segment network to a BAS via BACnet IP or BACnet Ethernet.

SPECIFICATIONS

- Operating voltage: 24 VAC/VDC from 120 VAC cord-end power supply (included)
- Quick disconnect 4-pin power connector
- Power LED
- RJ45 Ethernet port
- Ethernet and MS/TP activity LEDs
- Quick disconnect 3-wire MS/TP connector
- DIN-rail mounting clip
- Five year warranty

DIMENSIONS

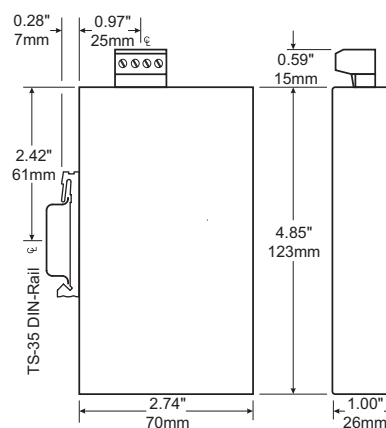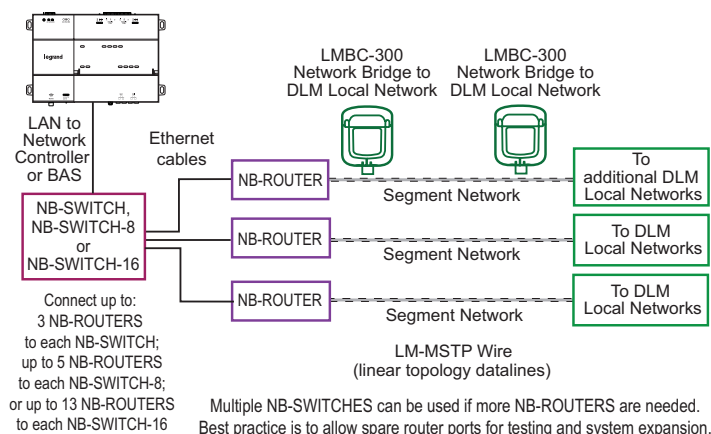

Catalog #		Description	Weight
<input type="checkbox"/>	NB-ROUTER	DLM Segment Network to BACnet IP Router	1 pound

27566r2 Rev 03/22

PROJECT	LOCATION/ TYPE
---------	-------------------