



Xitanium Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. The Advance Xitanium LED outdoor driver portfolio offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires for the most rugged applications. They operate to specification under wide temperature and electrical ranges to ensure reliability.


Specifications

Input Voltage (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load	Max Case Temp. (°C) Life/UL	Input Current (A)	Max Input Power (W)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protect (Combi Wave, KV)	Dimming Range (%)	Dimming Range (%)	Min Dimming Current (mA)	Drive Type
120	320	220-425	0.1-1.25	94.0	85 / 90	2.92	336	<10	>0.95	6	0-10V	10-100	70	CC
277				95.0		1.24		<15						


Enclosure

Item	In(mm)	Tolerance (mm)
Overall length (A1)	9.47(240.5)	+/-0.5
Mounting Length (A2)	8.91(226.2)	+/-0.5
Case Length (A3)	8.43(214)	+/-0.5
Case Width (B1)	2.35(59.8)	+/-0.5
Mounting Width (B2)	1.69(42.9)	+/-0.5
Case Height (C1)	1.46(37.2)	+/-1
Mounting Hole Diameter (D1)	0.23(5.9)	+/-0.5
Center of SimpleSet antenna (G1)	4.78(121.4)	+/-3

Mechanical Diagram

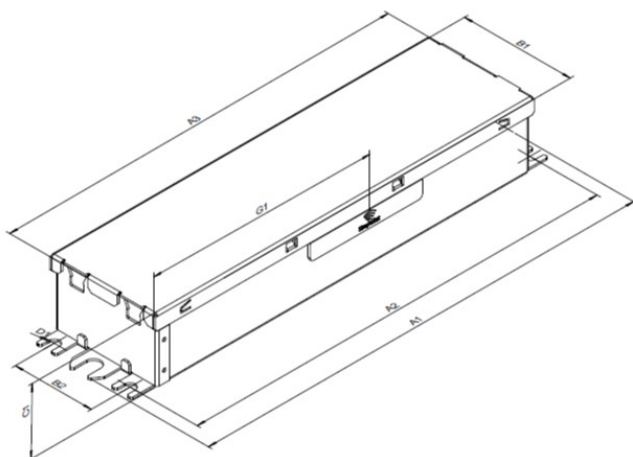

Wiring Diagram

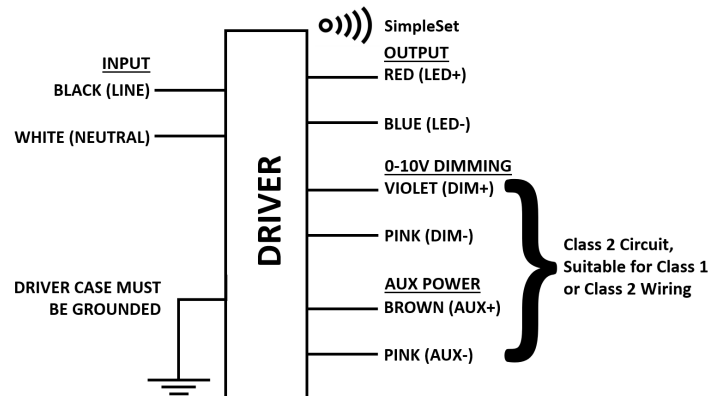

- Wire Length: 270 mm with 30 mm tolerance.
- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.

XI320C125V425PSF1

Features

- 50,000+ hour lifetime
- Excellent thermal performance
- 0-10V dimming suitable for UL Class 1 and Class 2 wiring

Benefits

- Enables long life luminaire designs
- Helps to maximize energy savings and allows application specific light levels
- Allows luminaire designs for ambient environments

Application

- Area
- Roadway
- Parking garages
- Floodlights
- High-bay, Mid-bay, Low-bay fixtures

Logistical data

Specification item	Value
Product name	XI320C125V425PSF1
EOC	XI320C125V425PSF1
Logistic code 12NC	9290 027 69613
Product code	XI320C125V425PSF1M
Pieces per box	10
Weight	900 gram

All the specifications are typical and at $T_{\text{ambient}} = 25^{\circ}\text{C}$ unless specified otherwise

Electrical input data

Specification item	Value	Value	Unit	Condition
Rated input voltage range	108...305		V_{ac}	Performance range
Rated input voltage	120	277	V_{ac}	
Rated input frequency	50...60	50...60	Hz	Performance range
Rated input current	2.92	1.24	A	@ rated output power @ rated input voltage
Rated input power	336.0	336.0	W	@ rated output power @ rated input voltage
Efficiency	94.0	95.0	%	@ rated output power @ rated input voltage

Electrical output data

Specification item	Value	Unit	Condition
Output voltage	220...425	V_{dc}	
Output voltage max.	573	V	Open Circuit Voltage
Output current	100...1250	mA	
Output current min programmable	100	mA	
Min output current	70	mA	
Output current tolerance \pm	5	%	within performance window
Output current ripple LF	≤ 15	%	Ripple = peak / average, < 3kHz
Output power	15.4...320.0	W	
Minimum performance output power	108	W	Power factor > 0.9 and THD < 20%

XI320C125V425PSF1

Control interfaces

Specification item	Value	Unit	Condition
Control method	0-10V		
Dimming range	10...100	%	Default range
Dimming Source Current	0.15	mA	
Maximum Dimming Voltage	12	V	
Dimming Leakage Current	0.014	mA	Max number of driver in parallel, refer to Design-in Guide

Isolation

U = Max. working voltage

Isolation per UL-8750	Input	Output	0-10V	Enclosure
Input	-	2U + 1kVac	2U + 1kVac	2U + 1kVac
Output	2U + 1kVac	-	2U + 1kVac	500Vac
0-10V	2U + 1kVac	2U + 1kVac	-	2U + 1kVac
Enclosure	2U + 1kVac	500Vac	2U + 1kVac	-


Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+55	°C	Higher ambient temperature allowed as long as T _{case-max} is not exceeded
T _{case-UL}	90	°C	Max. temperature measured at T _{case-point}
T _{case-life}	85	°C	C10 = 50000 hours measured at T _c -point

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at T _{case-point} is T _{case-life} . Maximum failures = 10%

XI320C125V425PSF1

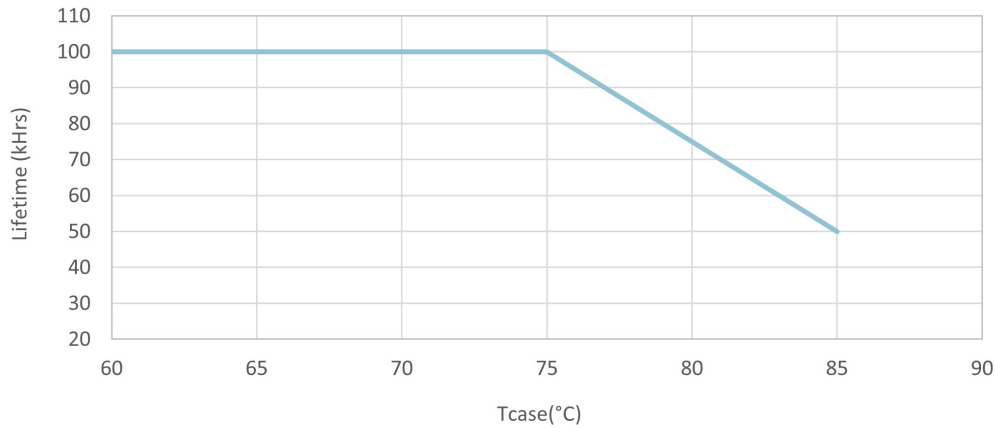

Maximum failures = 10%

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	NFC, SimpleSet	1050 mA	
Advanced Internal Thermal Protection	Yes		
Adjustable Light Output (ALO)	Yes		
Adjustable Light Output (ALO) min level	Yes		
Constant Light Output (CLO)	Yes		
0-10V	Yes		
Dynadimmer	Yes		
Dim to off	Yes		
OEM Write Protection (OWP)	Yes		


Non-programmable features

Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Overtemperature protection	Yes	Automatic recovering
+24V Auxiliary Power Supply	Yes	specifications in Appendix

XI320C125V425PSF1

Inrush current

Specification item	Value	Unit	Condition
Inrush current	86.8	A	Input voltage 120V
Inrush current	189	A	Input voltage 277V
Inrush peak width	160.5	μ s	Input voltage 120 V, measured at 10% height
Inrush peak width	372.2	μ s	Input voltage 277 V, measured at 10% height

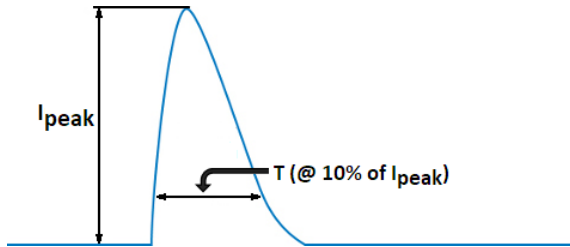

Surge immunity

Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6	kV	ANSI Surge Type 1.2/50us Combination Wave (w/t 2 ohm)
Mains surge immunity (comm. mode)	6	kV	ANSI Surge Type 1.2/50us Combination Wave (w/t 2 ohm)


Approbation

Specification item	Value
Approval Marks / Agency Approbations	NOM / RoHS / UL Class P / UL Listed US & Can
EMI standards	FCC Title 47 Part 15; Class A
Environmental protection rating	UL damp&dry, Type HL

XI320C125V425PSF1


Graphs

Operating window

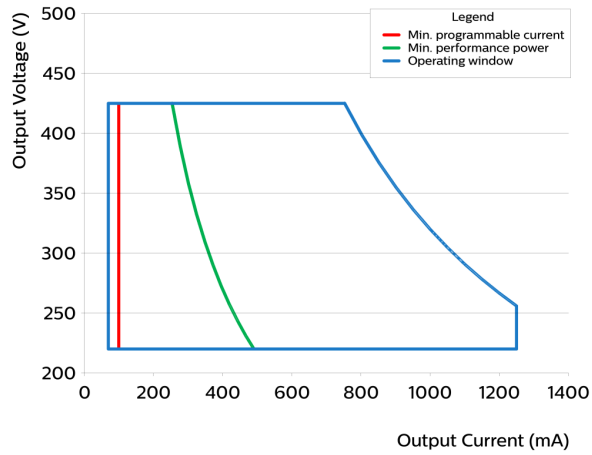

- Factory default output current is 1.05A.
- To get a 100% to 10% dimming range, the output current setting through AOC should be $\geq 0.7A$.
- Factory default minimum dimming is 10%. This can be adjusted between 10% and 100% using Advance MultiOne.


Over Temperature Protection

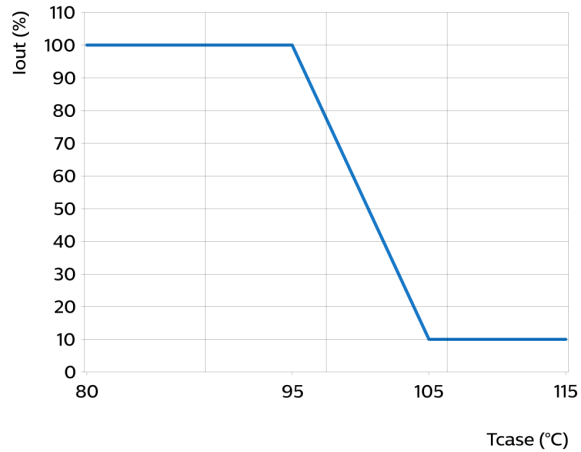


Adjustable via DTL with MultiOne programming

XI320C125V425PSF1

Power factor versus output power


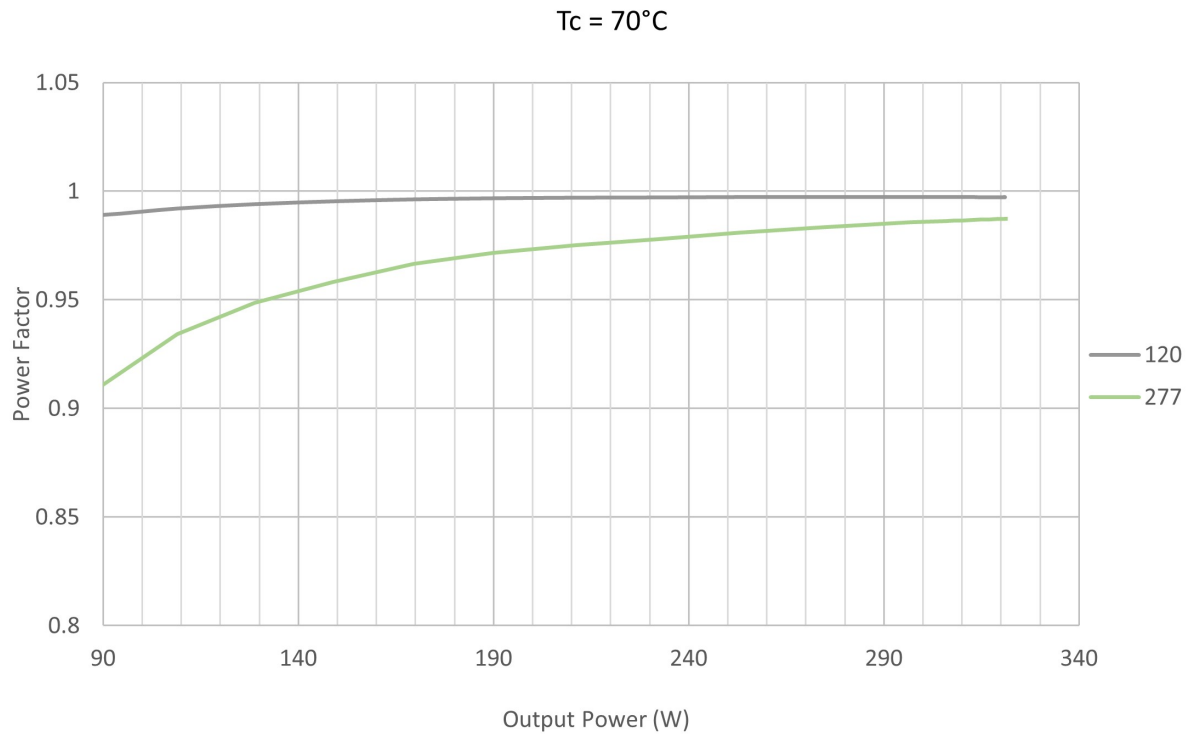


THD versus output power

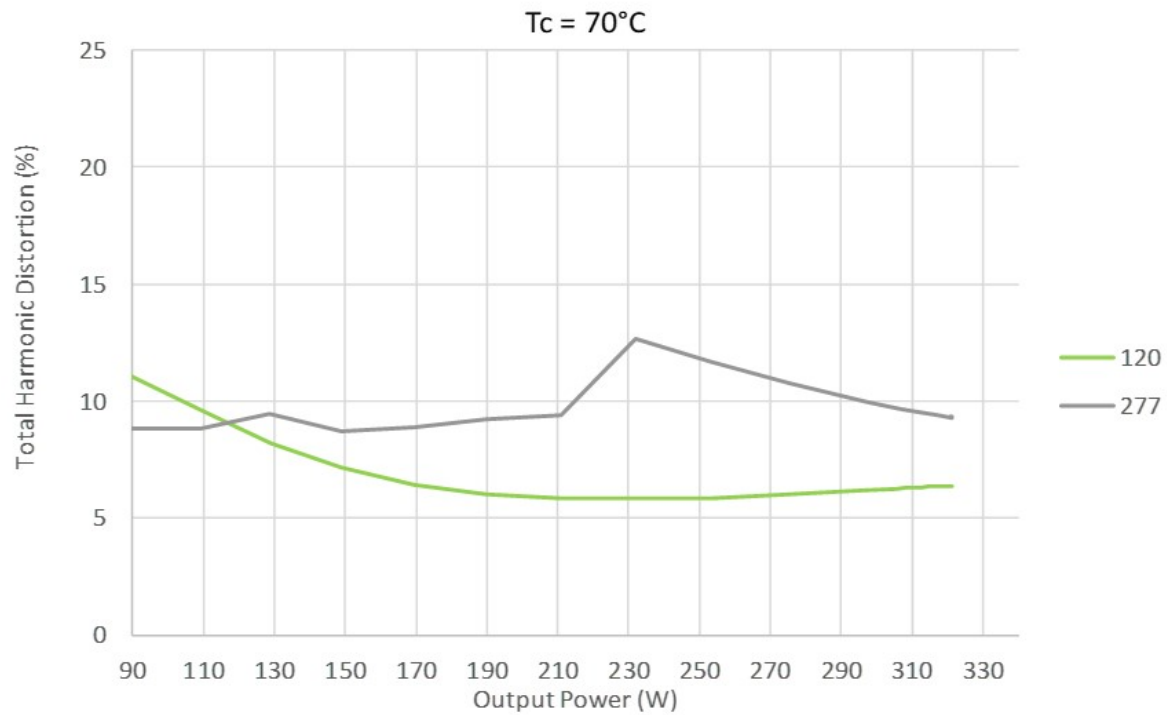



XI320C125V425PSF1

I_{out} as function of 0-10V interface

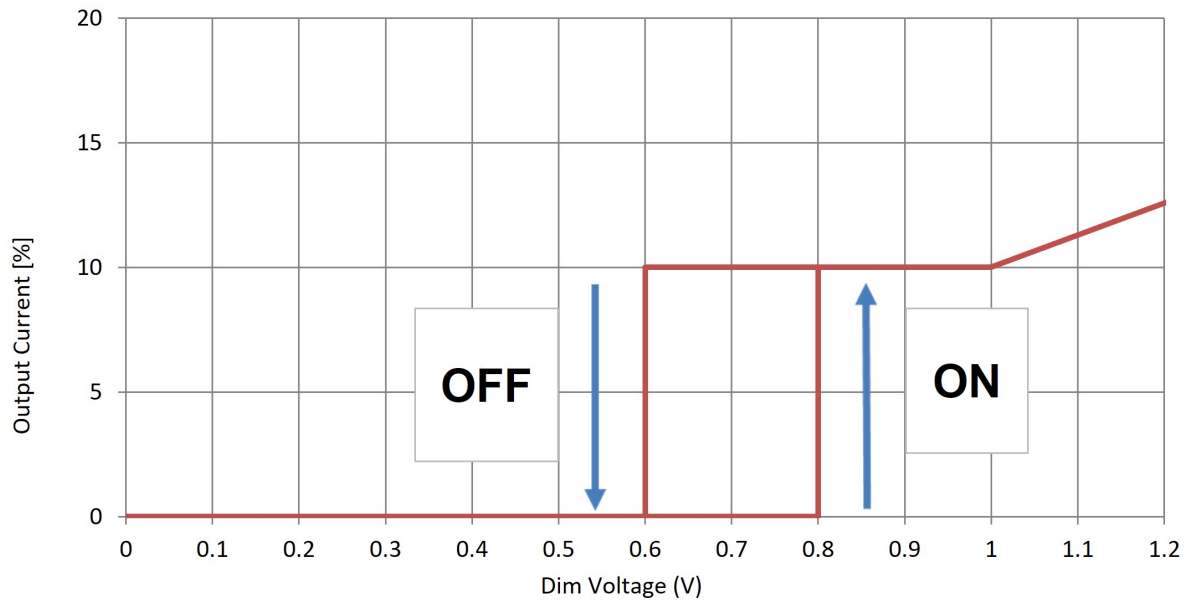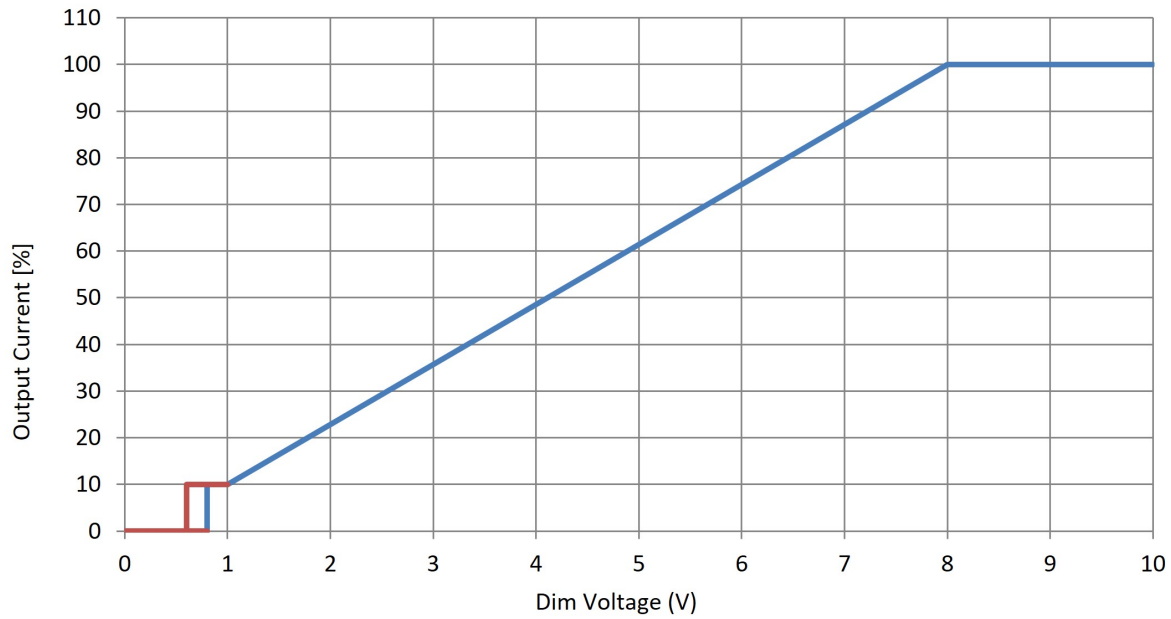

XI320C125V425PSF1

Efficiency as function of V_{out}

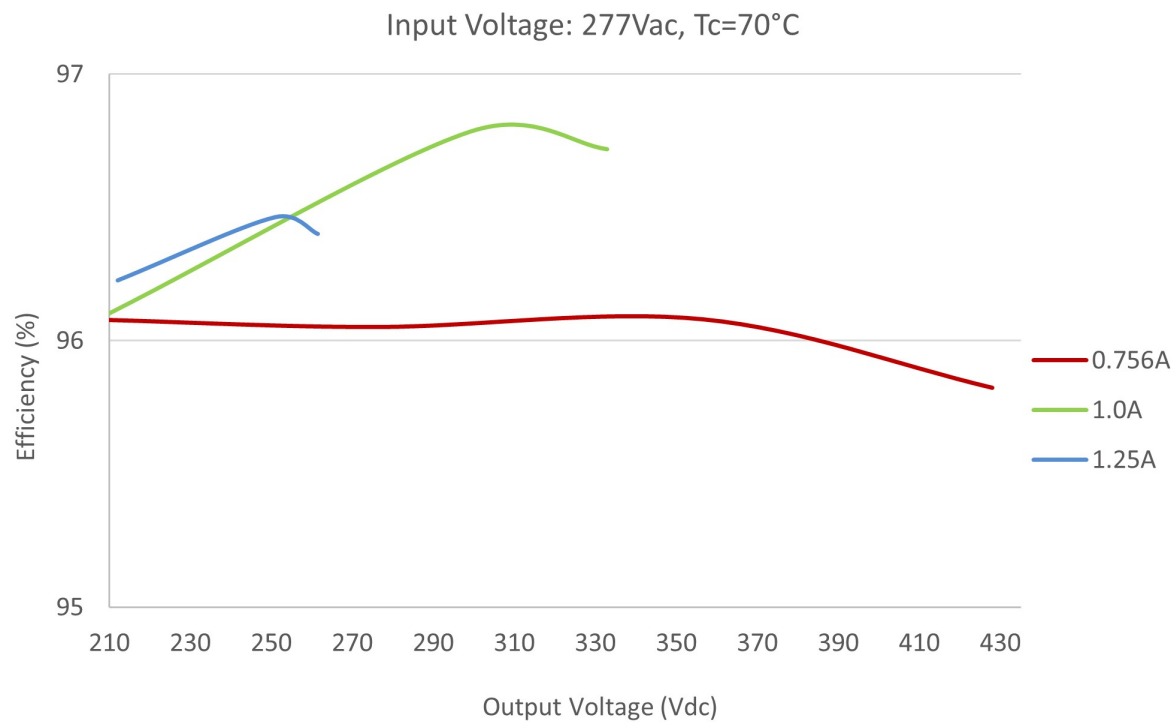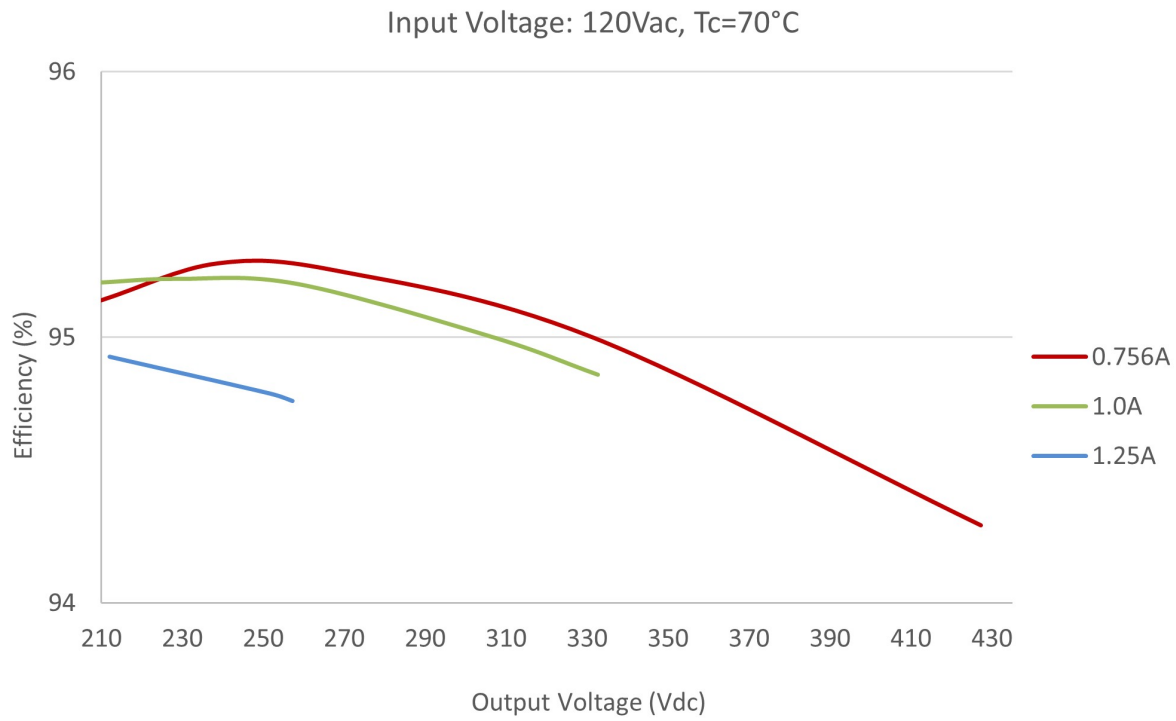

XI320C125V425PSF1

Appendix

Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Philips	Sunrise - SR1200ZTUNV

Dim to off function

Symbol	Parameter	Min	Typical	Max	Unit
Von	Turn on threshold	0.7	0.8	0.9	V
Voff	Turn off threshold	0.5	0.6	0.7	V
Ton	Turn on time			250	mS
Toff	Turn off time			1000	mS

Auxiliary Power Supply Output

Nominal Aux. Output Voltage	24Vdc ($\pm 10\%$, including line and load regulation)
Maximum Aux. Output Voltage Ripple (peak/average)	300mV
Rated Aux. Output Power	3W continuous, 10.5W peak for 1.2ms
Peak Power (<60s)	6W
Max. Output Current at Aux output port	125mA
Turn-on Time (mains applied to output within 90%)	<400 msec
Max. Voltage Overshoot during Turn ON	30Vdc
Max. Voltage Undershoot during Turn ON	8Vdc
Pulse current	250mA for 60 sec
Protections	Short Circuit & Open Circuit Protection for Aux. + and Aux. – Over-temperature Foldback

