

LED SPOTLIGHT-CANLESS RECESSED MINI PANEL - CCT SELECT

3", 4", 5", 6", 8"



5"
LR23749

12W 1000 LUMENS

4"
LR23756

10W 750 LUMENS

3"
LR23751

8W 540 LUMENS



8"
LR23765

18W 1500 LUMENS

6"
LR23761

12W 1000 LUMENS



COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	LUMEN EFFICACY	LIFETIME	COST/YR
3"	LR23751	LED/MINI3/PANEL/5CCT/RD2	8	120V	68	50,000	\$ 0.96
4"	LR23756	LED/MINI4/PANEL/5CCT/RD2	10	120V	70	50,000	\$ 1.20
5"	LR23749	LED/MINI5/PANEL/5CCT/RD	12	120V	83	50,000	\$ 1.44
6"	LR23761	LED/MINI6/PANEL/5CCT/RD2	12	120V	83	50,000	\$ 1.45
8"	LR23765	LED/MINI8/PANEL/5CCT/RD2	18	120V	83	50,000	\$ 2.17

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL	ENERGY STAR	PLATE (KNOCKOUT)
LR23751	LED/MINI3/PANEL/5CCT/RD2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	540	80	YES	YES	LR41002 (#0) LR41006 (#1) LR41010(R0)
LR23756	LED/MINI4/PANEL/5CCT/RD2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	750	80	YES	YES	LR41002 (#1) LR41006 (#3) LR41010(R1) LR41011 (#4)
LR23749	LED/MINI5/PANEL/5CCT/RD	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	YES	YES	LR41004 (#3) LR41006 (#4) LR41010 (R2)
LR23761	LED/MINI6/PANEL/5CCT/RD2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	YES	YES	LR41002 (#2) LR41006 (#5) LR41010 (R3)
LR23765	LED/MINI8/PANEL/5CCT/RD2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1500	80	YES	YES	

COMPATIBILITY

LR41002
New Construction Mounting Plate

KNOCKOUTS

KNOCKOUT SIZE

#0	Ø3.14" (Ø80 mm)
#1	Ø4.33" (Ø110 mm)
#2	Ø6.29" (Ø160 mm)

LR41004
New Construction Mounting Plate

KNOCKOUTS

KNOCKOUT SIZE

#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LR41006
New Construction Mounting Plate

KNOCKOUTS

KNOCKOUT SIZE

#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

LR41010
New Construction Mounting Plate

KNOCKOUT SIZE

#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)

LR41011
New Construction Mounting Plate


KNOCKOUTS

KNOCKOUT SIZE


#0	Ø2.48" (Ø63 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.34" (Ø85 mm)
#3	Ø3.74" (Ø95 mm)
#4	Ø4.25" (Ø108 mm)

LR35126
Emergency LED Driver


DIMENSIONS

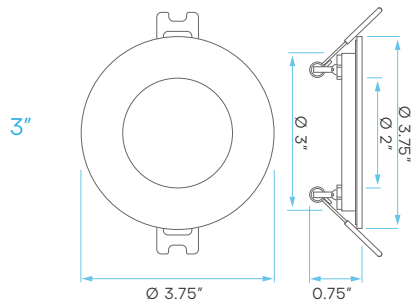


CUTOUT: Ø 3.25"

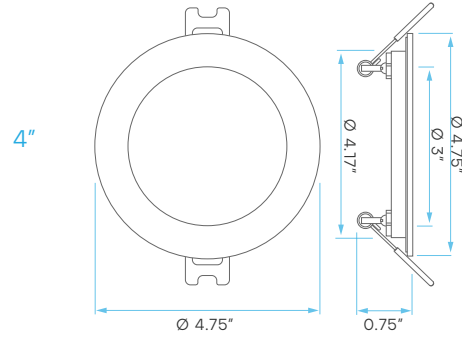


CUTOUT: Ø 4.25"

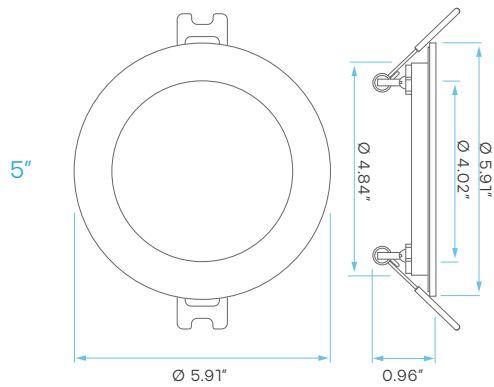

CUTOUT: Ø 5.12"

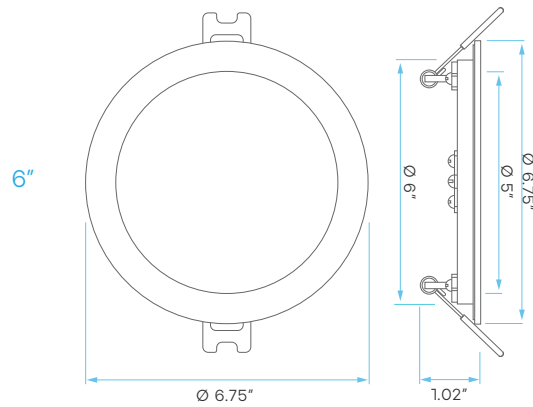


CUTOUT: Ø 6.3"

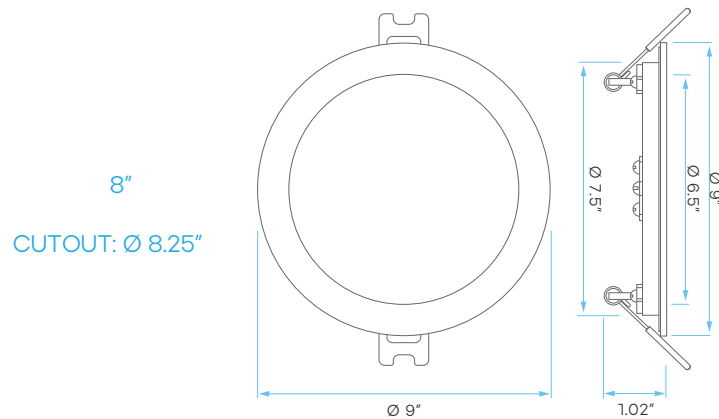

TRIM REPLACEMENT

*SOLD SEPARATELY



BLACK FINISH
3", 4" & 6"



BRUSHED NICKEL FINISH
4" & 6"



BRONZE FINISH
4" & 6"



BRASS FINISH
3", 4" & 6"

TRIM REPLACEMENT

*SOLD SEPARATELY

	MODEL	DESCRIPTION	TYPE	FINISH
3"	LR23850	LED/MINI3/5CCT/RD/TRIM/BK	3" ROUND TRIM REPLACEMENT	BLACK
	LR23857	LED/MINI3/5CCT/RD/TRIM/BRS	3" ROUND TRIM REPLACEMENT	BRASS
4"	LR23770	LED/MINI4/5CCT/RD/TRIM/BK	4" ROUND TRIM REPLACEMENT	BLACK
	LR23771	LED/MINI4/5CCT/RD/TRIM/BN	4" ROUND TRIM REPLACEMENT	BRUSHED NICKEL
	LR23772	LED/MINI4/5CCT/RD/TRIM/BZ	4" ROUND TRIM REPLACEMENT	BRONZE
	LR23858	LED/MINI4/5CCT/RD/TRIM/BRS	4" ROUND TRIM REPLACEMENT	BRASS
6"	LR23859	LED/MINI6/5CCT/RD/TRIM/BRS	6" ROUND TRIM REPLACEMENT	BRASS
	LR23776	LED/MINI6/5CCT/RD/TRIM/BK	6" ROUND TRIM REPLACEMENT	BLACK
	LR23777	LED/MINI6/5CCT/RD/TRIM/BN	6" ROUND TRIM REPLACEMENT	BRUSHED NICKEL
	LR23778	LED/MINI6/5CCT/RD/TRIM/BZ	6" ROUND TRIM REPLACEMENT	BRONZE

120-277V DRIVER

*SOLD SEPARATELY

	MODEL	DESCRIPTION	POWER	INPUT	OUTPUT
10W	LR23767	LED/MINI4/5CCT/UNV/DRIVER	10.5	120-277V	20-35DAC
12W	LR23768	LED/MINI6/5CCT/UNV/DRIVER	12	120-277V	20-35DAC

