

## LED SPOTLIGHT-CANLESS RECESSED MINI PANEL - CCT SELECT

3", 4", 5", 6", 8"



5"  
LR23749

12W 1000 LUMENS

4"  
LR23756

10W 750 LUMENS

3"  
LR23751

8W 540 LUMENS



8"  
LR23765

18W 1500 LUMENS

6"  
LR23761

12W 1000 LUMENS



COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K



## ELECTRICAL

|    | MODEL   | DESCRIPTION              | POWER | INPUT VOLTS | LUMEN EFFICACY | LIFETIME | COST/YR |
|----|---------|--------------------------|-------|-------------|----------------|----------|---------|
| 3" | LR23751 | LED/MINI3/PANEL/5CCT/RD2 | 8     | 120V        | 68             | 50,000   | \$ 0.96 |
| 4" | LR23756 | LED/MINI4/PANEL/5CCT/RD2 | 10    | 120V        | 70             | 50,000   | \$ 1.20 |
| 5" | LR23749 | LED/MINI5/PANEL/5CCT/RD  | 12    | 120V        | 83             | 50,000   | \$ 1.44 |
| 6" | LR23761 | LED/MINI6/PANEL/5CCT/RD2 | 12    | 120V        | 83             | 50,000   | \$ 1.45 |
| 8" | LR23765 | LED/MINI8/PANEL/5CCT/RD2 | 18    | 120V        | 83             | 50,000   | \$ 2.17 |

## PHOTOMETRIC

| MODEL   | DESCRIPTION              | COLOR (CCT)                   | TEMP       | LUMEN | CRI | ETL | ENERGY STAR | PLATE (KNOCKOUT)                                            |
|---------|--------------------------|-------------------------------|------------|-------|-----|-----|-------------|-------------------------------------------------------------|
| LR23751 | LED/MINI3/PANEL/5CCT/RD2 | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 540   | 80  | YES | YES         | LR41002 (#0)<br>LR41006 (#1)<br>LR41010(R0)                 |
| LR23756 | LED/MINI4/PANEL/5CCT/RD2 | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 750   | 80  | YES | YES         | LR41002 (#1)<br>LR41006 (#3)<br>LR41010(R1)<br>LR41011 (#4) |
| LR23749 | LED/MINI5/PANEL/5CCT/RD  | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 1000  | 80  | YES | YES         | LR41004 (#3)<br>LR41006 (#4)<br>LR41010 (R2)                |
| LR23761 | LED/MINI6/PANEL/5CCT/RD2 | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 1000  | 80  | YES | YES         | LR41002 (#2)<br>LR41006 (#5)<br>LR41010 (R3)                |
| LR23765 | LED/MINI8/PANEL/5CCT/RD2 | 2700K/3000K/3500K/4000K/5000K | CCT SELECT | 1500  | 80  | YES | YES         |                                                             |

## COMPATIBILITY

**LR41002**  
New Construction Mounting Plate

**KNOCKOUTS**

**KNOCKOUT SIZE**

|    |                  |
|----|------------------|
| #0 | Ø3.14" (Ø80 mm)  |
| #1 | Ø4.33" (Ø110 mm) |
| #2 | Ø6.29" (Ø160 mm) |

**LR41004**  
New Construction Mounting Plate

**KNOCKOUTS**

**KNOCKOUT SIZE**

|    |                  |
|----|------------------|
| #0 | Ø2.125" (Ø54 mm) |
| #1 | Ø2.83" (Ø72 mm)  |
| #2 | Ø3.75" (Ø95 mm)  |
| #3 | Ø5.19" (Ø132 mm) |

**LR41006**  
New Construction Mounting Plate

**KNOCKOUTS**

**KNOCKOUT SIZE**

|    |                  |
|----|------------------|
| #0 | Ø2.12" (Ø54 mm)  |
| #1 | Ø3.15" (Ø80 mm)  |
| #2 | Ø3.75" (Ø95 mm)  |
| #3 | Ø4.25" (Ø108 mm) |
| #4 | Ø5.25" (Ø132 mm) |
| #5 | Ø6.25" (Ø159 mm) |

**LR41010**  
New Construction Mounting Plate

**KNOCKOUT SIZE**

|     |                  |
|-----|------------------|
| #L0 | Ø2.12" (Ø54 mm)  |
| #L1 | Ø2.83" (Ø72 mm)  |
| #L2 | Ø3.75" (Ø95 mm)  |
| #0  | Ø2.125" (Ø54 mm) |
| #1  | Ø2.83" (Ø72 mm)  |
| #2  | Ø3.75" (Ø95 mm)  |
| #3  | Ø5.19" (Ø132 mm) |
| #R0 | Ø3.25" (Ø82 mm)  |
| #R1 | Ø4.33" (Ø110 mm) |
| #R2 | Ø5.25" (Ø132 mm) |
| #R3 | Ø6.25" (Ø160 mm) |

**LR41011**  
New Construction Mounting Plate


**KNOCKOUTS**

**KNOCKOUT SIZE**


|    |                  |
|----|------------------|
| #0 | Ø2.48" (Ø63 mm)  |
| #1 | Ø2.83" (Ø72 mm)  |
| #2 | Ø3.34" (Ø85 mm)  |
| #3 | Ø3.74" (Ø95 mm)  |
| #4 | Ø4.25" (Ø108 mm) |

**LR35126**  
Emergency LED Driver


## DIMENSIONS

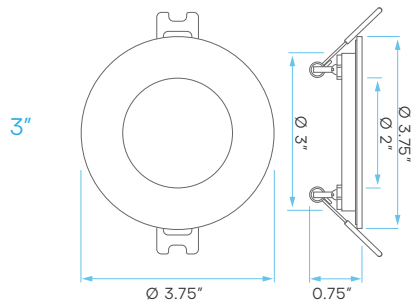


CUTOUT: Ø 3.25"

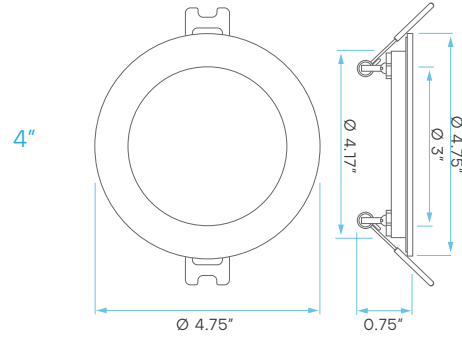


CUTOUT: Ø 4.25"

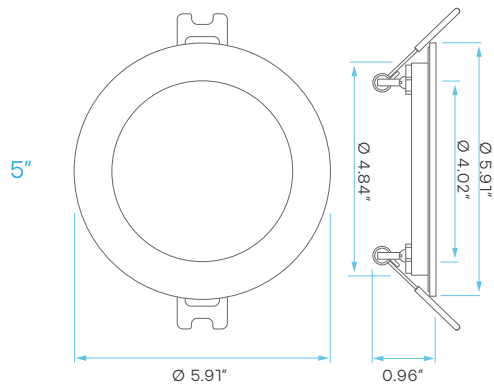

CUTOUT: Ø 5.12"

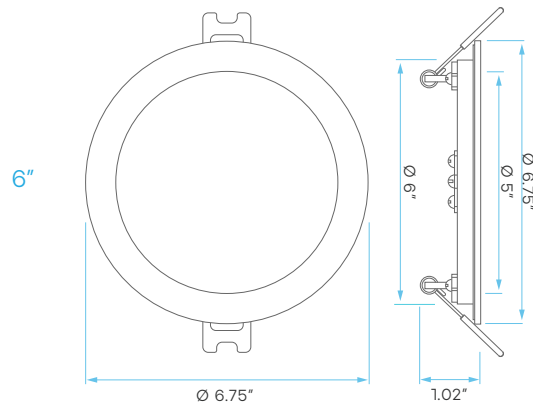


CUTOUT: Ø 6.3"

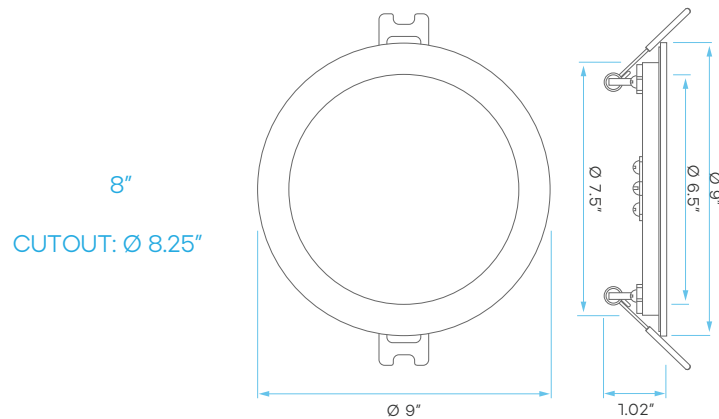

CUTOUT: Ø 8.25"

## TRIM REPLACEMENT

\*SOLD SEPARATELY



**BLACK FINISH**  
3", 4" & 6"



**BRUSHED NICKEL FINISH**  
4" & 6"



**BRONZE FINISH**  
4" & 6"



**BRASS FINISH**  
3", 4" & 6"

## TRIM REPLACEMENT

\*SOLD SEPARATELY

|    | MODEL   | DESCRIPTION                | TYPE                      | FINISH         |
|----|---------|----------------------------|---------------------------|----------------|
| 3" | LR23850 | LED/MINI3/5CCT/RD/TRIM/BK  | 3" ROUND TRIM REPLACEMENT | BLACK          |
|    | LR23857 | LED/MINI3/5CCT/RD/TRIM/BRS | 3" ROUND TRIM REPLACEMENT | BRASS          |
| 4" | LR23770 | LED/MINI4/5CCT/RD/TRIM/BK  | 4" ROUND TRIM REPLACEMENT | BLACK          |
|    | LR23771 | LED/MINI4/5CCT/RD/TRIM/BN  | 4" ROUND TRIM REPLACEMENT | BRUSHED NICKEL |
|    | LR23772 | LED/MINI4/5CCT/RD/TRIM/BZ  | 4" ROUND TRIM REPLACEMENT | BRONZE         |
|    | LR23858 | LED/MINI4/5CCT/RD/TRIM/BRS | 4" ROUND TRIM REPLACEMENT | BRASS          |
| 6" | LR23859 | LED/MINI6/5CCT/RD/TRIM/BRS | 6" ROUND TRIM REPLACEMENT | BRASS          |
|    | LR23776 | LED/MINI6/5CCT/RD/TRIM/BK  | 6" ROUND TRIM REPLACEMENT | BLACK          |
|    | LR23777 | LED/MINI6/5CCT/RD/TRIM/BN  | 6" ROUND TRIM REPLACEMENT | BRUSHED NICKEL |
|    | LR23778 | LED/MINI6/5CCT/RD/TRIM/BZ  | 6" ROUND TRIM REPLACEMENT | BRONZE         |

## 120-277V DRIVER

\*SOLD SEPARATELY

|     | MODEL   | DESCRIPTION               | POWER | INPUT    | OUTPUT   |
|-----|---------|---------------------------|-------|----------|----------|
| 10W | LR23767 | LED/MINI4/5CCT/UNV/DRIVER | 10.5  | 120-277V | 20-35DAC |
| 12W | LR23768 | LED/MINI6/5CCT/UNV/DRIVER | 12    | 120-277V | 20-35DAC |

