
### **BOLLARD RETROFIT BASE KIT**

## 407-478-3759 www.ilp-inc.com



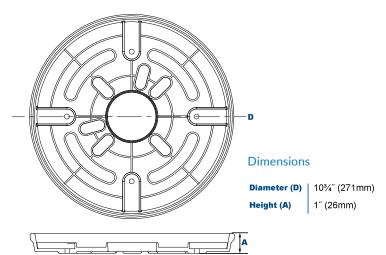

# **Bollard Mounting Cover Plate Dimensions** Diameter (D) Height (A)


Plate has threaded holes in patterns for each LEPG bollard size, Mounting bolts are included. Bollard base mounts to plate.

> Plate includes 4 set screws on sides at 90 degrees for locking base cover to mounting plate. Fully rotatable.

> > 11½" (292mm)

1½" (38mm)

Anchor Bolt Retrofit Adapter Plate allows for mounting with field installed drilled anchors.



6.5" bolt circle for Drilled Anchors. Used when existing anchor bolts do not fit 4-bolt or 3-bolt slots or are damaged. These must be cut off and new drilled anchors installed.

### **FEATURES**

Heavy duty die cast aluminum Anchor Bolt Retrofit Adaptor Plate

- Includes slots for existing anchor bolt mounting, 3@120°, 4@90° or 2@ 180° (3.5" to 5" diameter bolt circle). Slots can accommodate  $\frac{1}{4}$ " to  $\frac{3}{8}$ " diameter anchor bolts.
- · Includes large diameter slots for installing field drilled anchors (not included) in the event that the existing anchor bolt pattern does not fit slots, or anchor bolts are damaged or unusable.
- Includes 4 Stainless Steel leveling bolts with two leveling bubbles at 90° to level base prior to mounting new bollard.
- Center conduit entrance hole designed to accommodate two ¾" PVC conduits.

Heavy duty die cast aluminum Bollard Mounting Cover Plate

- Includes threaded holes in patterns to match ALL BLxT bollard base mounting plates.
- · Stainless Steel bolts for mounting bollard base plate.
- 4 Stainless Steel set screws at 90° for securing the cover plate to the adaptor plate. Cover plate can be rotated 360°.

Powdercoat finish over chromate conversion coating in Black or Bronze standard to match BLxT Bollards.

#### Anchor Bolt Retrofit Adapter Plate Bolt Circles for use with exciting anchor bolts.

