


LED SPOTLIGHT-CANLESS MINI PANEL - CCT SELECT 3", 4", 6"



5 CCT SWITCH ON DRIVER

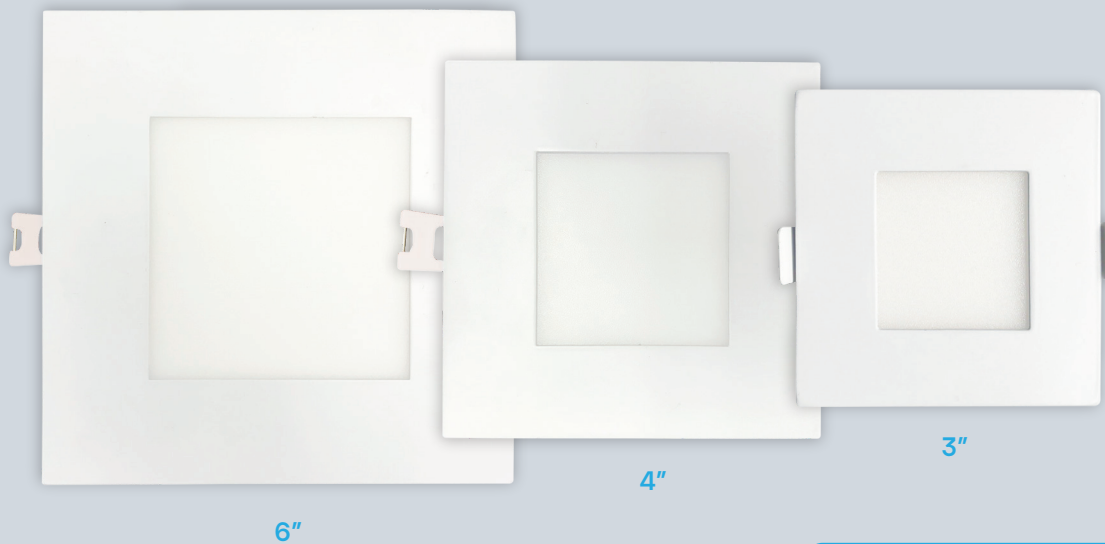

ROUND BACK

**CRI
80**

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

DIMMABLE




TRIAC

**IC
RATED**

**AIR
TIGHT**

**WET
LOCATION
RATED**

**5
YEAR
WARRANTY**

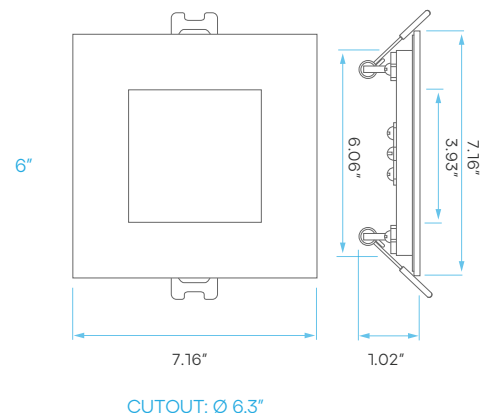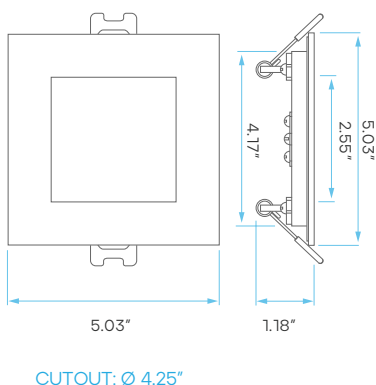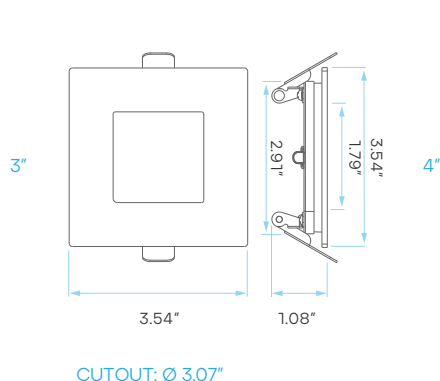

ELECTRICAL

MODEL		DESCRIPTION	POWER	INPUT VOLTS	LUMEN EFFICACY	LIFETIME	COST/YR
3"	LR23754	LED/MINI3/PANEL/5CCT/SQ2	8	120V	68	50,000	\$ 0.96
4"	LR23759	LED/MINI4/PANEL/5CCT/SQ2	10	120V	70	50,000	\$ 1.20
6"	LR23764	LED/MINI6/PANEL/5CCT/SQ2	12	120V	83	50,000	\$ 1.45

PHOTOMETRIC


MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL LISTED	PLATE (KNOCKOUT)
LR23754	LED/MINI3/PANEL/5CCT/SQ2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	540	80	YES	LR41002 (#0) LR41006 (#1) LR41010(R0)
LR23759	LED/MINI4/PANEL/5CCT/SQ2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	750	80	YES	LR41002 (#1) LR41006 (#3) LR41010(R1)
LR23764	LED/MINI6/PANEL/5CCT/SQ2	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	80	YES	LR41002 (#2) LR41006 (#5) LR41010(R3)

COMPATIBLE
WITH:

LR35126
Emergency
LED Driver




LR41002
New Construction
Mounting Plate



KNOCKOUTS		KNOCKOUT SIZE	
#0	#1	#0	Ø3.14" (Ø80 mm)
	#2	#1	Ø4.33" (Ø110 mm)
		#2	Ø6.29" (Ø160 mm)

LR41006
New Construction
Mounting Plate




KNOCKOUT SIZE	
#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

LR41010
New Construction
Mounting Plate



KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95 mm)



KNOCKOUT SIZE	
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132 mm)
#R3	Ø6.25" (Ø160 mm)

TRIM REPLACEMENT


3"



4"



6"



	MODEL	DESCRIPTION	TYPE	FINISH
3"	LR23855	LED/MINI3/5CCT/SQ/TRIM/BK	3" SQUARE TRIM REPLACEMENT	BLACK
4"	LR23773	LED/MINI4/5CCT/SQ/TRIM/BK	4" SQUARE TRIM REPLACEMENT	BLACK
6"	LR23779	LED/MINI6/5CCT/SQ/TRIM/BN	6" SQUARE TRIM REPLACEMENT	BLACK

120-277V DRIVER

*SOLD SEPARATELY

MODEL	DESCRIPTION	POWER	INPUT	OUTPUT
10W	LR23767	LED/MINI4/5CCT/UNV/DRIVER	10.5	120-277V 20-35DAC
12W	LR23768	LED/MINI6/5CCT/UNV/DRIVER	12	120-277V 20-35DAC

