




# **VANITY LIGHT & MINI-PENDANT**

### VF44 and MP44 series

- ▶ **DESIGN** VANITY LIGHT and MINI-PENDANT have a sleek, classic design that will help transform any space in your home. The height selectable cord allows you to customize the fixture and give it the desired look. Durable housing resistant to rust and impact provides many years of service. The opal glass shades grant you even light distribution. It is designed to operate on 120V circuits.
- ▶ BULBS The fixture includes a standard E26 medium base which is compatible with a variety of incandescent, CFL or LED bulbs less than 60W.
- Quick and easy hardwired installation.
- ▶ APPLICATION These fixtures create a bright light. VANITY LIGHT is perfect for bathroom spaces or any other common areas. MINIPENDANT is perfect for kitchen tables, bars, living room sitting areas, and workshops. You can hang these pendants one by one or in a group to create a specific style. They are also Damp Locations rated.
- ▶ **ADVANTAGES** ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

Catalog number	
Notes	
Туре	



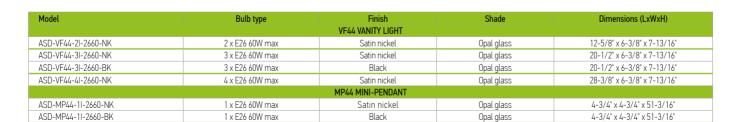

VF44-31

For most up-to-date spec sheets please refer to asd-lighting.com



VF44-21





# **VANITY LIGHT & MINI-PENDANT**


#### VF44 and MP44 series

### PRODUCT SPECIFICATIONS:

Construction & Materials	Charl				
Housing	Otoot	Steel			
Finish	Satin nickel, Black	Satin nickel, Black			
Shade	Opal glass	Opal glass			
	ASD-VF44-2I-2660-NK	2.5 lbs (1.1 kg)			
	ASD-VF44-3I-2660-NK	3.4 lb (1.5 kg)			
Weight	ASD-VF44-3I-2660-BK				
	ASD-VF44-4I-2660-NK	4.4 lb (2 kg)			
	ASD-MP44-1I-2660-NK	-NK 1 / II (0 / I)			
	ASD-MP44-1I-2660-BK	ASD-MP44-1I-2660-BK 1.4 lbs (0.6 kg			
Environmental system					
Work environment	Suitable for Damp Locations	Suitable for Damp Locations			
Operating temperature	-4°F to 113°F (-20°C to 45°C)	-4°F to 113°F (-20°C to 45°C)			
Electrical system					
Input voltage	120 V	120 V			
Regular and voluntary certific	ations				
5-year limited warranty	cETLus certified 4001256	cETLus certified 4001256			

### PACKAGE CONTENTS:

Description		
Vanity Light or Mini-Pendant		
Mounting bracket (A) only for Vanity Light	1	
Decorative cap nut (B) only for Vanity Light	2	
Mounting bracket (C) only for Mini-Pendant	1	
Fixture screw (D) only for Mini-Pendant	2	
Wire nut (E)	3	
Mounting screw (F)	2	
Box	1	



### INSTALLATION GUIDE

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

### **▲** WARNING


RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.


### INSTALLATION STEPS VANITY LIGHT:

- 1. Remove the metal ring from the E26 socket, attach the Glass Shade, insert a bulb and secure it with the metal ring.
- 2. Drive the mounting screws into the mounting bracket and attach it to the outlet box using two outlet box screws. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Carefully tuck all wires back into the outlet box.
- 3. Place the fixture on the wall by aligning the protruding mounting screws through the appropriate holes and tighten the fixture to the wall using two decorative cap nuts.



### **INSTALLATION STEPS MINI-PENDANT:**

- 1. Remove the metal ring from the E26 socket, attach the Glass Shade, insert a bulb and secure it with the metal ring.
- 2. Attach the mounting bracket to the outlet box using two mounting screws. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Carefully tuck all wires back in to the outlet box.
- 3. Place the fixture to the outlet box by aligning two holes on the ceiling plate to the mounting bracket. Tighten the ceiling plate to the mounting bracket using two fixture screws. Installation complete.



## ORDERING INFORMATION

Model	UPC	Pcs. per carton	Carton size	Carton weight	GTIN 14			
VF44 VANITY LIGHT								
ASD-VF44-2I-2660-NK	810050732659	6	18.9" x 15.4" x 22.8"	21.8 lbs	20810050732653			
ASD-VF44-3I-2660-NK	810050732666	8	24.4" x 21.7" x 22.8"	38.4 lbs	10810050732663			
ASD-VF44-3I-2660-BK	810128114554	4	21.7" x 12.8" x 22.8"	20.2 lbs	20810128114558			
ASD-VF44-4I-2660-NK	810050732673	4	29.9" x 12.8" x 22.8"	26 lbs	20810050732677			
MP44 MINI-PENDANT								
ASD-MP44-1I-2660-NK	810050732680	12	20.9" x 13.8" x 22.8"	26.3 lbs	20810050732684			
ASD-MP44-1I-2660-BK	810128114561	12	18.9" x 12.8" x 21.5"	23 lbs	10810128114568			

For most up-to-date spec sheets please refer to asd-lighting.com

