




L.T.F.

Dimmable Low Voltage LED Driver

15W DA15W-3001 120V Series
700mA Constant Current

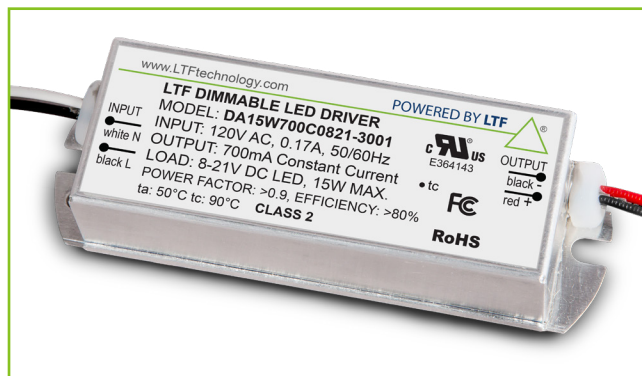

Efficiency	> 80%
Power Factor	> 0.9
Case TC	90°C Max.
Protection	Input / Output
Storage	-25°C / +80°C
Humidity	90% RH Max.
IP Rating	IP44
Class	Class 2 Power Supply
Dimming	ELV / Triac Dimmable



RoHS



FCC Part 15
Class B compliant



*Ask for more
information

FEATURES

- California Title 24 compliant
- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized/ Listed, UL 8750
- Auto-reset; short circuit, overload and thermal protection
- Dimmable with ELV & Triac Dimmers
- Aluminum casing for optimal heat dissipation
- Low profile, small form factor
- Flicker free dimming and excellent dimming range
- Class 2 and other than Class 2 power supply
- Efficient, high power factor, low THD $\leq 20\%$
- FCC Part 15 Class B Compliant
- Constant current or constant voltage models available

ELECTRICAL SPECIFICATIONS

Constant Current					
Model #	Input Voltage	Wattage	Output Voltage	Output Current	Case Form Factor
DA15W700C0821-3001	120V AC, 0.17A 60Hz	15W	8V - 21V DC	700mA	T11

MECHANICAL SPECS

Available Form Factor	
"T11"	95 (77) x 31 x 21mm

T11

