
3691057d 1 04.08.24

Maestro LED+ Fan/Light Control

Quiet fan-speed control with dimmer for dimmable LED and CFL bulbs.

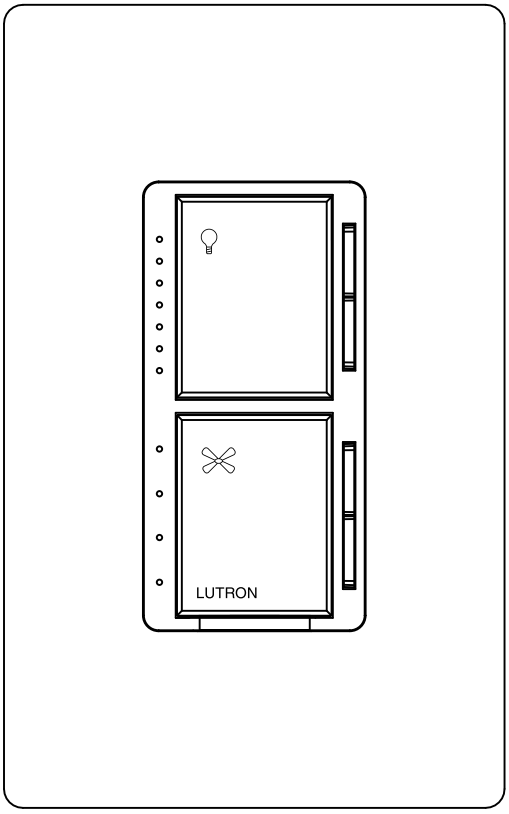

Wallplate sold separately

Features

- LED+ includes the most advanced technology for superior dimming of LED, CFL, halogen, and incandescent bulbs.
- Tap on to preset light level/fan speed; tap off.
- Tap twice for full on.
- Touch rocker to adjust light level/fan speed.
- Four fan speeds plus off.
- Indicator lights display light level and fan speed.
- Single-pole only.
- No canopy module required.
- Requires separate wires for fan and light.
- No neutral wire required.
- UL Listed to control:
  - — Dimmable LEDs
  - — Dimmable compact fluorescent lamps (CFLs) with integrated ballast
  - — Halogen
  - — Incandescent
- Low-end adjustment to accommodate a wide range of bulbs.
- FASS - Front Accessible Service Switch for fixture bulb replacement.
- Prevents tripping of AFCI breakers.
- 100% factory tested.
- Fault Detection/Indication
  - — Light pull chain off detection
  - — Lamp failure detection
  - — Short circuit detection/protection
- Formerly C•L.

Product Specific Features

- Capable of controlling up to 75 W dimmable LED/CFL or 250 W incandescent/halogen lighting loads.
- Capable of controlling up to 1.5 A paddle-type ceiling fan loads.

Colors and Finishes

Gloss Finishes

WH	White	IV	Ivory
AL	Almond	LA	Light Almond
GR	Gray	BR	Brown
BL	Black		

Satin Colors

SW	Snow	MN	Midnight
TP	Taupe	BI	Biscuit
PD	Palladium	HT	Hot

For the latest color offerings please see our website: http://www.lutron.com/satincolors

Model Number[1]

MACL-LFQ-XX	Single-pole
MACL-LFQH-XX[2]	Single-pole
MACL-LFQH-XX-C[3]	Single-pole

Notes:

[1] XX in the model number represents color/finish code; see section **"Colors and Finishes"** above.

[2] For clamshell packaging, add an "H" after "Q".

[3] Clamshell packaged product for Canada.

Job Name:	Model Numbers:	
Job Number:		

3691057d 2 04.08.24

Specifications

Regulatory Approvals

- UL Listed to U.S. and Canadian safety requirements
  - — UL 1472/CSA C22.2 184.1 (dimmer)
  - — UL 1917 / CSA C22.2 156 (fan)
  - — NOM
- Meets requirements of NEMA SSL7-2015

Power and Ratings

- 120 V~ 60 Hz
- 1.5 A fan rating - single fan only
- 75 W dimmable LED/CFL or 250 W incandescent/halogen light rating

Environment

- For indoor use only
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C)
- 0% to 95% relative humdity, non-condensing


Performance

- Power-failure memory
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power
- Dual power supply for light pull chain off detection

Application Requirements

- ***When using LEDs or CFLs, only bulbs marked or rated as DIMMABLE can be used.***
- For a complete list of approved DIMMABLE LEDs please visit www.lutron.com/LEDfinder
- Requires separate wires for fan and light.
- Not for use with DC motor fans or fans with remote controls.
- Not for use with bathroom or kitchen exhaust-type fans.

Dimensions

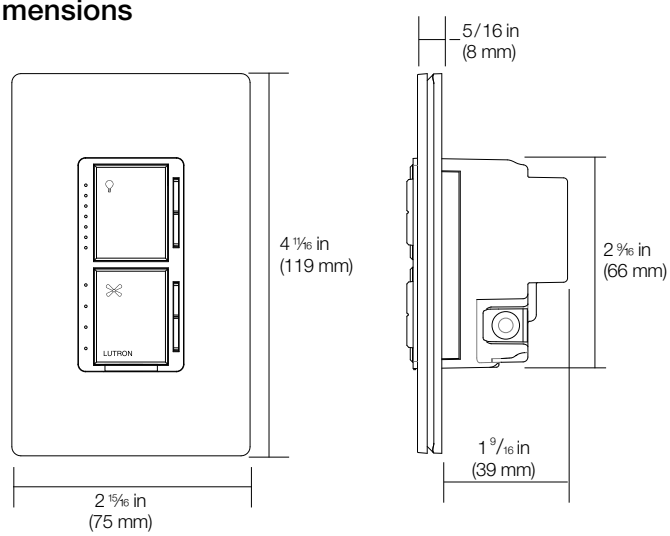


Note: Requires a U.S. wallbox 2 ½ in (64 mm) deep minimum.

Warranty

- 1 Year Limited Warranty
  For additional Warranty information, please visit www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf

Job Name:	Model Numbers:	
Job Number:		

Operation

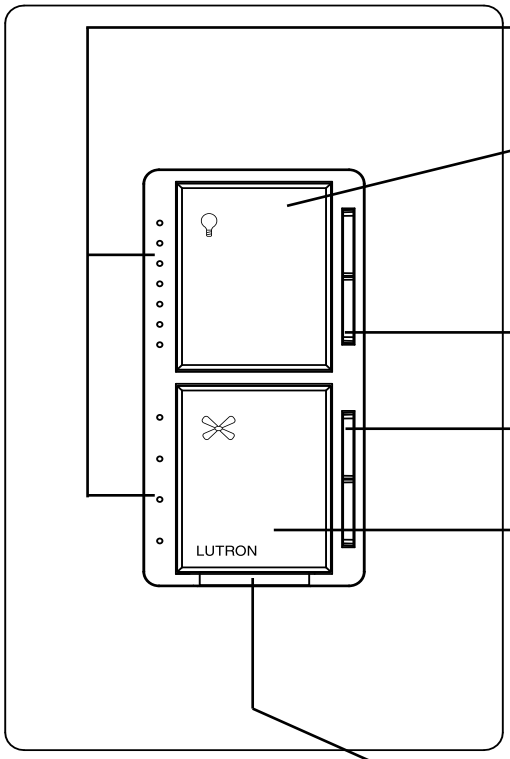

Indicator Lights
- Displays the current light level or fan speed

Light Tapswitch
- Tap on to favorite level
- Tap off
- Tap twice for full on
- Press, hold and release for gradual fade-to-off

Raise/Lower Rocker
- Press rocker to adjust light level

Raise/Lower Rocker
- Press rocker to adjust fan level


Fan Tapswitch
- Tap on to favorite level
- Tap off
- Tap twice for full on
- Four quiet fan speeds, plus off

FASS Switch
- Removes power from light and fan
- Pull tab out for bulb replacement

Job Name:	Model Numbers:	
Job Number:		

Wiring Diagrams

Single-Pole Wiring

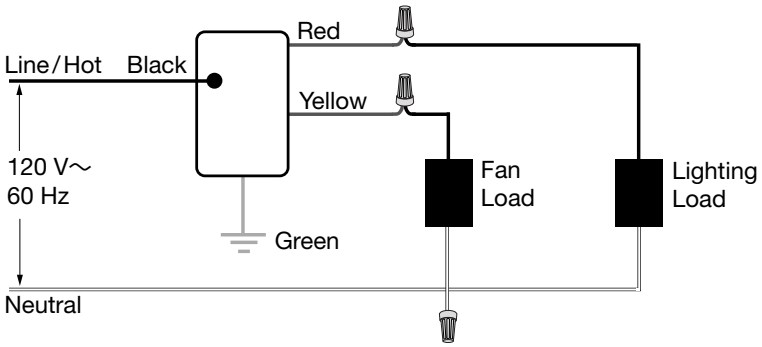

The Lutron logo, Lutron, Maestro, C•L, LED+, Satin Colors, and FASS are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. All other product names, logos, and brands are property of their respective owners.

Job Name:	Model Numbers:	
Job Number:		