SINCE 1945 KEYSTONE LIGHT MADE EASY®

DIRECT DRIVE LED CONNECT TO LINE VOLTAGE

COLOR SELECT

KT-LED82P-V-8CSE-D

2-PIN LED CFL REPLACEMENT LAMP

DESCRIPTION

8.5W 2-Pin LED Lamp | Color Select 3000/3500/4000K | G24d Base | Type B Line Voltage Compatible

RoHS Compliant

5 YEAR WARRANTY

LAMP TYPE: LED CFL Replacement
BULB TYPE: 2-Pin LED
BASE TYPE: G24d
WATTAGE: 8.5W
SELECTABLE COLOR TEMPERATURE: 3000/3500/4000K
COLOR RENDERING INDEX (CRI): ≥ 82
WARRANTY: 5 Years



PRODUCT FEATURES

- **Can be used in G24Q (4pin) and G24D (2pin) applications for ballast bypass**
- **Replaces 13W, 18W, and 26W legacy lamps with G24q, GX24q, G24d, and GX24d bases**
- Keystone Color Select technology (3000/3500/4000K)
- Approximately 50% more energy efficient vs legacy CFL lamps
- Up to 5x longer life vs traditional lamps
- Frosted diffuser that eliminates pixilation and glare
- Environmentally friendly. No mercury used
- Instant startup
- UL Classified Retrofit Kit
- Suitable for use in damp locations
- Not for use in enclosed luminaires
- Non dimmable
- 50,000 hour lifetime
- Operating temperature: -20°C/-4°F to 45°C/113°F
- Compliant with FCC Part 15 Class B

PERFORMANCE SPECIFICATIONS

Catalog Number	Wattage	Selectable CCT	Lumens	Efficacy	Input Voltage	CRI	Base Type	Beam Angle	Related Life
KT-LED82P-V-8CSE-D	8.5W	3000K	1100	129 lm/W	120-277V	≥ 82	G24d	110°	50,000 hrs
		3500K	1120	140 lm/W					
		4000K	1150	143 lm/W					

**Preset to 3000K*

SINCE 1945 KEYSTONE LIGHT MADE EASY®

DIRECT DRIVE LED CONNECT TO LINE VOLTAGE

COLOR SELECT

KT-LED82P-V-8CSE-D

2-PIN LED CFL REPLACEMENT LAMP

PHOTOMETRIC SPECIFICATIONS

POLAR CANDELA DISTRIBUTION

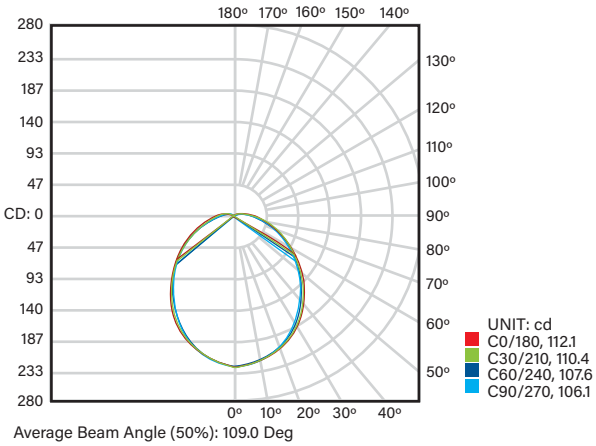

Average Beam Angle (50%): 109.0 Deg

ILLUMINANCE PLOT

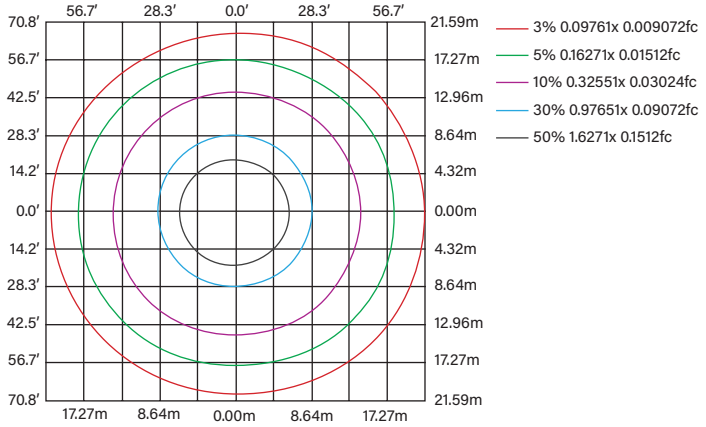

Mounting Height: 33′ (10.0M)

WIRING DIAGRAMS

BYPASS MAGNETIC BALLAST WITH 1 LAMP

BEFORE



AFTER



BYPASS ELECTRONIC BALLAST WITH 1 LAMP

BEFORE

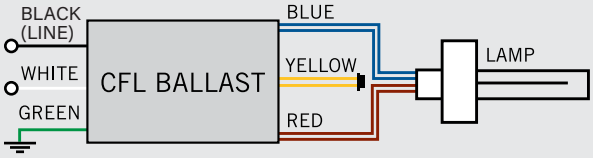

AFTER



BYPASS MAGNETIC BALLAST WITH 2 LAMPS

BEFORE

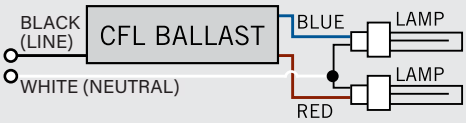

AFTER

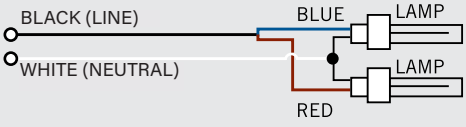

BYPASS ELECTRONIC BALLAST WITH 2 LAMPS

BEFORE

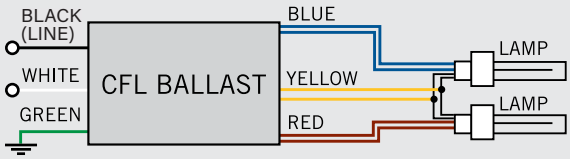

AFTER

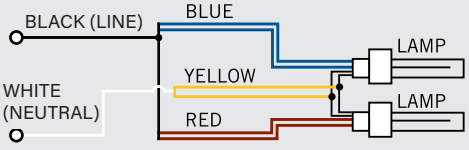

KT-LED82P-V-8CSE-D

2-PIN LED CFL REPLACEMENT LAMP

PHYSICAL SPECIFICATIONS

LAMP DIMENSIONS

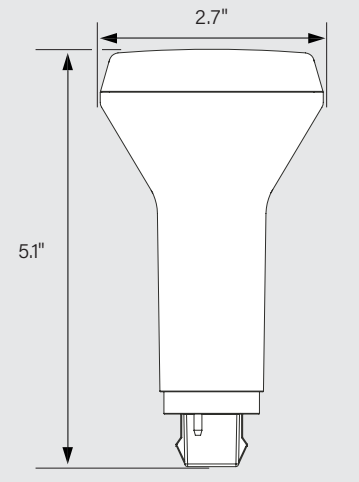

ORDERING INFORMATION

ORDER CODE	UPC	EASY CODE
KT-LED82P-V-8CSE-D	843654137698	XOY-00

CATALOG NUMBER BREAKDOWN

KT-LED82P-V-8CSE-D

1 2 3 4 5 6 7 8 9

1 Keystone Technologies
2 LED Lamp
3 Wattage
4 2-Pin Lamp Type
5 Vertical Orientation
6 80 CRI
7 Color Select
8 Color Select Designation
9 Direct Drive Series

8 Color Select Designation

E	3000/3500/4000K