
LED tape K2-1440-24 14.4 W/m, IP20

Ref. K2-1440-24

NEW

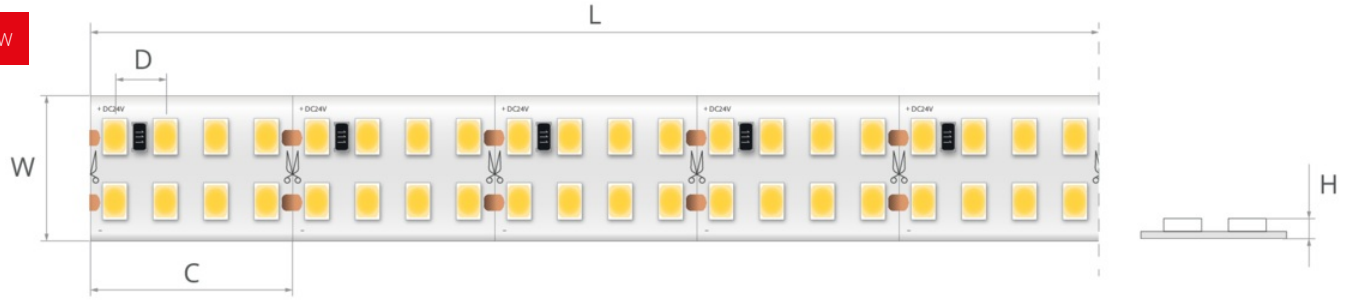

Dimensions: Width [W]: 14 mm | Height [H]: 1.2 mm | Max run length [L] : 7 m | Cut every [C]: 25 mm | LED spacing [D]: 3.13 mm

CRI 90+ | IP20 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Lifetime	**75000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**14.4 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**320**
Number of LEDs per cut section	**8 pcs**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	2360 lm/m	164 lm/W	**K2-27-1440-24**
3000 K	2425 lm/m	168 lm/W	**K2-30-1440-24**
3500 K	2425 lm/m	168 lm/W	**K2-35-1440-24**
4000 K	2450 lm/m	170 lm/W	**K2-40-1440-24**
5000 K	2450 lm/m	170 lm/W	**K2-50-1440-24**