

Dimmable Galaxy Cabinet 60 x 28



DESCRIPTION

The Galaxy Cabinet features a sleek mirrored design with integrated front-lit LED illumination for bright, even lighting. Adjustable glass shelves provide organized storage for everyday essentials, while the clean, modern form blends functionality with a refined aesthetic.

FEATURES & BENEFITS

- Front-lit
- LED lighting on both the front and back of the glass doors
- Dimmable with standard MLV/TRIAC wall switches
- Interior power on/off switch
- Three-door design
- Two adjustable glass shelves providing three tiers of storage
- Soft-close door
- Energy efficient LED technology
- LED Lifetime: Approx. 120,000 hours
- Copper-free, silver-backed glass
- 5 year warranty

AVAILABLE LED OPTIONS

- 3000K LED Strip
- 6000K LED Strip

SPECIFICATIONS


- **Dimensions:** 60" x 28"
- **Weight:** 102 Lbs
- **Ingress Protection Rating:** IP44
- **Input Voltage:** Hardwire 110V
- **Color Rendering Index:** CRI 90+
- **Power Requirement:** 110W
- **Brightness:** 12,373 Lumens

SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards
- International Certifications



Dimmable Galaxy Cabinet 60 x 28

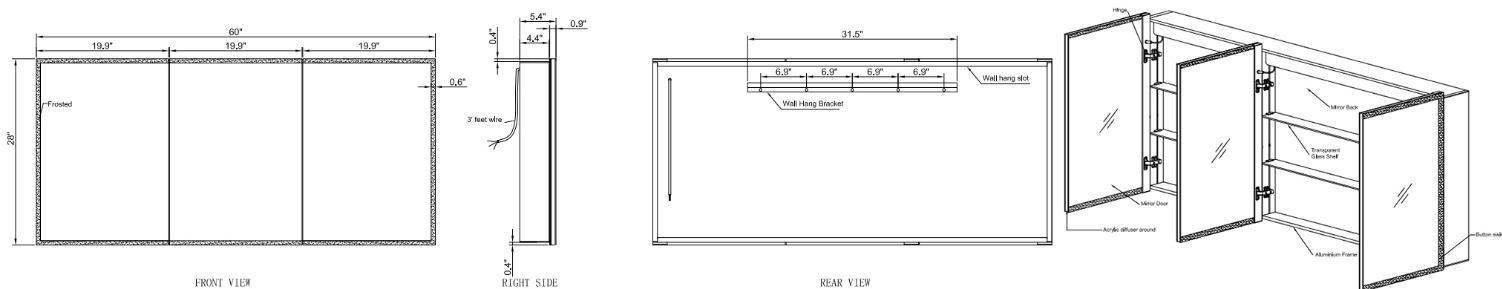

INSTALLATION

- Hold the Z-bar on the wall, level it, and mark screw points.
- Drill pilot holes; add wall anchors if not hitting a stud. Install Z-bar (wall piece) – Screw it firmly into place and keep it level.
- Hook the mirror's pre-installed bracket over the wall cleat.
- Match & attach 3 electrical wires from mirror to home electrical wires: Live to Live, Ground to Ground, Neutral to Neutral.

CARE & SAFETY

- Wear suitable eye wear protection when drilling. Use caution when using power tools near water, beware of hidden cables or pipes.
- Be cautious if drilling on tiled surfaces in case the drill slips. Applying a piece of masking tape on the wall before marking out fixing holes can help stopping the drill from moving.

CLEANING & MAINTENANCE

- It is recommended to clean the unit with a soft, dry, non-abrasive cloth when turned off.
- Never use cleaning agents or abrasive material on any type of surface finish.
- Do not strike glass components with hard or pointy items.
- Do not place very hot or cold items against or in close proximity to glass surfaces.